PERMANENT FILE

LITERATURE

Return this copy to

Advertising Division
Ingersoll-Rand
Phillipsburg, New Jersey

File AUG 1954

X-1850 2M 10-54

Compressed Air Magazine

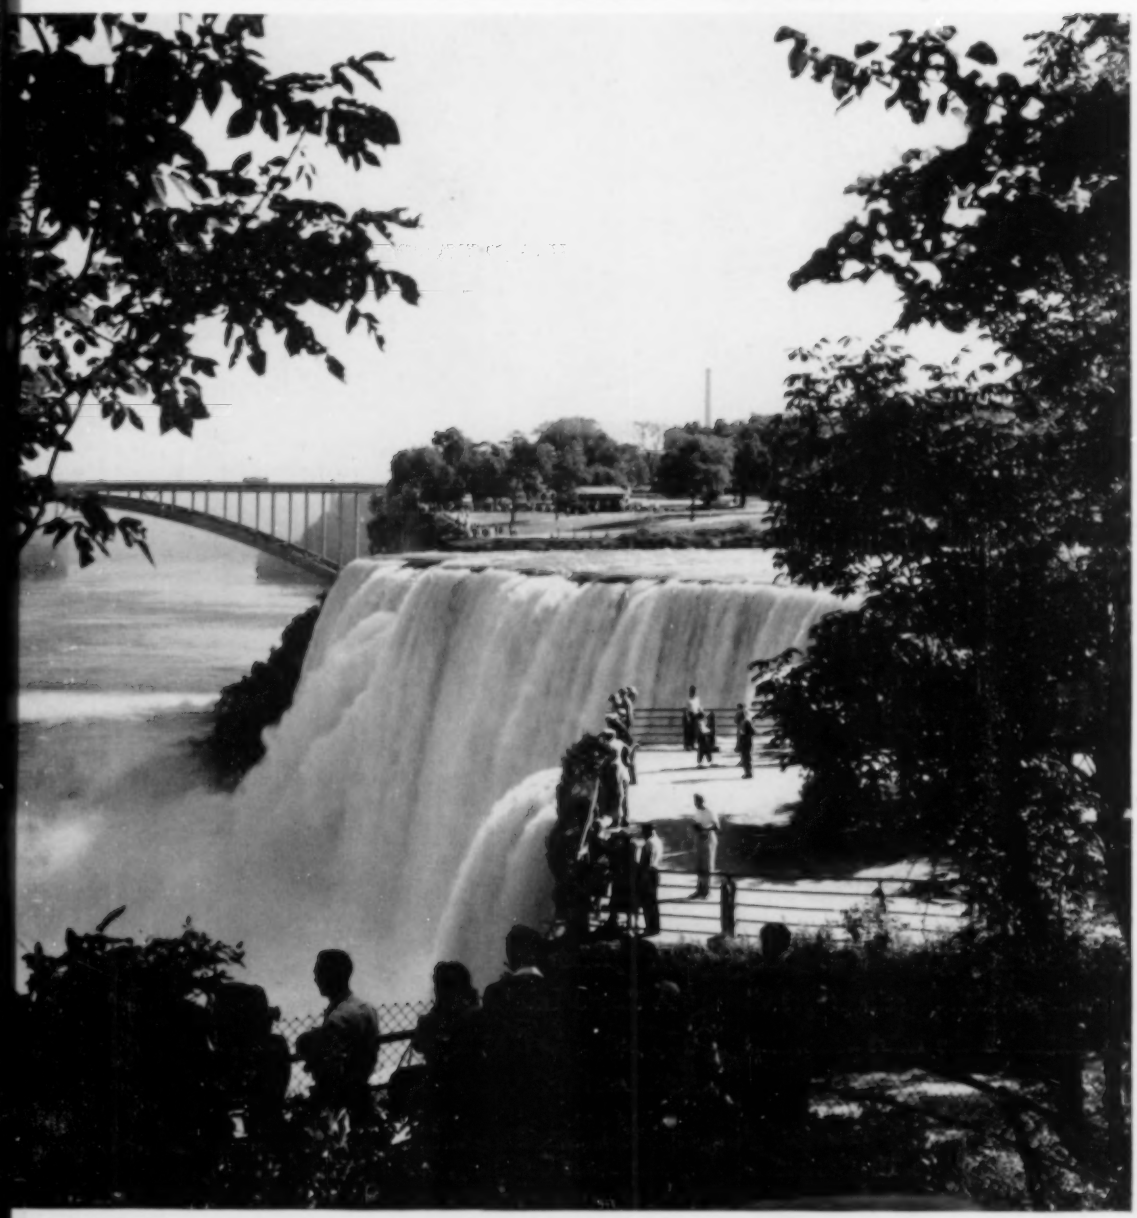

STILL A MECCA FOR SIGHT-SEERS

Glistening falls of Niagara retains its eye appeal for visiting hordes

D. W. CORSON-A. DEVANEY PHOTO

VOLUME 59 • NUMBER 8 NEW YORK • LONDON

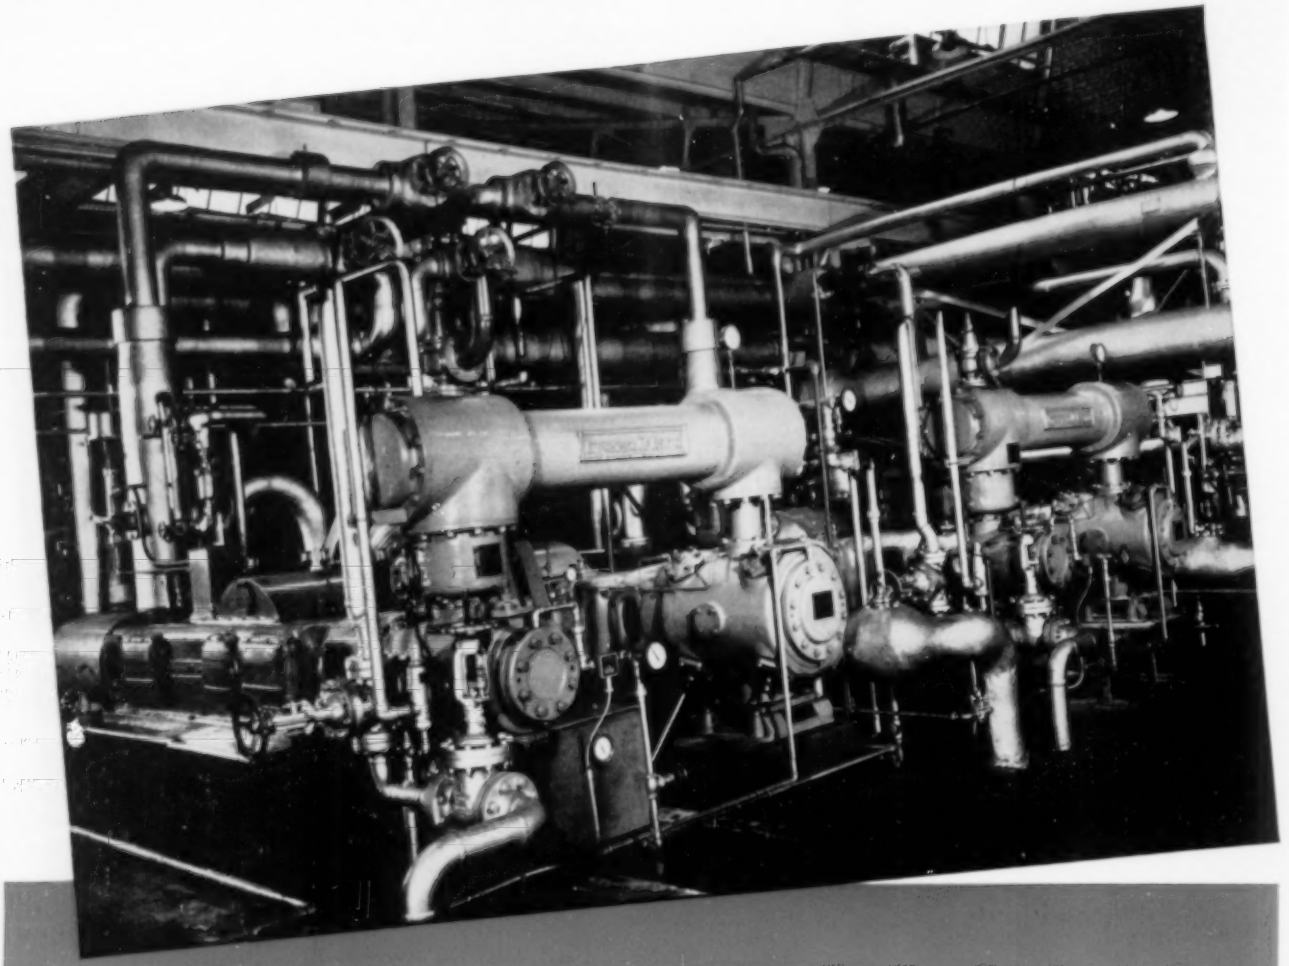

First step in selecting PROPER COMPRESSOR OIL

AIR COMPRESSORS operate under various conditions, and *no one* oil can be completely satisfactory for *all* of them. Thus, the first step in choosing the proper oil must be to determine the exact conditions under which the compressor operates.

This done, Texaco can easily supply the oil that is exactly right for the job. There is a complete line of Texaco air compressor oils especially designed to assure clean, efficient, low cost performance regardless of the type or size of compressor or the operating conditions.

A Texaco Lubrication Engineer will gladly help you make the proper selection. Just call the nearest of the more than 2,000 Texaco Distributing Plants in the 48 States, or write:

The Texas Company, 135 East 42nd Street, New York 17, N. Y.

TEXACO

TEXACO Air Compressor Oils

FOR ALL OPERATING CONDITIONS

Circle 1A on reply card

THESE STAYNEW ABSORPTION FILTERS

Protect Automatic Combustion Controls from All Oil, Moisture, Solids

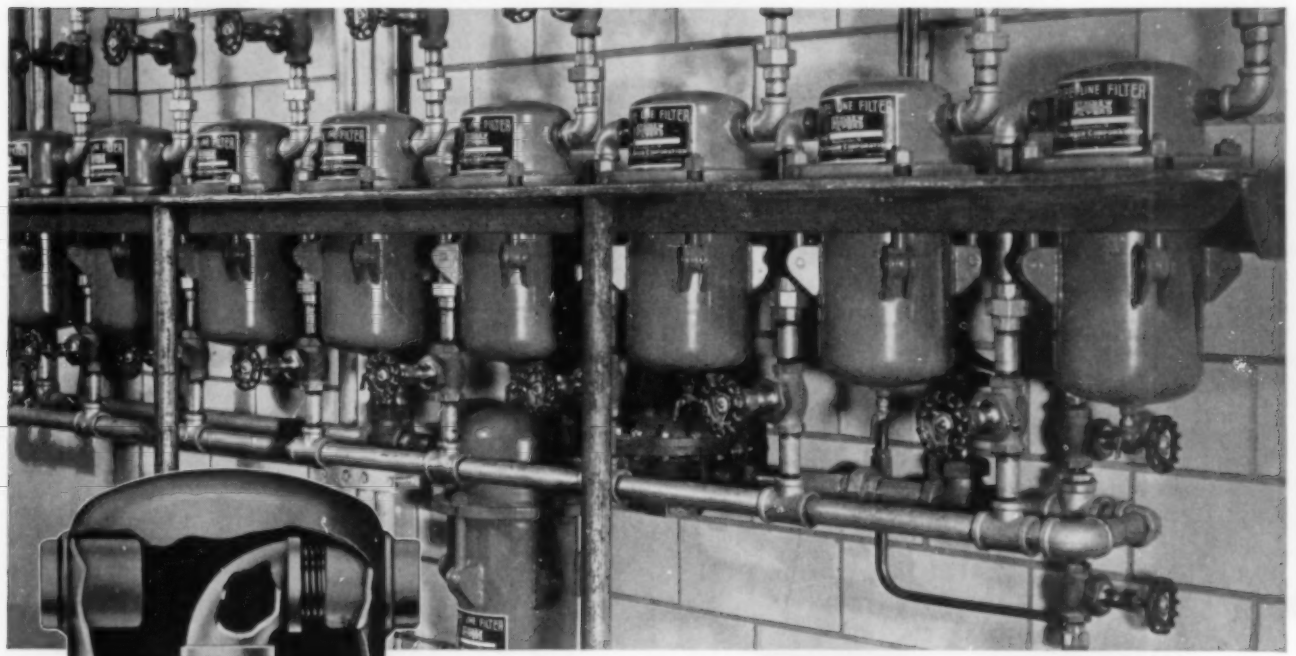

Specially developed Staynew Filters guarantee clean, dry air for Boiler Controls at Rochester Gas & Electric Corp.

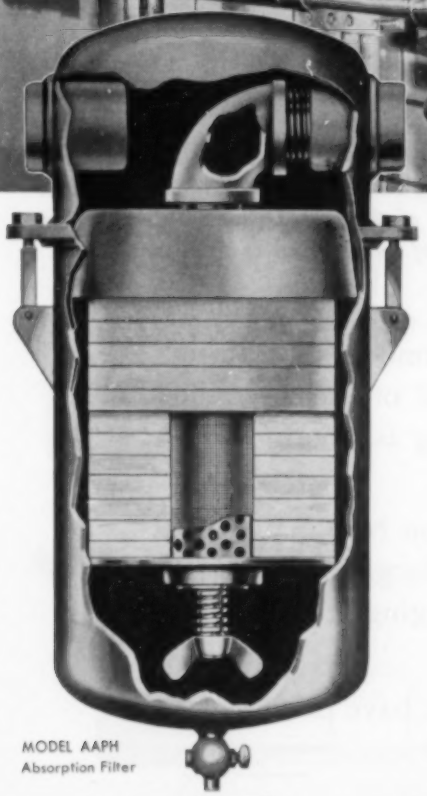

MODEL AAPH
Absorption Filter

The Rochester Gas & Electric's new automatic boiler controls needed *clean* air for efficient operation—air that's free of oil and moisture as well as solids. In order to accomplish this, coke and then charcoal filters were tried. An accumulation of oil continued to "gum up" the reducing valve feeding the master control. Our engineers were called in, and after thorough study, a special felt pad filter (shown at left) was developed and the new filters were installed. *Result*—no fouling has occurred in the control air system since the filters were installed in 1949.

If you have a special filtration problem call on Dollinger's experienced engineers. Write today for Bulletin B-1A.

Representatives in Principal Cities

DOLLINGER MFG. PROTECTOMOTOR U.S. PAT. OFF. STAYNEW FILTERS

DOLLINGER CORPORATION

7 Centre Pk., Rochester 3, N. Y.

ALL TYPES OF FILTERS FOR EVERY INDUSTRIAL NEED

Circle 2A on reply card

For the FIRST time
NUCLEAR POWER
is used for PROPULSION

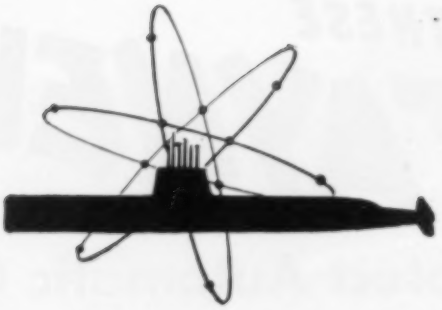

National Forge made many contributions to the "Nautilus." Among them were these two propulsion Shafts supplied to the Electric Boat Division of General Dynamics Corporation, builders of the Navy's new "Nautilus."

● The U. S. S. "Nautilus" is expected to outmode all existing transportation power methods. We're proud of our share in equipping her — and we're proud of our long association with the United States Navy.

Over the years the Navy has come to rely on National Forge facilities: the skill and abilities of the metallurgists, heat-treat experts, and skilled machinists to turn out forgings to their exact specifications.

When next you need forgings, why not have them
NATIONAL-FORGED?

STEEL MAKERS ☆ FORGESMITHS
HEAT TREATERS ☆ MACHINISTS

NF **National Forge**
AND ORDNANCE COMPANY
Irvine, Warren County, Pennsylvania

Circle 3A on reply card

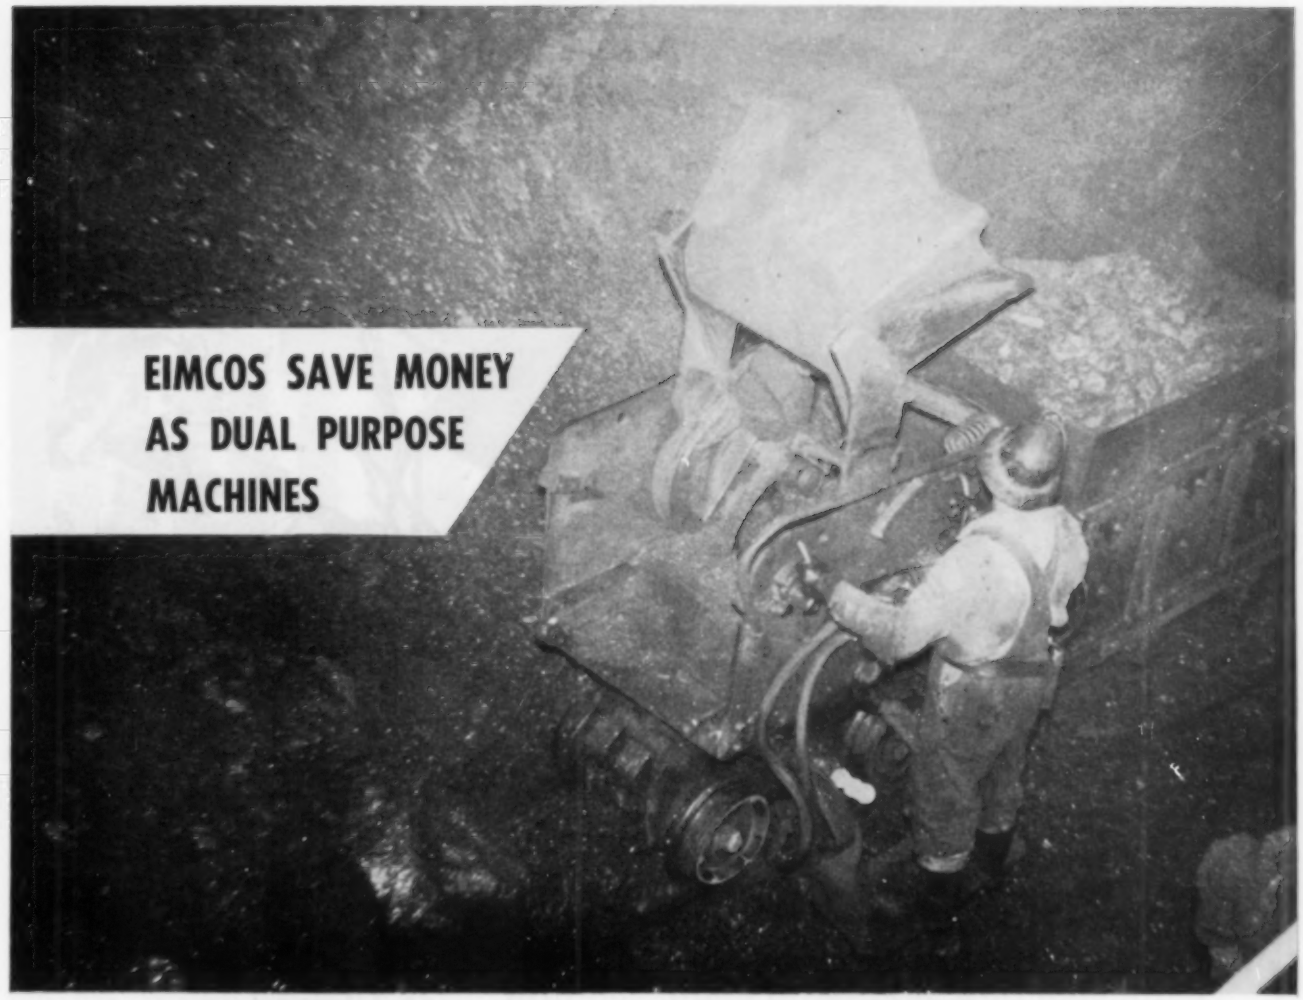

EIMCOS SAVE MONEY AS DUAL PURPOSE MACHINES



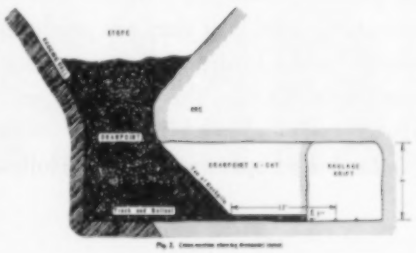

Eimco Loaders are being used for production as well as development work. This dual application for loading equipment has been advanced by numerous large companies who are now mining by drawhole systems including block caving, cut and fill or shrinkage when ore bodies stand more or less upright and even in scraper applications where the ore bodies slope too little to run freely. The idea being to scrape or shoot the ore so that it falls to a station at haulage level where it can be quickly loaded by an Eimco RockerShovel.

These sketches show two examples of methods in use to bring broken ore to haulage level at a minimum cost and provide a place to load mechanically. Many other systems are in use and Eimco Engineers will be glad to advise on layouts that might fit your needs.

THE EIMCO CORPORATION

Salt Lake City, Utah—U.S.A. • Export Offices: Eimco Bldg., 52 South St., New York City

New York, N. Y. Chicago, Ill. San Francisco, Calif. El Paso, Texas Birmingham, Ala. Duluth, Minn. Kellogg, Ida. London, Eng. Paris, France Milan, Italy

You Can't Beat An Eimco

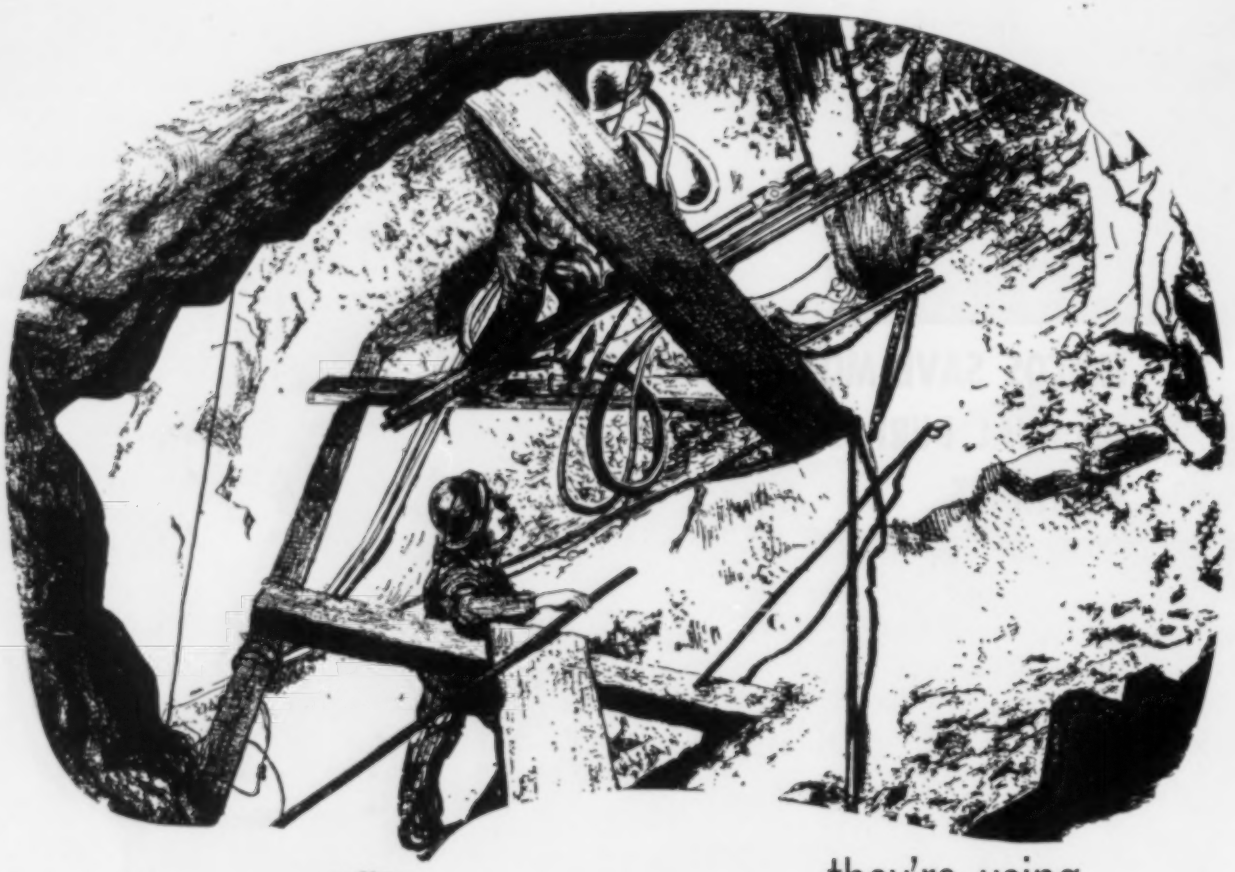

they're using CRUCIBLE HOLLOW DRILL RODS at Climax

High on Colorado's continental divide, the Climax Molybdenum Company is working the largest underground mine in the United States.

As an example of the size of this operation, just one cavity — the "Glory Hole" — was made by the removal of 70 million tons of ore. And regular production will soon be at the rate of 28,000 tons of ore per day.

It's a job that demands skillful mining technique... and the best of equipment. That's why Crucible Hollow Drill Rods are extensively used. For they are produced to *tool steel standards* by the leading producer of tool and special purpose steels. To you, this means dependability — fewer broken rods and lost bits. So for *lowest cost per foot of hole drilled* specify Crucible Hollow Drill Rods.

Visit us at Booth 600
American Mining Congress Show
San Francisco, California
September 20-23

CRUCIBLE first name in special purpose steels

54 years of Fine steelmaking

HOLLOW DRILL ROD

CRUCIBLE STEEL COMPANY OF AMERICA, GENERAL SALES OFFICES, OLIVER BUILDING, PITTSBURGH, PA.

REX HIGH SPEED • TOOL • REZISTAL STAINLESS • MAX-EL • ALLOY • SPECIAL PURPOSE STEELS

Canadian Distributor — Railway & Power Engineering Corp., Ltd.

Circle 5A on reply card

"ALL MOTORS ARE NOT ALIKE!"

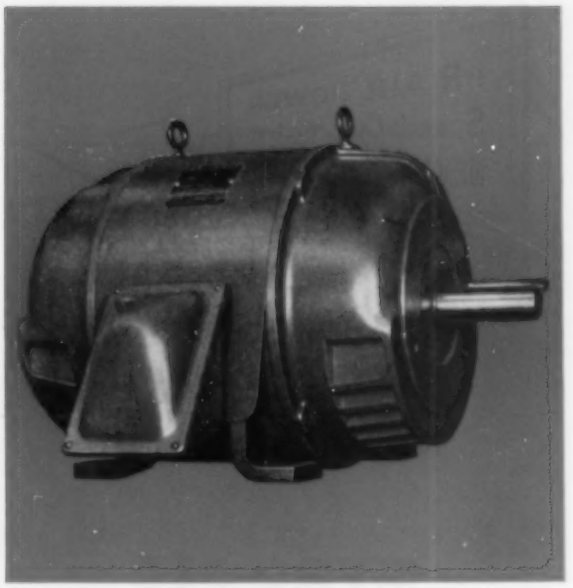

FOR COMPRESSOR SERVICE, Reliance Motors are built better to last longer. These *Precision-Built* Motors have low starting rates... high starting torque... liberal ratings... smooth acceleration... quiet operation. And they have tough, vibration-proof Reli-X insulation. Write for new Bulletin B-2102.

RELIANCE *Precision-Built* **MOTORS**

B-1470-D

RELIANCE ELECTRIC AND ENGINEERING CO.

1118 Ivanhoe Road, Cleveland 10, Ohio • *Sales Representatives in Principal Cities*

Circle 6A on reply card

Savin Construction Corp. blasts ahead with 6,000 CFM of

GYRO-FLO

ROTARY COMPRESSORS

NEW YORK CITY to Buffalo—non stop. That's the fabulous N. Y. Thruway, scheduled for completion in 1954. To speed construction of two sections of this super-speed highway, in the Catskill and Albany areas, the Savin Construction Corporation of East Hartford, Conn. is using ten 600-cfm Gyro-Flo portable compressors.

The compressor engineer on this job likes the Gyro-Flo because, "It's got fewer wearing parts so it's bound to give you less trouble." Truer words were never spoken. Gyro-Flo *rotary* compressors have no pistons, rings, rods, valves or clutches. Output is smoother, steadier and *cooler*—air temperature never exceeds 200°F.

Now available in 125, 210, 315 and 600 cfm sizes, there's a Gyro-Flo portable that's *right* for any construction job. Your nearest Ingersoll-Rand distributor or branch office will be glad to tell you all about it.

One of Savin Construction Corporation's ten Gyro-Flo 600's, supplying two I-R Wagon Drills equipped with air hoists for easy maneuverability over rough ground.

This battery of four Gyro-Flo 600's operated *nine* Wagon Drills — on the Savin project near Catskill, N. Y.

Ingersoll-Rand
11 Broadway, New York 4, N. Y.

CONTRACTORS' COMBINATION

COMPRESSORS
ROCK DRILLS
AIR TOOLS
TURBO BLOWERS
CONDENSERS
CENTRIFUGAL PUMPS
DIESEL AND GAS ENGINES

2-27

Circle 7A on reply card

Air hose with tube and cover of NEOPRENE takes rugged treatment in dam construction

In a few days air hose at a dam site takes a beating equal to a lifetime of ordinary service. The e's no protection from the blazing sun, and jagged rocks tear at the cover as the hose is twisted and yanked from place to place. Inside the hose, hot oil from the compressors attacks the tube. But there *is* a type of air hose that will stand up to this punishment and come back for more. It's hose made with Du Pont neoprene *inside and out*.

The sturdy tube of neoprene won't go to pieces when exposed to hot lubricating oil in the air stream. No particles crumble off to travel along and clog vital tool parts. Neoprene's toughness and flexibility assure long, trouble-free service under the toughest conditions.

The tough cover of neoprene resists abrasion, cutting and chipping throughout its long service life. And neoprene stays smooth and firm despite constant exposure to sunlight, heat and weathering . . . gives the fabric maximum protection.

Many air-hose manufacturers use Du Pont neoprene in their top-quality lines. Your supplier will be glad to show you how hose with tube and cover of neoprene is built for rugged service. Ask him about neoprene the next time you buy.

NEOPRENE

The rubber made by Du Pont since 1932

DU PONT

REG. U. S. PAT. OFF.

BETTER THINGS FOR BETTER LIVING . . . *THROUGH CHEMISTRY*

FREE! THE NEOPRENE NOTEBOOK

Each issue brings you new, unusual applications of neoprene . . . new products . . . interesting articles. Send in this coupon to E. I. du Pont de Nemours & Co. (Inc.), Rubber Chemicals Division CA-8, Wilmington 98, Del.

Name_____ Position_____

Firm_____

Address_____

City_____ State_____

Circle 8A on reply card

GM DIESEL
CASE HISTORY NO. 5312-118

USER: Macco Corporation, Paramount, California.

INSTALLATION: GM Diesel-powered Ingersoll-Rand and Chicago Pneumatic rotary compressors supply air for Guniting riverbanks and earthquake-damaged building walls.

PERFORMANCE: Macco has standardized on GM Diesel-powered rotary compressors. Charles D. Dutro, Superintendent of Guniting Construction, reports steadier air, more positive pressure, gets 25% more work done than with other compressors. No repairs since units were installed more than a year ago.

It pays to STANDARDIZE on
. . . available in more than 750 models of equipment built by over 150 manufacturers

GM
GENERAL MOTORS
DIESEL POWER

"25% more work done" with GM Diesel-powered Rotary Compressors

25% more work done per shift—steadier, more positive pressure—high portability—these are some of the reasons why Macco Corporation has standardized on General Motors Diesel-powered rotary compressors for their Guniting work. They report smoother operation and faster, easier moves.

Quick-acting GM 2-cycle Diesels pack more power in less space, so for building jobs Macco mounts the compressors on light trucks for faster trips. In intermittent compressor operation—and in every other kind of work—precision unit fuel injectors keep fuel consumption down. Contractors tell us that GM Diesels run for years without overhaul, but when parts and service *are* needed they are always quickly available.

More and more contractors are standardizing on modern rotary compressors designed around quick-accelerating GM 2-cycle Diesel engines. For more details on GM Diesel-powered compressors for your job, call your nearest distributor or write:

DETROIT DIESEL ENGINE DIVISION
GENERAL MOTORS • DETROIT 28, MICHIGAN
Single Engines...30 to 300 H.P. Multiple Units...Up to 864 H.P.

ADV. 10

Circle 9A on reply card

Circle 10A on reply card

Wire Rope at Work—This is part of a multimillion-dollar construction job at Norco, Louisiana, not far from New Orleans. When completed for Shell Oil Company, it will be one of the world's most modern refineries.

Wire rope is one of the hardest-working components of the big steel-erection derricks. Because of the tonnages involved, the units are rigged with large-diameter rope, and there is almost three miles of 1⅜-in. Bethlehem Purple Strand on the job. In addition, several thousand feet of 2-in. Purple Strand is employed as guy lines. Here, as in every type of industry where heavy loads are lifted or hauled, the Bethlehem rope is more than equal to the tasks imposed upon it.

Bethlehem Steel Company, Bethlehem, Pa. On the Pacific Coast Bethlehem products are sold by Bethlehem Pacific Coast Steel Corporation. *Export Distributor:* Bethlehem Steel Export Corporation

Mill depots and distributors from coast to coast stock Bethlehem rope for the following industries and numerous others:

CONSTRUCTION • MINING • PETROLEUM • EXCAVATING • QUARRYING • LOGGING • MANUFACTURING

24 ACRES *Cover the World*

. . . with TOP QUALITY

DROP FORGED STEEL

VALVES, FITTINGS and FLANGES

by

Vogt

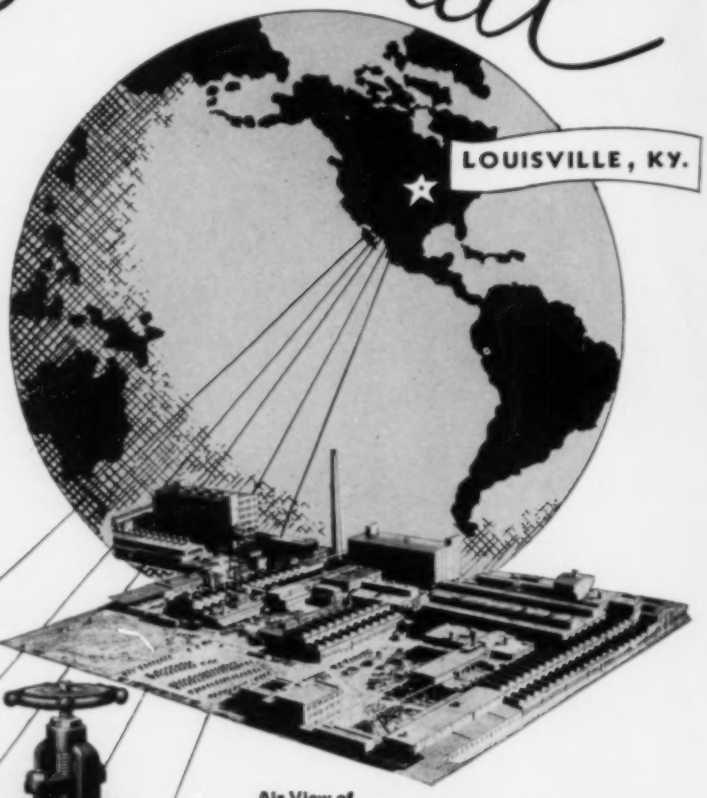

Air View of
Henry Vogt Machine Co.

This 24 acre Vogt plant supplies the most comprehensive line of top quality *drop forged* steel piping materials anywhere available to industry. That's why they're the choice of leading refineries, power plants, chemical plants, etc., the world around!

OUR COMPLETE LINE INCLUDES

Flanged, Screwed and Socket Weld End Globe, Gate and Check Valves • Ells, Tees and Crosses • Couplings • Bushings • Plugs • Unions • Flanges and Flange Unions • Welding Heads

HENRY VOGT MACHINE CO. LOUISVILLE 10, KY.

Branch Offices: New York, Philadelphia, Chicago, Cleveland, St. Louis, Dallas, Charleston, W. Va.

TRI 55 CLAD THE LEADER IN MODERN MOTOR DESIGN

PERMA-NUMBERED LEADS

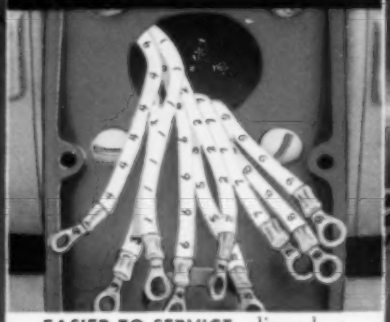

EASIER TO SERVICE, clipped or taped terminals always can be read. You save hooking-up time.

EASY ACCESS CONDUIT BOX

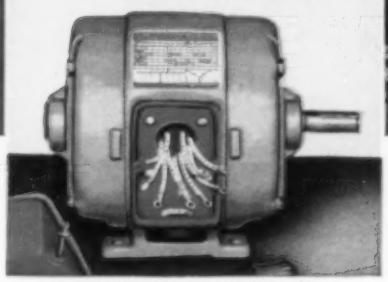

LARGE CONDUIT BOX is diagonally split—gives you ample knuckle room for easier wiring.

60% MORE PROTECTION

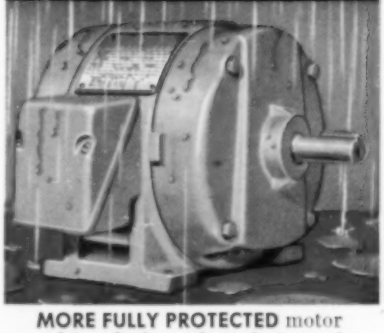

MORE FULLY PROTECTED motor achieved through redesign of cast iron frame and end shields.

LONGER MOTOR LIFE

NEW BEARING SYSTEM means the G-E motor runs longer without relubrication than any other.

Now, easier installation, less maintenance...

G.E.'s new TRI 55 CLAD motor—you can install it and forget it!

REG. U.S. PAT. OFF.

The all-new General Electric Tri/Clad '55' motor is specially engineered to reduce your installation costs . . . and run longer, without attention, than ordinary motors. This new motor gives you 60% more physical protection plus longer electrical life. In addition, a bearing system designed to use the most modern greases means you will not have to regrease the Tri/Clad '55' for years.

You save with the new Tri/Clad '55' because wiring is easier and faster. The large, diagonally split conduit box gives you plenty of knuckle room. Leads are perma-numbered . . . you can always identify them instantly.

The new Tri/Clad '55' also brings you important handling, storing and installing economies. Better use of space within the frame means a 30% reduction in size and weight in some ratings. Yet active materials (magnetic steel and copper) are not sacrificed.

General Electric Tri/Clad '55' motors are now available in many ratings. The complete line of 1 to 30 hp a-c motors will be available soon. For full details contact your G-E Apparatus Sales Office or G-E Motor Supplier today. Write for Tri/Clad '55' bulletins GEA-6013—Dripproof motors, GEA-6012—Enclosed motors, GEA-6027—Gear-motors. General Electric Company, Section 648-7, Schenectady 5, N. Y.

Progress is our most important product

GENERAL ELECTRIC

New Norton Cut-Off Wheels Get Industry's O.K.!

Reports from every section of the country tell how the freer cutting, longer lasting R50 and B9 add the profit-boosting "TOUCH of GOLD"

Here's what they say about–

The R50

143 more cuts
California mine bit manufacturer rates R50 rubber cut-off wheel best ever used. Gave 735 cuts to competitive wheel's 592, for 24% more wheel life.

Better performance
Connecticut machine tool manufacturer says R50 wheel outperformed competitive wheel, cutting freer on wet cutting of high carbon tool steel. (see photo)

120% longer life
Indiana construction equipment manufacturer reports R50 wheel produced 216 cuts, 120% more than competitive wheel's 98 cuts.

No burn or breakage
Kentucky manufacturer of garbage disposal units found R50 wheels eliminated the breakage problem and produced a cut free of burr and burn.

450 more cuts
Missouri manufacturer of coal mining equipment used an R50 wheel to cut 12 bars at 90 cuts per bar, totalling 1080 cuts. Beat best previous wheel's record of 7 bars, 630 cuts, by 70%.

Freer cutting, longer lasting
Massachusetts manufacturer of pneumatic tools reports R50 wheel 25% more durable while producing an equal quality of cut. Freer cutting, with less of usual rubber wheel odor.

25% more cuts
Connecticut machine manufacturer reports R50 wheel produced 25% more cuts than competitive wheels, with equal freeness and cleanness of cut.

The B9

72% more durable
Michigan engine manufacturer says B9 wheel produced 250 cuts over competition's 145, lasting 72% longer.

Lasted three times longer
Ohio metal working company reports B9 gave three times the service life of competitive wheel, with excellent cutting performance.

40% more cuts
Pennsylvania die manufacturer found B9 wheel outproduced competitive wheel by 40% giving 252 cuts as against 180.

36% production increase
Missouri metal company tells how B9 gave 75 cuts to competition's 50-55, proving 36% longer lasting.

Wheel life doubled
New York manufacturer cutting tubing and bars says B9 wheel with F sides lasted twice as long as previous wheel and cut a wide range of metals. (see photo)

150% over competition
Maryland metal working company says B9 wheel gave 125 cuts, topping competitive wheel's 50 cuts by 150%.

42% more cuts
Pennsylvania construction equipment manufacturer averaged 125 cuts with B9 wheel, 42% over competitive wheel's average of 88 cuts.

85% longer life
California forge and pipe foundry reports B9 lasted 85% longer than any other wheel.

27% more durable
Ohio aircraft manufacturer, cutting a wide variety of bar stock, says B9 wheel delivered 27% longer life than competitive wheels.

Performance reports like these are coming in every day, telling how the new Norton R50 and B9 cut-off wheels are setting new records for extra long service life and improved cutting action. Check them carefully, then judge for yourself how much your own cutting-off operations will benefit by these outstanding wheels. And remember: for every cut-off job you do, there's a Norton cut-off wheel that will add the money-saving "Touch of Gold".

See Your Norton Distributor for the cut-off wheels you need. Or write to NORTON COMPANY, Worcester 6, Mass. Distributors in all principal cities, listed under "Grinding Wheels" in your classified phone directory. *Export:* Norton Behr-Manning Overseas Incorporated, Worcester 6, Mass.

The New Norton R50 rubber bonded cut-off wheel is designed especially for wet-cutting of ferrous or non-ferrous bar stock up to 6" diameter. Built-in chip clearance — a great advancement in this type of wheel — is one of its special "Touch of Gold" advantages that assure freer, faster cutting with maximum strength and service life.

The New Norton B9 resinoid bonded cut-off wheel is made with either smooth sides or with the rough "F" sides for more clearance in the cut. It is a high production wheel, cutting free and cool with minimum burning. It will give you long, economical "Touch of Gold" performance in the widest range of ferrous and non-ferrous applications.

W-1570

NORTON

and its **BEHR-MANNING** *division*

NORTON: Abrasives • Grinding Wheels • Grinding Machines • Refractories
BEHR-MANNING: Coated Abrasives • Sharpening Stones • Pressure Sensitive Tapes

Making better products . . . to make other products better

Circle 13A on reply card

ON THE COVER

THROUGH the years Niagara has lost none of its charm and is still rated as one of Nature's greatest shows. Once more or less reserved for honeymooners, it now attracts whole families. Our cover picture shows the American Falls and Rainbow Bridge as seen from Goat Island. Prospect Point, a section of which collapsed on July 28, is in the central part of the picture, where people are viewing the spectacle.

IN THIS ISSUE

OUR leading article is a bizarre tale of a transplanted Spanish monastery which offers further evidence that truth is sometimes stranger than fiction.

•

FOR almost 50 years Philip Brasher has been trying in vain to convince the world that puny bubbles of air can knock down monstrous waves. His novel breakwater scheme has had millions of dollars worth of free publicity but has never repaid its inventor his development costs. Wherever it has been used it has not failed, yet it is still looked upon with skepticism. Its latest successful but temporary application was in England. Page 221.

•

BY THE time these words are read, iron ore will be moving to market from the remote Quebec-Labrador deposits. The 1954 goal is to ship 1½ million tons before winter closes in. The mines are working two 10-hour daily shifts, and the screening plants, 362-mile railroad line to Seven Islands, and the ship-loading plant there are all undergoing tune-up for the years of strenuous service ahead. Page 223.

•

THANKS to continual advances in surgical skill and equipment you are much safer in an operating room than ever before. Compressed air contributes to the working of one of the newest safeguards for patients—an instrument that automatically registers and records blood pressure, pulse and respiration. Page 231.

•

AN ENGLISH reader takes us to task for stating in our May issue that an 8-mile tunnel included in Canada's Bersimis Project is exceeded in length among power tunnels only by the bore at Kemano, in British Columbia. Our article apparently should have limited the comparison to Canadian examples, for our correspondent points out that a 15-mile, 15-foot-diameter bore was driven in 1926 for the British Aluminum Company's Lochaber waterpower scheme.

Compressed Air Magazine

COPYRIGHT 1954 BY COMPRESSED AIR MAGAZINE COMPANY

VOLUME 59 **August, 1954** NUMBER 8

G. W. MORRISON, *Publisher*
C. H. VIVIAN, *Editor* J. W. YOUNG, *Director of Advertising*
ANNA M. HOFFMANN, *Associate Editor* J. J. KATARBA, *Business Mgr.*
J. C. PIERCE, *Assistant Editor* FRANCIS HARTMAN, *Circulation Mgr.*
A. W. LOOMIS, *Assistant Editor* WILLIAM HEINS, *Foreign Circulation Mgr.*
D. Y. MARSHALL, Europe, 243 Upper Thames St., London, E. C. 4.
F. A. McLEAN, Canada, New Birks Building, Montreal, Quebec.

EDITORIAL CONTENTS

Architectural Jigsaw Puzzle—*Jack Bondurant* 216
Strange Case of the Pneumatic Breakwater 221
Iron Ore from Labrador, Part 2—*J.P. Smallwood* 223
Miraculous Bubbles 230
Pneumatic Aid for the Operating Room 231
Special Head Converts Riveter into Pin Driver 233
Editorials—A Word for the Railroads—Underground Energy Scheme 234
This and That 235
Industrial Notes 236
Books and Industrial Literature 240

ADVERTISING CONTENTS

Adams Co., Inc. R.P. 30
Allis-Chalmers Mfg. Co. 34
American Air Filter Co. 32
Armstrong Machine Works 20
Bethlehem Steel Company 11
Continental Motors Corp. 19
Cook Mfg. Co., C. Lee 22
Crucible Steel Co. of America 6
Detroit Diesel Division—General Motors 10
DeZurik Shower Company 16
Dollinger Corporation 3
du Pont de Nemours & Co., E.I. 9
Eimco Corporation, The 5, 33
General Electric Company 13
Hercules Powder Company 31
Hills-McCanna Company 22
Ingersoll-Rand Company ..... 8, 21, 27, 3rd Cover
International Nickel Co., Inc. The 25
Madison-Kipp Corporation 24
M - B Products 20
National Forge & Ordnance Co. 4
Naylor Pipe Company 18
New Jersey Meter Company 22
Nicholson & Co., W. H. 20
Norton Company 14
Reliance Elec. & Eng. Co. 7
Sauerman Bros., Inc. 15
Schrader's Sons, A. 23
SKF Industries, Inc. 17
Texas Company ..... 2nd Cover
Timken Roller Bearing Co. ..... Back Cover
Vogt Machine Co., Henry 12
Walworth Company 26
Westinghouse Electric Corp. 28, 29
Wood's Sons Co., T. B. 20

A monthly publication devoted to the many fields of endeavor in which compressed air serves useful purposes. Founded in 1896.

BPA Member Business Publications Audit of Circulation, Inc.

Published by Compressed Air Magazine Co., G. W. MORRISON, *President;* C. H. VIVIAN, *Vice-President;* A. W. LOOMIS, *Vice-President;* J. W. YOUNG, *Secretary-Treasurer.*
Editorial, advertising, and publication offices, Phillipsburg, N. J.
New York City Office, 11 Broadway. L. H. GEYER, *Representative.*
Annual subscription: U.S., $3.00, foreign, $3.50. Single copies, 35 cents.
COMPRESSED AIR MAGAZINE is on file in many libraries and is indexed in Industrial Arts Index and in Engineering Index.

Reconstructing twelfth-century Spanish monastery becomes world's greatest

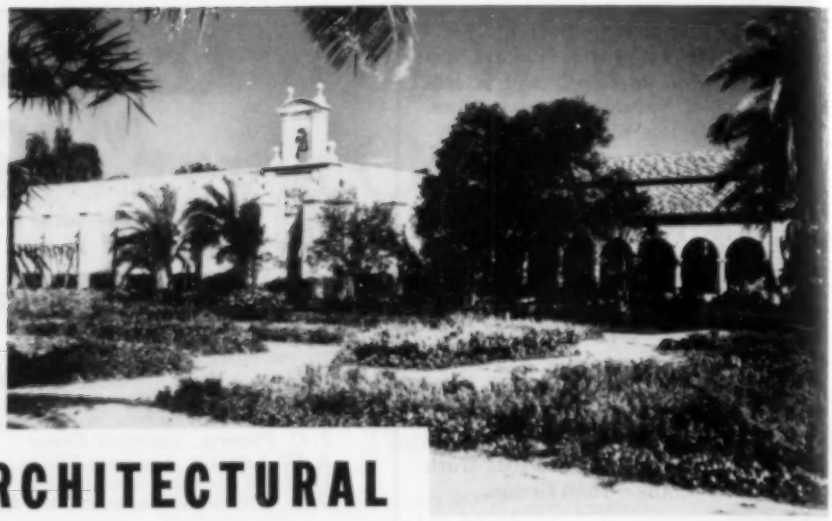

ARCHITECTURAL JIGSAW PUZZLE

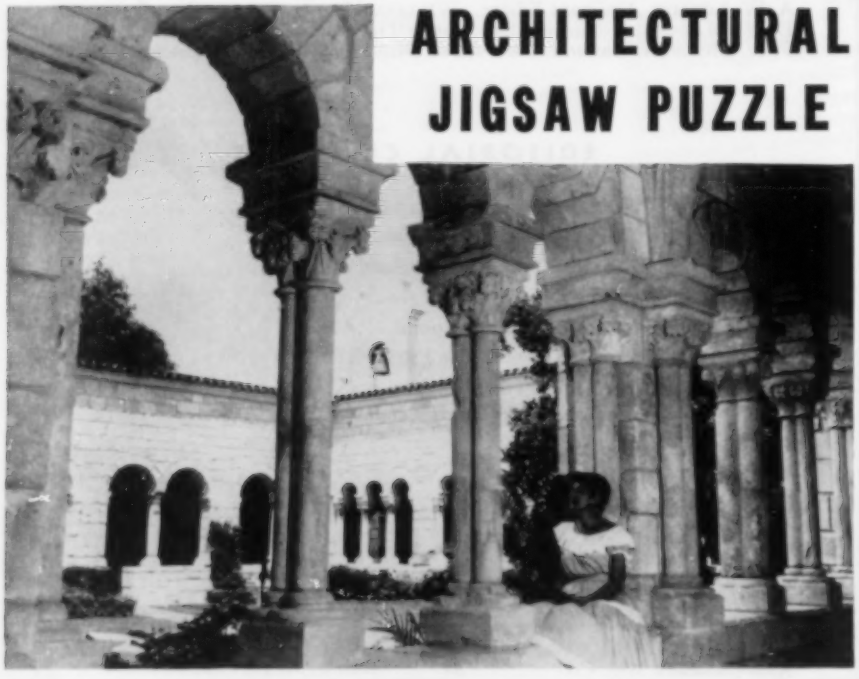

RESTORATION

The reconstructed monastery, top, at North Miami, Fla., is surrounded by formal gardens of the Old World type. They contain more than 10,000 blooming plants and a large collection of rare tropical trees and shrubs. The quadrangular cloister walks, lower picture, have been rebuilt exactly as they were during the centuries when trod by praying monks. The capitals of the columns in the foreground were carved by captive Moors and no two of them are alike.

JACK BONDURANT

JUST north of Miami, Fla., the most fantastic architectural jigsaw puzzle in history finally stands pieced together. It is the actual 813-year-old Monastery of St. Bernard of Sacramenia, assembled, stone by stone, exactly as it was first reared in ancient Spain back in the year 1141.

Completion of the work climaxed a bewildering train of events. The story is a bizarre one of plans that went awry and created a gigantic omelet of stone that had to be unscrambled. It contained more than 35,000 pieces that weighed from 100 pounds to more than a ton each. Sorting them and fitting them together in their original positions required nineteen months of tantalizing toil and cost nearly $1,500,000.

Rich and powerful Alphonso VII, king of old Castile, built the cloister for the ascetic Cistercian monks in a lonely valley near the village of Sacramenia. A prankish fate, aided by the insatiable appetite William Randolph Hearst, the late publishing tycoon, had for great art treasures, turned the job of reërecting the dismantled structure into a gargantuan jigsaw puzzle. Its solution fell to two Cincinnati, Ohio, businessmen, E. Raymond Moss and William S. Edgemon.

The monastery was one of $50 million worth of treasures Hearst collected from the four corners of the earth for his fabulous estate at San Simeon, Calif. His art agent found it in the 1920's in its isolated hiding place, overlooked by the rest of the world. In 1835 it had been confiscated by the Spanish Government along with all other cloisters in the country. The monks and lay brothers who lived there were banished, and the centuries-long existence of the edifice as a monastery ended.

The Spanish Government, less interested in the structure as a historic link with the Middle Ages than as a source of revenue, sold it to a farmer. The latter walled up the graceful columned arches of the cloister walk and stored grain in the enclosed spaces under the Gothic ceilings. The magnificent chapter house became a storage room for farm tools, and the cathedral-like refectory was converted into a stable, a haymow and a shelter for plows and wagons. Other buildings except the church in the little monastic community and the outer wall that surrounded them either fell into ruin or were torn down and the stones used to put up new structures. Only the fact that the cloister walk, the chapter house and the refectory served useful purposes saved them from the same treatment.

That was how Hearst's agent found the monastery. Nevertheless, he recognized it to be not only one of the finest examples of Romanesque and early Gothic architecture in existence but also one of the world's great works of art. For a sum said to have amounted to $500,000 it was bought by Hearst to be taken apart and sent to San Simeon. Architects, who were detailed to draw plans to serve as a guide in reconstructing the building, assigned a key number to each of the thousands of stones and indicated just where it belonged. But here fate played its first trick. So complex, so involved was their system of numbering that it was well-nigh undecipherable when attempts were made to use it 25 years later.

To dismantle the monastery, Hearst's

agent brought stonemasons and carpenters from as far away as Madrid. Masons took it apart stone by stone and painted a number on every one. Carpenters made thousands of crates to pack them in, and each stone was bedded in a nest of hay which appeared to be innocent but was actually the cause of fate's second prank.

As many as 10,751 boxes were needed to crate the structure for shipment to New York, 4000 miles away. But upon their arrival the cases were quarantined; the packing material had been mown in a section of Spain where there was an outbreak of highly contagious hoof-and-mouth disease. Hearst was ordered to open every crate, burn the contaminated hay and replace it with excelsior. This took three years and cost him nearly $75,000. In repacking, mischievous fate played its final trick. Workmen put the stones in whatever boxes were closest at hand, without regard to the corresponding, identifying numbers painted on both stones and crates.

Then the great depression hit. Hearst's monastery, nailed in its many boxes and piled high on three floors of a warehouse in The Bronx, was left to gather dust and storage bills. At one time the fortunes and misfortunes of the venture had been chronicled in columns of type. As the years slipped by, they attracted no more than an occasional and obscure paragraph or two. But one of these items came to the attention of Moss and Edgemon, the two men who were eventually to resurrect the cloister from its limbo of dusty crates.

Long-time partners in the building field and in the development of real

HODGEPODGE OF STONE

It took 23 men six months to open the 10,751 boxes of stone and sort their contents as best they could by size, shape and related numbers. The stones were spread out over ten acres.

SOLVING THE RIDDLE

Expert masons determined by measurement and trial where each stone was to go. A misfit had to be removed and the search continued until the right block was found. The view at the left shows the north cloister walk during reconstruction (see picture next page). Months were required to reassemble the 93 arches of interlocking stone in the chapter house (above). Photographs taken in Spain before the dismantling were of much help in this work.

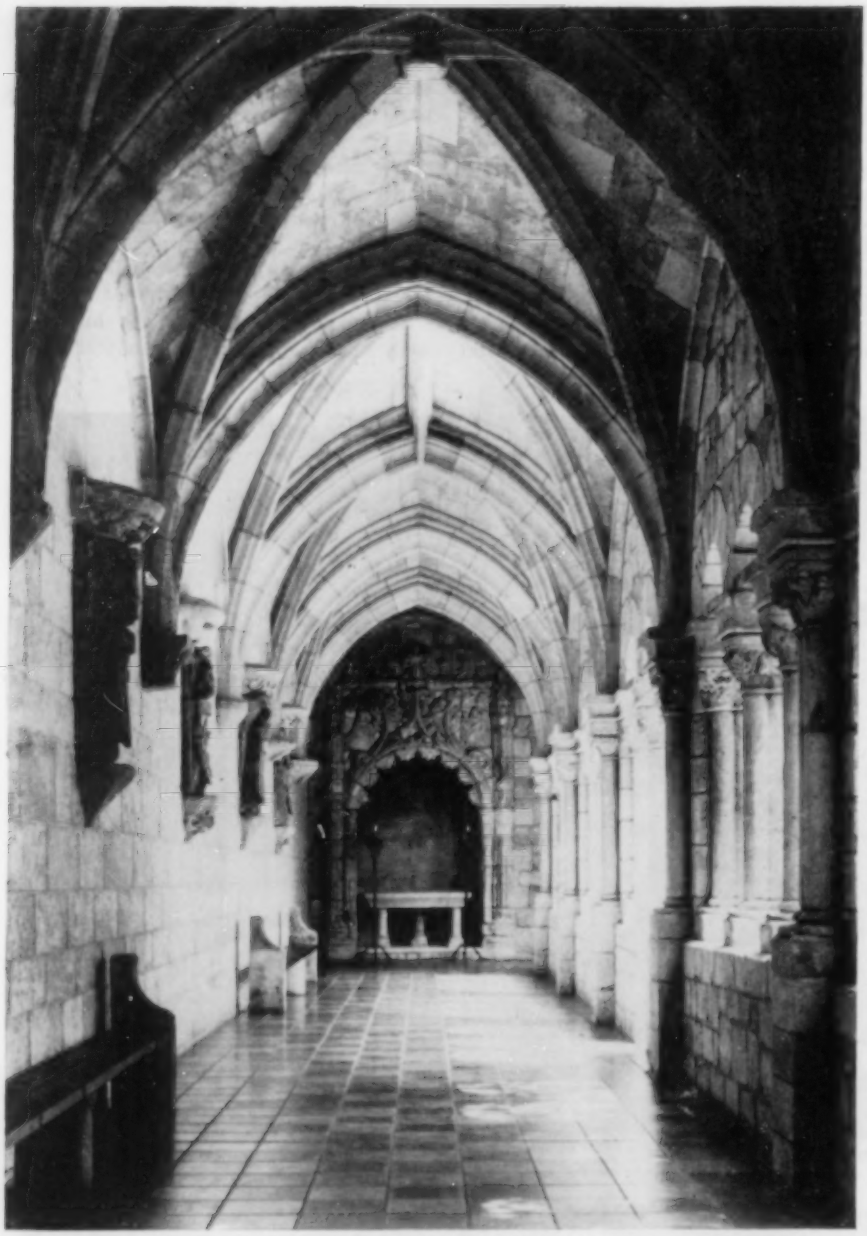

GOTHIC ALTAR FACADE

The facade at the end of the north cloister walk is made up of more than 900 pieces of intricately carved Caen stone. In the left wall are armorial corbels representing noble families of the Middle Ages. They are valued at $12,000 apiece.

estate, they became intrigued with the idea of restoring the monastery to its original state. They attempted to buy it from Hearst. That was ten years ago. The publisher said he would never sell it — as long as he lived. In those last words, Moss and Edgemon believed they read a special significance. In 1951 Hearst died.

Through their New York attorney, Carrol A. Muccia, who was close to the Hearst estate trustees, the partners purchased the cloister. They chartered a freighter and shipped the odd cargo to Port Everglades, Fla. That cost them $60,000. A fleet of trucks shuttled back and forth day and night moving the boxes to the site Moss and Edgemon had selected north of Miami. The new owners assembled a crew of eight of the finest stonemasons they could find for the rebuilding job. They estimated it would take six to eight months and cost between $150,000 and $200,000.

Came the day for work to start and with it the first intimation to the partners that they had a baffling situation on their hands. The complicated reassembly charts could not be understood. A worried conference with their masons and their Florida associate, E. K. Bludworth, who was to supervise operations, led to the decision to check the stones in the crates and the numbers painted on them to see if that would help them solve their dilemma. They opened the first box, the one that was supposed to contain the stones that would be the starting point for the whole assembly. They were not the right ones!

More crates were ripped open, and more and more! But each one only added to the confusion. In the New York episode 25 years earlier the workmen had hopelessly jumbled the original careful packing system. Now Moss and Edgemon realized that with the stones they had acquired a most bewildering riddle.

Twenty-three men toiled three months doing nothing but opening and emptying boxes. They spent the next three months sorting the stones according to size and shape and, insofar as possible, to related key numbers. The stones covered ten acres. By chance, Hearst had had two dozen photographs taken of the monastery in Spain. These pictures showed practically all the details of the separate parts of the building as it stood when he bought it.

With photographs in one hand, complex Spanish plans in the other and an expert knowledge of masonry in their heads, the eight masons and Bludworth began a needle-in-the-haystack hunt for

MONASTERY FOUNDER

Alphonso VII, King of Leon, Castile and Galicia and Holy Roman Emperor of the West who built the Monastery of St. Bernard of Sacramenia. The statue, carved by an unidentified sculptor from a single block of Spanish limestone, is in the niche that it occupied through the centuries.

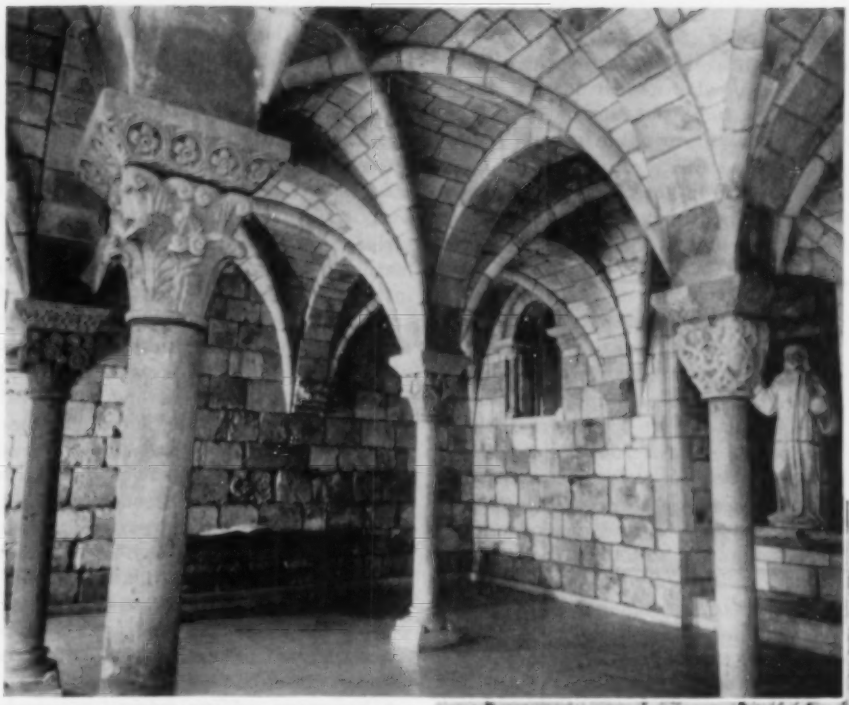

DETAILS OF CHAPTER HOUSE

A marble statue of Christ stands on the altar (left) in the chamber where once the novices were instructed by the abbot of the monastery. The four columns that divide the bays of the vaulted ceiling represent the four cardinal virtues—wisdom, courage, temperance and justice. Against the left wall is a table bearing a fourteenth-century parchment hymnarium (below) that was written and illuminated by hand. It is an item in the collection of medieval art treasures on display in the monastery. In the stone just left of the book is seen a carving that resembles the letter "M" and was put there by the mason who cut and set it originally. Every stone has such an identifying mark, and the number of the different ones found indicates that 94 masons helped to build the cloister.

the right stones. Most of them had to be laid by a method of "dry assembly" to find their exact locations. First they were fitted together loosely on a large concrete platform, checked carefully against the photographs and diagrams and, if they belonged together, moved as a unit to be cemented into their old places.

If a selected stone didn't fit in the dry assembly it had to be lifted out by main strength or mobile derrick, trundled away and the search resumed. Sometimes an unusual shape or a related key number in a series would lead to the sought-after stone in a matter of minutes. Other times hours and even days were spent looking for it.

Week by week, month by month, the slow, tedious work went on. Costs doubled, trebled, quadrupled. But stone by stone, column by column, arch by arch, the old monastery gradually took form: first the cloister walk around the patio, next the chapter house, and finally the big refectory. At last the vexing jigsaw puzzle had been solved!

The stone in the altar facade, built of 900 pieces many intricately carved, differs from that in the remainder of the monastery and has been identified as a well-known limestone from the Caen district in France. Art experts, sculptors and masons who have examined it agree that it dates from the fourteenth century and was obviously not a part of the original structure. A figure carved in a prominent position indicates that the facade was added as a memorial to a priest or abbot.

With that exception, the building material is Spanish limestone. It has withstood weathering through the centuries remarkably well, that in the interior walls naturally showing the least erosion. Surfaces are comparatively rough, no doubt because the stone was worked by hand with rather crude tools. Two decorative plaques that were badly deteriorated were moved from exterior to interior walls to save them from further damage.

Through the years, some of the walls were covered with stucco or hundreds, possibly thousands, of coats of whitewash. This accumulation was to have been chipped away when the abbey was dismantled, but much of it still clung to the stones when they were unpacked. It should be borne in mind that the monastery was continually occupied by monks from the time it was constructed until 1835. They kept it in excellent condition, and evidence of repairs can be seen in several places. The farm family that used the building from 1835 until Mr. Hearst purchased it also apparently took reasonably good care of it.

Nevertheless, reconstruction involved the use of some modern materials. The old roof tiles were in such bad shape that they had to be discarded for new ones. The original floors, composed of rubble, had been compacted by the feet of monks until they were undulating, leaving marks on some of the lower wall stones that are still visible. Because it was impracticable to remove, pack and ship the rubble, new floors of square tiles were laid.

Both to protect the transplanted structure and to conform to Florida's rigid hurricane building code, the exterior of the monastery has been sheathed with modern concrete blocks reinforced with steel. Inside this shell, the building

stands as it was first erected. The cloister walks, which form a quadrangle about 80 feet square, are 12 feet wide under 20-foot ceilings. The refectory is 65x25 feet in size and has a maximum height of 33 feet at the peak of the vaulted arches. The chapter house measures approximately 27x29 feet.

The single bell in the tower is a replacement, but has a history that rivals in interest that of the structure in which it hangs. When Mr. Hearst bought his prize, there was no bell and no record of what had happened to it. When reconstruction got underway, search for an appropriate one was instituted. Word of it reached the owner of a large hotel in the Miami area who is a collector of bells and he let it be known that there was supposed to be one in a Miami junk yard. Investigation verified the report, and the bell was purchased. Subsequently, its background story was pieced together but for some missing links.

The 500-pound bell, which is of bronze tempered with silver, was cast in France in 1773—the date and a crucifix being embossed on the lip. It hung in the tower of a small French church, where it became noted for the clarity and deep vibrance of its tone. In 1805 it was sent as a gift from France to Haiti to mark the first anniversary of that country's independence under the notorious Jean Jacques Dessalines who, before his assassination, was to bathe the island in the blood of massacred white planters and their families.

Dessalines's general-in-chief of the army was the "Black Emperor," Henri Christophe, who named himself king. Christophe built the famous Citadel, a massive and impregnable fortress on top of the highest and most inaccessible peak in Haiti, and either took or was given the bell to hang there. But Christophe killed himself with a silver bullet when his people turned against him for his cruelty. The bell is believed to have been looted from the fortress, but where it was for about 140 years and how it got into the Miami junk yard are still mysteries.

A good barometer of a country's standard of living is its use of oil per capita. In the United States, oil consumption per capita ran over 735 gallons last year. In France, the per capita use was 104 gallons. Income figures run a close parallel, for the average American's income is three times that of a Frenchman.

Now, in a 20-acre tropical garden, the ancient edifice stands again just as it was first built more than 800 years ago by the labor of the great masons of the Middle Ages and chained Moors, captives taken by Alphonso VII in battle. The columned Romanesque arches of the quadrangular cloister walk, where tonsured monks strolled while they murmured endless prayers, enclose the garden bright with flowers.

Flanking the east walk is the chapter house. From an altar opposite the doorway, the same impressive statue of Christ looks down as it did for eight centuries on the stone-walled room where coarse-garbed novices listened to their abbot's priestly instructions and where scribes spent lifetimes copying delicate script onto parchment pages in huge, leather-bound volumes. Overhead, 93 interlocking Gothic arches form a vaulted ceiling of incredible beauty that seems to float in air on hand-chiseled stone ribs.

In the refectory, the towering ceiling rests on six triple-ring stone arches 31 feet high. Each arch is made of 115 perfectly fitting stones having an aggregate weight of 12 tons. It was in the refectory that the monks and lay brothers ate their meals from intricately carved long tables. Now it is a display room for the hundreds of thousands of dollars worth of ancient objects of art Moss and Edgemon have collected.

In the monastery, too, are life-size statues, cut from single blocks of Spanish limestone, of the mighty monarch who built it and of his illustrious grandson, Alphonso VIII, who broke the 5-century hold of the Moorish invaders on Hispania. So faithfully has each stone been restored to its original position, so exactly has each detail been re-created, that today's visitor steps through the old hand-carved entrance and back down the corridors of time. The modern world seems to vanish — the long-dead twelfth century comes alive again.

TRANSPLANTING NEARLY COMPLETED

An aerial view taken last February when final touches were being given the formal gardens and grading was still in progress. In the background is the monastery with the enclosed cloister walk, approximately 80 feet square, at the left; with the chapter-house roof barely visible beyond it; and with the refectory at the right. The over-all length is about 162 feet. The light-colored patch at the upper-left is made up of stones from the structure that once housed the kitchens, which will be put up before the year is out. At the bottom is the administration building composed throughout of modern materials. A charge is made for entering the grounds.

Strange Case of the Pneumatic Breakwater

Fascinating wave leveler nearing 50th anniversary has never "caught on" despite spotless record

THE pneumatic breakwater was recently in the news again. This simple method of calming heavy seas with nothing more formidable than bubbles of air was put to work temporarily at Dover, England, to enable train ferries plying the storm-whipped straits from France to dock without taking a buffeting while the outer gate of the protective, enclosed basin was being given a periodic overhaul. According to all reports, it performed its mission successfully and without incident, thus adding another chapter to a long story of satisfactory service and increasing the wonderment and mystery as to why this fascinating invention has not been utilized more extensively.

The pneumatic breakwater is now nearly half a century old and has never failed to live up to all the claims made for it by its inventor, Philip Brasher. Yet, it has been used only sparingly and intermittently and has been viewed with skepticism almost every time he has endeavored to have it adopted for various marine services. On one occasion some years ago he even offered to put in a $60,000 system to prevent wave erosion at one of the swank New Jersey beach resorts, asking for not one cent of payment unless it did everything he said it would do. Inexplicably, the proposition was rejected.

Efforts made through the years to interest our Navy Department in the device have been unavailing. Apparently the principle on which it is based sounds too simple for it to work. Meanwhile Mr. Brasher hasn't lost any of his confidence in his brainchild despite the fact that he has spent a small fortune in fruitless attempts to promote its use.

The long struggle has not been wholly without its compensations, however. For one thing, Mr. Brasher got a college education as a result of the breakwater scheme. Realizing at the outset that he needed technical knowledge to develop his idea, he worked his way through Princeton University and even found time to play football for four years. He played so well that he was asked later to come back as head coach and he filled that job for several years. In his best season, 1922, the Nassau Tigers not only won the Ivy League championship but also unexpectedly beat the University of Chicago team, which was rated as one of the nation's "powerhouses." In consequence, Mr. Brasher is probably the only possessor of two of Princeton's miniature gold football watch-charm trophies—one a reward for his playing and the other for his coaching.

The breakwater scheme was conceived somewhat by chance. Reared in the East, Mr. Brasher spent six years as a young man punching cows in Colorado and returned to New York in 1900 with nothing but the clothes on his back. He found employment at nearby Brighton Beach, where the Parkway Amusement Company maintained bathhouses for its patrons. In an effort to control or prevent erosion of the waterfront property by wave action, the owners of the business built a $125,000 jetty extending 400 feet out from the shore. Three months later a storm tore out $40,000 worth of it in three hours.

That started young Brasher to thinking that there must be some better method of combating the force of the sea. To get a good base to build on, he began studying wave action. He learned that a comber exerts its major damaging effect as it is curling to break. At that instant it is undergoing a change from mere oscillation of its component particles to sustained horizontal travel. When it breaks, the momentum of tons and tons of water, moving laterally and then falling from whatever the crest height may be, is practically irresistible and will in time beat down just about anything rigid that man can put in in its path.

"I visualized the problem as similar to that of stopping a ball carrier in a football game," Mr. Brasher explained recently. "You can do it by getting in his way, but a far better and easier method is to grab him by an ankle and upset him. I decided that there must be some way of getting at a wave's ankle and set out to find it."

Advancing waves extend far below the surface and there they have only lateral movement. They break when they encounter a shoal or run up on a shallow beach—in other words, when something takes the feet out from under them. Young Brasher reasoned that a vertical force was needed to lessen the combers' horizontal drive, and out of a clear sky conceived the notion of creating it by simply stringing perforated pipes along the sea bottom and releasing air that would bubble through the water to the surface. If the scheme worked, he knew that he could flatten out waves whenever he chose and curb their power before they could wreak havoc.

Finding himself unable to work out the theory involved, Mr. Brasher enrolled in Princeton. Upon learning why he was there, the dean of engineering became more enthusiastic about the breakwater idea than his pupil. He had tanks set up and even contrived to obtain the use of the university's swimming pool for the experiments. Miniature waves were artificially created, and it was demonstrated that an air screen would actually lower their intensity. However, after numerous unsuccessful attempts to devise a formula for determining how much air would be needed to trip combers of varying sizes, it was decided that the information could be gained only by tests with real waves.

British Transport Commission Photo

IN ACTION AT DOVER, ENGLAND

Air rising from submerged piping at the entrance to the ferry slip produced the "slick" shown, which is similar to that caused by spreading oil. This installation recently served successfully for four months while repairs were being made to the outer of the two gates of the enclosed docking basin that protects boats at pierside from wave action.

Mr. Brasher had no chance to conduct such tests until after he had been graduated and got a job with the Morse Dry Dock & Repair Company in New York Harbor. There he strung a perforated pipe line along the bottom of the bay and at odd times was able to use the compressed-air distribution system for making his observations. He learned a lot about what diameter of pipe would best serve his purpose, what size and spacing of air outlet holes would be most efficient, and how sticky mud could block the openings.

In 1908, during an exhibition of machine tools on the Million Dollar Pier in Atlantic City, N.J., he got permission to hook onto the air lines. He ran piping to the end of the pier, where he dropped 100 feet of perforated 3-inch tubing. This setup was operated for about three weeks. Later in the same year he arranged to conduct some experiments at Crotch Island, Maine, where a quarry located close to the shore had an air-compressor plant with a capacity of 8000 cfm. In none of these cases was there anything that had to be protected, and the equipment and the physical conditions had to be taken as they were.

In the midst of the Maine tests, Mr. Brasher received a call for help from John Arbuckle, then the nation's leading coffee packer, who had undertaken to refloat the U.S. Cruiser *Yankee* which was hung up on Hen and Chickens Reef in Buzzards Bay, Mass. The vessel had three compressors aboard, and Brasher's job was to protect the foundered ship from the pounding waves until it could be freed from the rocks. He succeeded in subduing 20-foot combers that had been breaking over the craft's deck, which would have been about 12 feet above the surface in a calm sea.

The cruiser was liberated but, unfortunately, sank twelve hours later from damage it had sustained on the reef, so the Brasher Breakwater didn't get much credit or favorable publicity for the work it had done. Mr. Brasher was on the vessel when it went down at 4 A.M. and was lucky to survive. He lost everything he had with him, including photographs he had taken to show the calming effect of his air screen.

Since then the system has been successfully applied about thirty times in various parts of the world, but never on a permanent basis. Its longest trial was on the Pacific Coast where it served to protect an oil company's loading pier that was originally 4100 feet long but had been reduced to 2100 feet by storm action. That installation, which was made without Mr. Brasher's knowledge or consent, was used intermittently and apparently worked satisfactorily for ten years or so. It was discontinued when the inventor brought suit for infringement of patents.

Another of the many disappointments

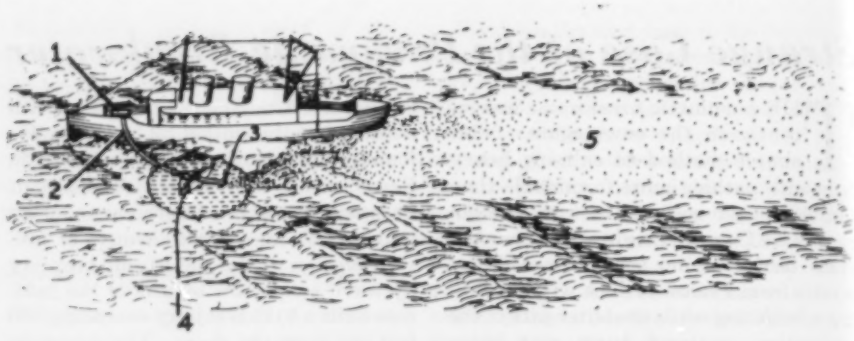

HOW SEAS COULD BE CALMED FOR PLANES

The sketch illustrates how the compressed-air breakwater could be applied to provide a "runway" for seaplanes. It was patented by Philip Brasher during World War II. Air from a compressor, 1, aboard the ship is conveyed through a hose, 2, and discharged 75 to 100 feet underwater at 3. A paravane, 4, keeps the hose submerged and at the desired distance away from the boat. The escaping air would, the inventor claims, create a quiescent area, 5, that could be used by seaplanes to take off and land with safety. This scheme would permit small vessels not equipped with catapults to carry a plane or two, which would be lowered onto or lifted out of the water by a crane. Mr. Brasher contends that a ship moving at a rate of 15 miles per hour could produce a calm stretch of sea from ½ to ¾ mile long and of substantial width. The latter could be increased by using more than one air hose, or air lines could be extended from both sides of the boat.

the breakwater has brought its originator was a futile trip to South Africa in 1924 at the invitation of Premier Jan Christiaan Smuts who thought the wave-calming device could be used to advantage in the harbor at Port Elizabeth. Upon arriving at Capetown with his wife after a long sea voyage, Mr. Brasher found that General Smuts had been suddenly displaced by James B. Hertzog.

The idea of fragile bubbles smashing angry seas appeals to the imagination, and the system has received reams of publicity through the years. The inventor's archives contain articles in 22 languages, including the Japanese. A description of the scheme that appeared in our own magazine in 1921 has been the most sought after single article we have ever published, and requests for it are still occasionally received.

Around 1930 the Russians began to display interest in the breakwater and they are known to have experimented with it a lot and may have even put it into regular service. A year or two ago a leading American weekly magazine credited the Reds with having conceived the idea. Mr. Brasher patented his invention in the United States in 1907 and subsequently in several other countries. He is not covered in England, however, and the installation at the Dover ferry slip previously mentioned was put in by a British firm, Pneumatic Breakwaters, Ltd., the head of which, A.H. Laurie, holds a British patent on the method.

At Dover, where the harbor waters swirl around in great confusion during heavy weather, four parallel air lines, 96 feet long, were laid across the dock entrance in about 40 feet of water. As it was not the intention to use the system for a long time, the piping consisted of available superheater fire tubes from a locomotive. It was 4⅞ inches in diameter and welded into 24-foot lengths flanged for convenient assembly at the site. Holes ⅛ inch in diameter were spaced 3½ inches apart. Air was supplied through a header and manifold by a compressor driven by a French-made kerosene-burning gas turbine. The unit was capable of delivering from 500 to 1800 cfm at 50 psi, this range being accomplished by varying the turbine speed from 26,000 to 35,000 rpm.

The installation worked successfully and without incident during the four months it was in service and was removed when the outer dock gate was restored to duty. The air was turned on 26 times for varying periods, and waves up to 4 feet high outside the breakwater were reduced to 9 inches by the time they reached the inner gate. Pressure was maintained at about 5 pounds above hydrostatic pressure, or about 17 psi.

The best results were reportedly obtained by providing around 20 cfm of air per yard of pipe, or a total of 640 cfm, which is a little higher than the volume Mr. Brasher has usually found it necessary to use, although the quantity depends on the height of the waves. Not more than one of the four pipes laid was required at any time (Mr. Brasher has never specified more than one in any of his installations).

Thus the bubble breakwater has chalked up another effective performance and again upheld the faith of its originator. Whether or not he lives to see it, Mr. Brasher is confident that his plan will some day be widely and regularly applied for such purposes as protecting vulnerable coastal areas from erosion, creating "safe harbors" for ships in trouble at sea, permitting all sorts of marine construction and salvage work to proceed without interruption from the weather, and calming rough water everywhere for the smooth landing and take-off of seaplanes.

IRON ORE FROM LABRADOR

Shipments from fabulous Ungava deposits began the first of August

J. P. SMALLWOOD

CONSTRUCTING MENIHEK DAM

To provide a supply of hydroelectric power for the mines and townsite, Menihek Dam, begun in 1952, was erected 30 miles southwest of Knob Lake with an initial installation of two 6000-hp turbines and space for two more. The concrete dam, pillars for which are shown at the top, is flanked on both sides of the stream by earth dikes and provides a head of about 35 feet. Tracks for the railroad into the mining area are laid on the crest of the structure. Cement and much of the other material required for the dam were flown in. The lower picture shows some of it awaiting transport at an airstrip at Mile 134 along the railway. Included, at the middle right, are two Canadian Ingersoll-Rand 315-cfm air compressors with their wheels removed to facilitate loading.

PART TWO

FOR the first few miles out of Seven Islands the terrain is flat and sandy. Then, suddenly, one climbs a mountain and is in rough country. So rough, in fact, as far as Mile 16 that ties and rails had to be laid individually instead of in 39-foot prefabricated sections, a practice which, with the help of other factors like the air lift, made it possible beyond that point to advance at a rate of as much as 2 miles a day. This exceeded the daily pace of 1.3 miles necessary to maintain schedule and to wipe out the seemingly disastrous effects of some bottlenecks that were encountered during the first stages of construction.

One of these slowdowns was below Mile 12 where a 2250-foot tunnel (35,000 cubic yards) had to be excavated and where a dynamite blast collapsed the roof causing the mountain to come down through the hole. Another was just past the tunnel at the turbulent Moisie River where a spring flood washed out a pile trestle and a new start had to be made in bridging the stream.

Today, all this trouble is a thing of the past, for the Moisie is traversed by a single-track structure of continuous truss construction supported by two intermediate bents. It is made up of three main spans 135 feet, 247½ feet and 202½ feet long, respectively, with three 40-foot deck-plate girder spans at the north end. This land of rivers required the building of some seventeen bridges between the Moisie River and Knob Lake. They are mostly of steel and from 40 to 160 feet in length.

With the crossing of the Moisie behind them, the builders faced 5 miles of rugged terrain with deep rock gulleys overlain in spots from Mile 10 to Mile 30 with sticky blue clay. These canyon-like valleys persisted until Elevation 2050 was reached about 150 miles north of Seven Islands. Beyond that point the country is comparatively flat.

Most of the area underlain by iron ore has a characteristic corrugated pattern resulting from alternating northwest-trending ridges 600 to 1000 feet above the level of the surrounding land and numerous linear lakes of varying sizes which are the topographical ex-

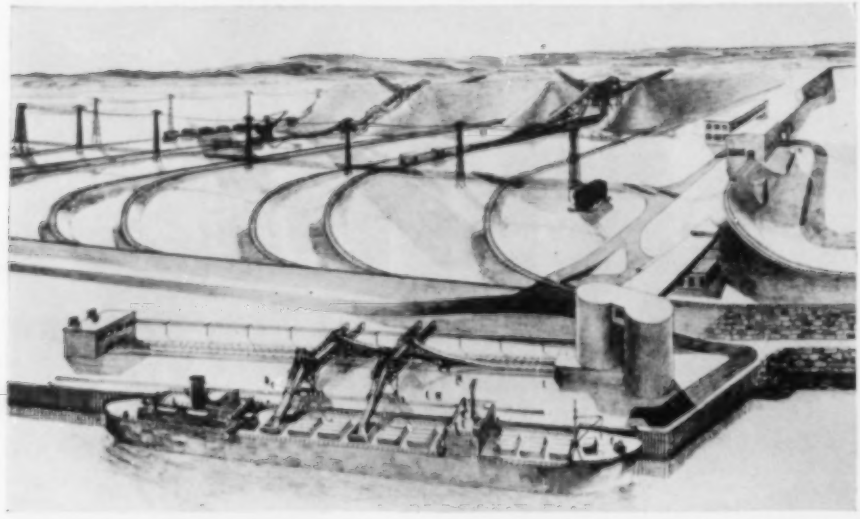

ORE-HANDLING FACILITIES AT SEVEN ISLANDS

Weather conditions will normally limit mining to 5½ months, from about May 15 to October 30, and at the start seven trains a day will carry approximately 70,000 long tons (2240 pounds) of ore, or well over 10 million tons during the season. Ships will transport the material from the railroad terminal at Seven Islands during nine months of the year, from about March 1 to late November. In order that they may operate for a longer period than the mines, some ore will have to be stockpiled. Shown here is an artist's representation of the general layout of the plant that will handle it. Ore dumped from cars in the building at the upper right will drop into one of two 360-ton hoppers feeding a conveyor that will deliver it to either a freighter or a stock pile. If shipbound, it will go into one of the 1000-ton bins just beyond the right end of the vessel and out through a bottom opening onto a conveyor, the purpose of this being to help mix ore of different grades. The latter conveyors will feed two shiploaders that will move transversely on rails spaced 70 feet apart so as to reach any of a vessel's hatches. Ore to be stockpiled (upper part of picture) will be transported underground to a mobile stacker that will elevate it and discharge it on either side. Only one of the two loaders shown will be installed at present. Ore from a stock pile will be transferred by an 8-yard electric shovel to cars and then dumped and delivered aboard ship as described. These facilities will have a maximum shiploading capacity of 8000 tons per hour but normally will load at a rate of 6000 tons into freighters and 3000 tons onto stock piles.

pression of folded and faulted strata. The vegetation is predominantly evergreens with occasional patches of birch, but the higher hills are bare except for caribou moss found throughout the subarctic. Towards the north the trees gradually become smaller and the hardwoods disappear. However, sufficient timber is available for local building needs and firewood.

By normal standards, the climate is severe but not too much so for those who are prepared for it. Winter temperatures occasionally reach minus 50°F but often climb to above freezing. The prevailing high winds are extremely annoying and definitely an obstacle to outdoor work and flying schedules. Nevertheless, climatic conditions are not such as to prevent the operation of open-pit mines for five to six months of the year.

Despite the fact that the land flattened out, construction of the railroad northward beyond Mile 150 was no cinch. The biggest headache was muskeg—spongy decomposed moss with an average depth of 5 feet. More than once it has swallowed up equipment, and because its rotting action prevents freezing, tractors must plow snow into it to make winter roads. Much ingenuity was displayed in building the railway. Dynamite charges had to be placed in such a way that muskeg would be blasted aside, permitting gravel fill which had been dumped on top of it to settle on bedrock. Although equipment, materials and supplies for the operation were brought in by air lift and by the line itself as rails extended northward, more than 200 miles of service and access roads were constructed parallel to the right of way.

Engineers kept the job on schedule despite the many difficulties. One innovation enabled them to save considerable time. They avoided switching rail-carrying flat cars by using only the car trucks with the rails themselves constituting the longitudinal joiner. These trucks could readily move over newly laid, lightly ballasted track and had the added advantage of being easily handled by the rail cranes.

Another wrinkle that made for rail-laying progress had to do with ballast-

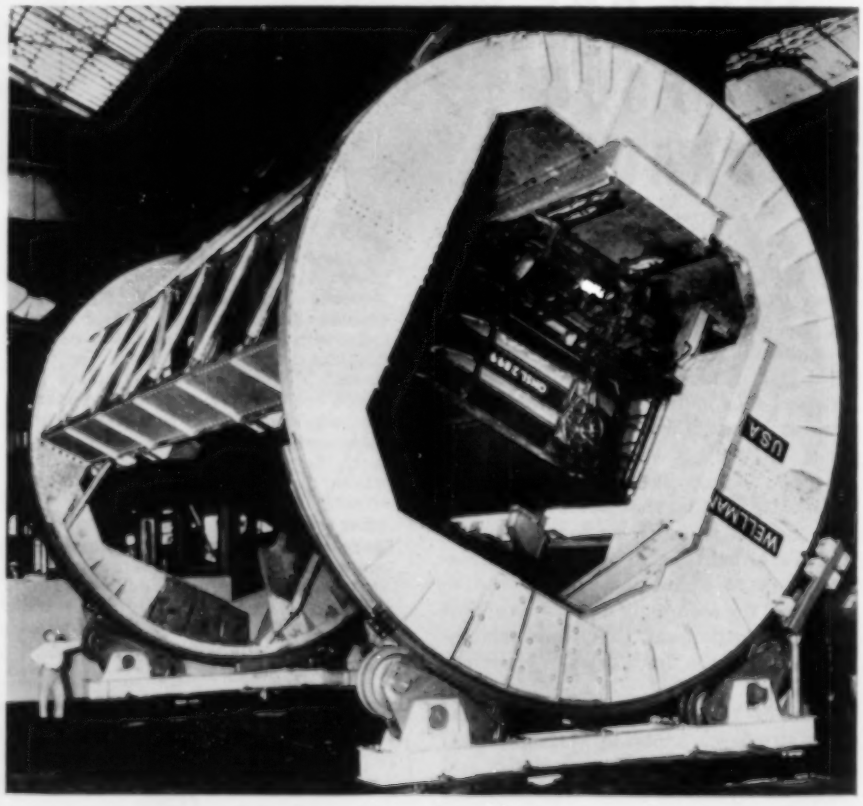

CAR DUMPER

Cars of ore arriving at Seven Islands will be dumped by a Wellman rotary mechanism like that shown. Two units will be arranged end to end and may be operated separately or together. As a car enters a dumper its speed will be accelerated to push out the empty ahead of it. Then it will be stopped in position for unloading by an air-actuated retarder controlled by the dumper operator. Air will be fed to it from a 260-cfm compressor through hoses long enough to allow for the rotation of the unit.

SEVEN ISLANDS STRUCTURES

Completely equipped shops for taking care of the railroad's 49 diesel-electric locomotives will be housed in the arched structure illustrated below. The other picture shows some of the ore-handling facilities under construction. At the right are the two mixing bins to which the ore will be routed before being loaded aboard ships.

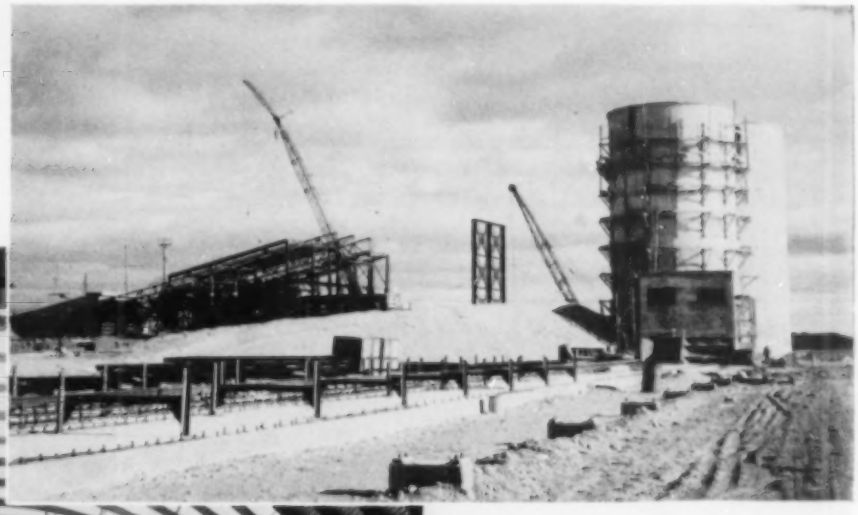

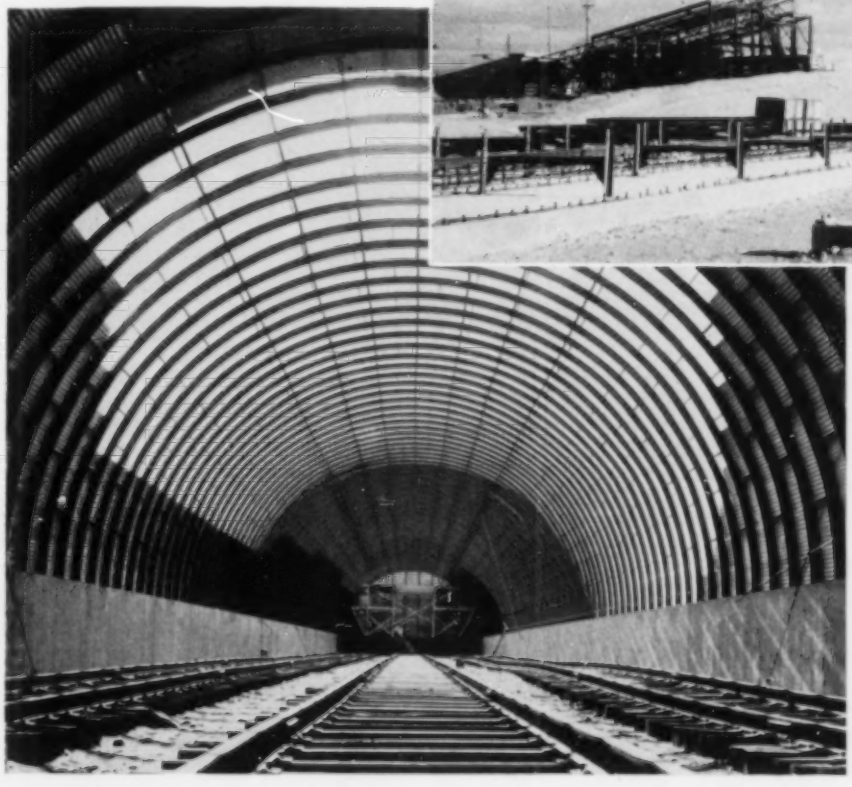

ing. After ballast is dumped on the roadbed, rails must normally be lifted in stages to tamp the rock under the ties with hydraulic jacks or pneumatic tampers. On certain sections of the Labrador Railway, however, a specially designed sled of wedgelike construction is pulled along under the rails by a locomotive and raises them for that purpose.

The northern terminal at the mine at Knob Lake will be a common yard for receiving empty trains and dispatching loaded ones made up of 100-115 cars —9000 to 10,350 trailing tons—hauled by four locomotives totaling 6000 hp. Operations will involve the transfer of empties to loading chutes at the screening plant and the return of full cars to the main yard for assembling into trains.

At the southern or Seven Islands end of the line the marshaling facilities—550 acres of more than 40 miles of track —will consist of a receiving yard, classification yard, stock-pile yard, car-repair yard, locomotive servicing shops and a departure yard. When an ore train arrives at the receiving point, it will be directed by signals and remote-control switches, and when part way in the yard the caboose will be detached and run by gravity to the departure yard. From there it will again be shifted by gravity to the rear of a train bound northward for Knob Lake.

From the receiving yard the loaded train will be "humped" into the classification yard where the ores are to be graded. As each car passes over the hump, it will be weighed automatically by an electronic scale and checked from an inspection pit. If found defective, it will be branded by moving a lever. After classification, the cars will be hustled by between-track side-pusher engines to a tandem dumper that will turn two cars upside down at one time. The ore will go to crushers and from there by conveyor belts either to ships or stock piles. Empties will travel by gravity from the dumper to assigned tracks in the departure yard, an operator in a tower controlling their speed with retarders.

Another important job was the construction of two hydroelectric stations. One of these on the Marguerite River at a point 15 miles west of Seven Islands can supply 23,000 kw for the rail yards and ore-handling facilities and for the greatly expanded town of Seven Islands. This joint project of IOCO and the Gulf Pulp & Paper Company features a 610-foot diversion tunnel and a 517-foot concrete dam 128 feet high with a mile-long earth section.

Ten thousand kilowatts of energy for the mine workings and the community at the north end of the line will be supplied by the Menihek powerhouse on the Ashuanipi River 30 miles southwest of Knob Lake. Designed by a firm of consultants, the Montreal Engineering Company, its 12,000-foot dam, which will also serve as a railway bridge, consists of a series of concrete piers with a low earth embankment on each side and of a 300-foot gated, concrete spillway to take care of run-off during periods of high water. Construction equipment was hauled overland from the nearest air strip in tractor-drawn convoys on 6 feet of snow, and the job also presented something of a problem in river diversion. The dam and generating plant

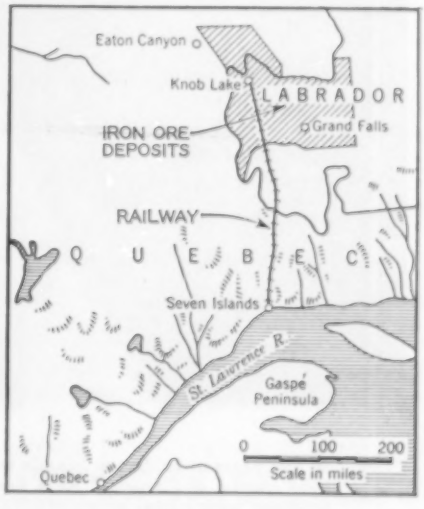

REGIONAL MAP

The first trainloads of iron ore have already rumbled down to the St. Lawrence. Millions of tons will follow in the years to come.

CANADA'S FUTURE DULUTH

In five years or so, Seven Islands will become the ore-shipping capital of Canada. As a first step in that direction wharves, with a total length of 1600 feet, are being built in the natural deep-water harbor. The settlement was three centuries old last year, but as a quiet fishing and forestry village it never had more than 1400 inhabitants. Now the iron boom has swelled the population to 4000, and it is expected to reach 6000 to 7000 by 1956 and eventually 12,000 to 15,000 when ore shipments amount to 20 million tons a year—the present objective. To transport the influx of workmen over the sprawling area the number of taxicabs has jumped from 2 to 60. The mushrooming town, with an administrative budget that never exceeded $7000 a year, is facing the problem of raising $900,000 to provide adequate sewerage and water systems and $450,000 for paving streets and building schools. It has no rail or highway connections with "the outside," but 150 miles of roads extending upriver toward Murray Bay have been contracted for.

POWER FOR TUNNEL DRIVING

A 2250-foot tunnel was driven at Mile 12 to carry the railroad through a rocky height bordering the Moisie River. Blastholes were drilled from a truck-mounted carriage with operating air supplied by the three Canadian Ingersoll-Rand 500-cfm portable compressors pictured. From the northern portal of the tunnel the line emerges onto the longest bridge in the system.

ROLLER-BEARING CAR

Each of the 2000 ore cars of the Quebec, North Shore & Labrador Railway will have sixteen Timken roller bearings and a husky man will be able to move one of them.

are completed and machinery is now being installed. Power will be available this year.

The Marguerite and the Menihek plants will meet IOCO's initial requirements, but two other excellent hydroelectric sites are available for future development. One of these, at Eaton Falls on the Kaniapiskau River and 70 miles north of Knob Lake, offers 500,000 hp. Grand Falls, on the Hamilton River to the east, can furnish 1,250,000 hp. The great potential of the area can be appreciated from the fact that the Hamilton River watershed alone could provide an estimated 10 million horsepower, which would make it the largest hydroelectric development in the world.

When the IOCO project was started, the fishing wharf at Seven Islands was too small to handle the increasing number of supply boats. The contractors therefore went to work in a hurry on a temporary timber-and-concrete dock and at the same time put plans on drawing boards for the extensive facilities that will be needed to handle 20 million tons of ore a year, as contemplated.

The C. D. Howe Company Limited of Montreal was named consultant for the job, with D. H. Sharpe as project engineer. The permanent site selected for the pier is at Point aux Basque, just east of Seven Islands, which offers ocean-going carriers the most favorable deep, safe anchorage in a harbor free from ice for at least nine months of the year. So that as many as three vessels could tie up at once, a 1600-foot stretch of dock was specified and positioned so that the necessary 37-foot draft could be readily maintained. The plans also called for 6000 feet of tunnel and gallery for conveyor belts to move the ore from the dumper house to storage or to ships waiting at the pier.

Two wing-type gantries at the stock piles will build the ore mountain high until it is needed for shipment. On the wharf are two gantry-type loaders with a combined capacity of 8000 tons per hour, which means that a large ore carrier can be loaded in about five hours. The entire system is geared to handle 70,000 tons daily.

Built over deep sand underlain by clay, nearly all the structures of the ore-handling plant are supported on piles. The work of sinking them was speeded up by the use of compressed air, which operated the pile hammers and the utility hoists with which they were provided to pick up the piles prior to driving. The air was supplied by Canadian Ingersoll-Rand 500-cfm portable compressors and was also used to power pneumatic grinders and chippers that served to smooth beads on welded sections of sheet piling. Fill for the dock came from two quarries and was handled by clamshell buckets. Chunks that were too big for the purpose were pop-holed with Jackhamers. Wherever timbering was needed on the job, air-operated woodborers made short work of drilling bolt holes for the connectors.

C. E. MCMANUS

As assistant general manager in charge of mining, he has the task of starting and keeping the ore flowing from the pits and is also concerned with building the town for the mining force.

JOHN A. LITTLE

Experienced in both railroading and mining, he was given the job of overseeing construction of the railroad and transmission lines and looking after warehousing and stores at Seven Islands.

DR. A. E. MOSS

Now chief geologist for IOCO, he was assistant to Dr. J. A. Retty when the latter directed the first detailed geological examination of the remote area where the ore deposits are located.

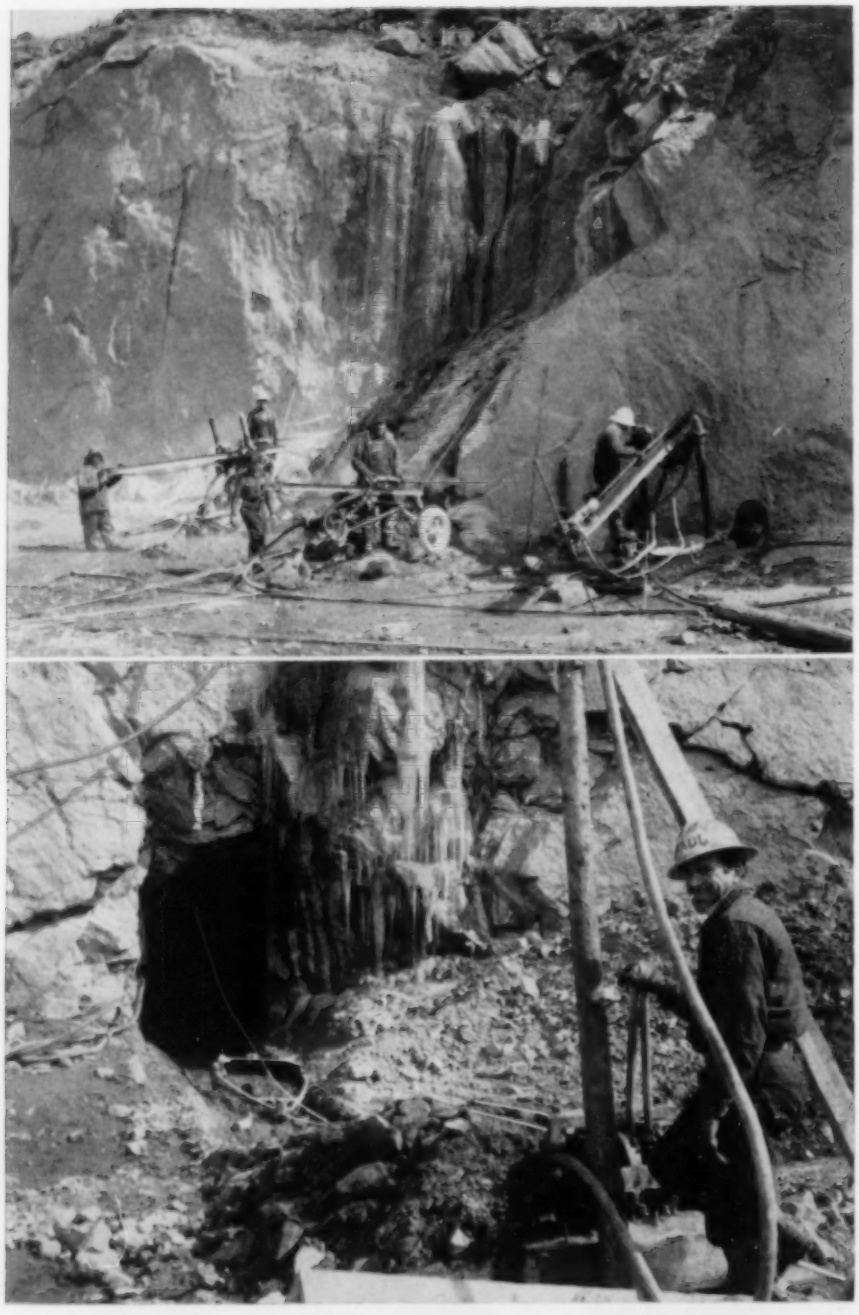

QUARRYING BALLAST

One source of ballast for the railroad was a quarry at Mile 16. At the top, Canadian I-R Wagonjack drills are attacking the rock face. The other picture shows a "coyote" hole which was later loaded with powder to blast down a large quantity of rock. In the foreground is a small I-R air hoist furnishing power for the removal of muck with the scraper in front of the portal.

With 500 million proven tons of high-grade ore to be sent to market, IOCO's manager of mines, C. E. McManus, has had a big job planning the workings beyond the Knob Lake terminus. Limited shipments during 1954 (1-1.5 million tons) while the railroad bed settles will give him a chance to put operations into high gear for a productive 1955. The mine requires a great variety of heavy machinery and handling equipment, most of which must function the year round at temperatures ranging from an average daily minimum of minus 23°F in January—the coldest month—to an average maximum of 69° in July. Because ore in transit will freeze in the cars at low temperatures, rail transportation will be limited to 5½ months per annum and enough must be produced and hauled in that period to keep Seven Islands busy during its 9-month season. Therefore, the plan is to stock-pile 2,000,000 tons at the port each year.

Getting the ore into the cars involves excavation at the pits; transportation from the pits to the screening plant; screening and crushing; and loading. Ruth Lake No. 3 Pit has been partially stripped of overburden and the screening plant for this deposit is nearing completion. The pit will be about ½ mile long and 800 feet wide and will eventually be worked to a depth of 350 feet. Two other pits are expected to be opened during 1955. Underground mining is not contemplated in the immediate future, but exploration indicates that it may be feasible at a considerably later date. Preparation of the pits is not difficult because the ore, for the time being, is lightly covered and will be reached well above the level of the water table.

Initial stripping is being done by three diesel-powered 2½-yard revolving quarry shovels. Once this preliminary operation is completed, four Marion 6-yard electric shovels will take over. These units, each with a working weight of 416,000 pounds including 50,000 pounds of ballast, will scoop up approximately 12 tons of iron ore with each stroke of the boom. Rail spurs will not enter the pits. For the tough job of taking a 12-ton shock load of ore from the shovels and hauling it away for screening or stock-piling, a primary fleet of twelve rear-dump Euclid diesel trucks has been selected. Each weighs 66 tons and has a capacity of 23 cubic yards or 34 tons of ore. They are the largest in service in Canada.

The trucks will roll into the screening-plant bay and dump their loads through an opening 14 feet square into a steel hopper equipped with air gates. From the hopper the material will be discharged through an opening about 5 feet across and 12 feet long onto a 5-foot-wide primary apron feeder of the roller-track type. This unit has a capacity of 1920 tons per hour and will deliver the ore to a 6x12-foot single-surface screen with a circular throw action. Anything larger than 5 inches will be tossed onto a secondary apron feeder, while smaller pieces will fall through a large screen hopper onto a third apron feeder connecting with the final conveying system in the screening plant.

Oversize material on the secondary apron feeder that is acceptable so far as the rock content is concerned will go to a crusher delivery chute, while that with too high a rock content will be diverted to a hopper by reversing the feeder and will eventually be trucked to a waste pile. Ore not exceeding 24 inches in size will be reduced to a maximum diameter of approximately 4 inches at a rate as high as 275-300 tons an hour by a 42x48-inch, 176,000-pound Traylor jaw crusher resting on a reinforced-concrete foundation. The crushed material will flow through a chute onto a 36-inch conveyor that will take it at a speed of 610 feet per minute to

the building housing the loading pocket. This carrier will handle hourly up to 1600 tons of ore weighing 125-150 pounds per cubic foot. All this equipment—apron feeders, screen, crusher and conveyors—will be controlled by an operator from his cabin in the loading bay. The loading pocket is 14 feet 2 inches wide, 29 feet 2 inches long, and 21 feet deep. It has a capacity of 360 tons and will discharge through four duplex gates which, acting singly or at the same time, will fill a car without having to move it.

At Knob Lake, renamed Schefferville after the Bishop of Labrador, is being built what will be the most northerly community in the Province of Quebec. It is scheduled for completion this year and will consist of a general warehouse, bunkhouse, cookhouse, ten staff houses, more than 75 private homes and a school for the mining and development workers and their families.

In the first installment of this article it was mentioned that steel authorities in the United States had estimated as late as 1945 that their mills would not require iron ore from Canada for 50 to 75 years. But subsequent developments such as the Korean War and the cold war now make it clear that up to 40 million tons a year will be needed from foreign sources. For security reasons it is obviously preferable that the bulk of it should come from Canada rather than from South America or from across the Atlantic.

With that in mind the IOCO project was designed for expansion to 20 million tons a year.* There is a fly in the security ointment, however, because most of that tonnage, for lack of adequate deep water to ports on the Great Lakes, would have to take an unguarded route to seaports such as Baltimore and Morrisville on the east coast of the United States. Therefore, an inland shipping lane is imperative not only in the event of war but, for economic reasons, also if peace should prevail. As early as 1952 the U. S. Materials Policy Commission endorsed the deepening of the St. Lawrence River to 27 feet on the basis of the expensive boat and rail haul to Pittsburgh and Chicago. The fact of the matter is that the output of IOCO holdings cannot be appreciably increased economically without the St. Lawrence Seaway.

Under the present setup, ore going to Cleveland, Youngstown and other inland United States ports will have to be transferred at Montreal to smaller carriers that can pass through the existing 14-foot locks along the St. Lawrence between Montreal and Lake Erie. This route is heavily burdened and, it is estimated, could probably not take more than 1,500,000 tons of Ungava ore annually. Nevertheless IOCO is going ahead with transhipment facilities at Contrecoeur near Montreal.

The importance of the St. Lawrence Seaway has been well summed up by the prominent international steel specialist and businessman, Sir James Dunn, who said that until it is dug North America will remain "woefully derelict" in her duty to all people. "Without the freest entry to the Great Lakes waterways of the iron ore of the Quebec-Labrador country, our raw material picture is not complete."

Iron Ore Company of Canada went into production officially on July 31, when Premiers Maurice Duplessis of Quebec and Joseph R. Smallwood of Newfoundland joined in ceremonies marking the loading of the first boat with ore at Seven Islands. The 19,000-ton cargo, carried by the converted C-4 freighter *Hawaiian*, was consigned to Philadelphia, Pa., where August 5, the day of its arrival, was celebrated as Quebec-Labrador Day.

DRILLING SCENES

Wooden plugs mark the locations of holes already drilled (top view) as two wagon-mounted Canadian I-R Jackhamers continue their attack on the outcropping rock at Mile 201 on the railroad right of way. The lower picture shows drillers in a wintry setting at the site of Marguerite Dam.

*So huge an output would require a second dumper and some yard additions, but the main rail line would need little if any alteration. Twenty-two sidings along the right of way for sidetracking provide for a schedule of 36 trains a day, an increase of twenty-two over the number estimated for the shipment of 10 million tons of ore a year.

Miraculous Bubbles

Gurgling globules cushioned rock blast at Niagara and saved a million dollars

MYRIADS of bubbles of ordinary air rising through water do some extraordinary things. On the prosaic side is their service to wild life. Injected beneath ice caps on fast-frozen ponds they supply life-giving oxygen to fish. Introduced into lakes before freezing takes place they maintain open water all winter for migratory geese and ducks.

In the field of industry, the evanescent bubbles achieve more spectacular results. For many winters they have protected hydroelectric dams against damage from pressing masses of ice and kept intakes to turbines open regardless of plummeting thermometers. Similarly, lumbermen learned in recent years to utilize them in order to prevent log ponds at sawmills from freezing over during cold weather.

Older than either of these applications is the idea of the Brasher compressed-air breakwater for calming raging seas, which is described elsewhere in this issue. The outstanding feature of all these operations is their utter simplicity. They require no more than some perforated piping fed with compressed air.

Up in Canada a new and equally amazing way of putting the tiny bubbles to work is credited with having saved a million dollars at its first trial. Creating a compressible curtain in the water of the forebay of the huge Adam Beck No. 1 generating station, the globules absorbed the shock of blasting out a 12,000-cubic-yard plug of rock with 6 tons of explosives, leaving the upper portion of the powerhouse, only 85 yards away, unscathed.

The scene of this remarkable demonstration is the point where two great streams of water, taken out of the Niagara River 6 miles upstream from the falls, converge to form a pond or forebay that feeds water to either of the two adjacent Adam Beck power plants—Nos. 1 and 2—of the Hydro Electric Power Commission of Ontario. The 500,000-hp No. 1 station has been in operation for 34 years and is served by its own waterway. No. 2 station, which will eventually house spinning turbines rated at 1,828,000 hp, is now nearing completion. A separate conduit, consisting of a tunnel underneath the city of Niagara Falls, Canada, and an open canal elsewhere, was built to supply it with water. When the forebay for No. 2 plant was excavated, a rock wedge was left between it and the adjacent pool servicing No. 1 station. In order that the powerhouse might receive water from either system, the engineers had to join the two forebays by removing the rock barrier.

Because water is noncompressible and would transmit the shock of the blast directly to the superstructure of No. 1 plant, the obvious procedure would have been to close down the generators, drain No. 1 forebay and blast out the obstruction "in the dry." That would have entailed buying power at an estimated cost of one million dollars.

However, Adolph LaPrairie, an explosives expert for Canadian Industries Limited who served in an advisory capacity in determining the blasting technique, was familiar with some of the remarkable accomplishments of air bubbles. Why not, he thought, build an "air cushion" in the forebay of No. 1 powerhouse to dissipate the waves of concussion set up by the detonation? If the scheme worked, the entire 25,000-odd-ton rock plug could be shattered with one blast and there would be no need to shut down the station.

LaPrairie's idea appealed to the Ontario Hydro engineers enough to try it out on a miniature scale. At the commission's laboratories in Toronto, R.C. Jacobsen, a physicist, and A.T. Edwards, an engineer, rigged up a tank of water bisected by three perforated air pipes on the bottom. Sensitive pressure gauges were set up at one end of the tank and C-I-L blasting caps were detonated at the other.

The first test showed them that they were on the right track, but that adjustments were needed. For two months they experimented, varying the volume of the air released and the diameter and spacing of the holes in the pipe to determine what size and quantity of bubbles would be most effective.

From the information gained they laid out, full scale, the piping necessary to produce the desired dampening effect. Three 3-inch lines, each perforated with 36 holes per foot, were clamped together 9 inches apart. They were closed at one end, and a 6-inch air-supply pipe was manifolded to the other ends. The assembly was then lowered to the forebay floor, crossing it on a line parallel to the face of the rock plug and the powerhouse but farther away from the latter.

Vertical blastholes that had been drilled in advance in the rock barrier were then loaded with "Nitrone," an explosive that was selected because it is not highly sensitive to propagation and comes in water-excluding steel containers.

To be on the safe side, the headworks of the generating station were protected with bags of sand, but this precaution proved to have been unnecessary. The air cushion, composed of millions of compressible bubbles, absorbed the concussion so well that the hammering effect transmitted through the water to instruments at the building wall was only 1/70 as intense as it would have been without the shock absorber. It was not strong enough to be damaging and, far below, the turbines kept on spinning the generators without a break.

Based on the calculations made by the engineers during their experiments, the desired cushion of bubbles was obtained by forcing 90-psi compressed air into the piping system at a rate of 3750 cfm. The upward rush of the churning air raised the surface of the water about 4 feet above the normal level. The installation cost amounted to around $2000.

Following this initial success, the same scheme was used down in the Niagara gorge to soften a blast that removed a similar ledge of rock from between the stream and the tailrace excavation for the new plant. This second air curtain was 750 feet long. Canadian Industries Limited has applied for a patent on the technique and believes that it can be applied to advantage wherever underwater blasting has to be done in the proximity of harbor structures, bridge piers and the like.

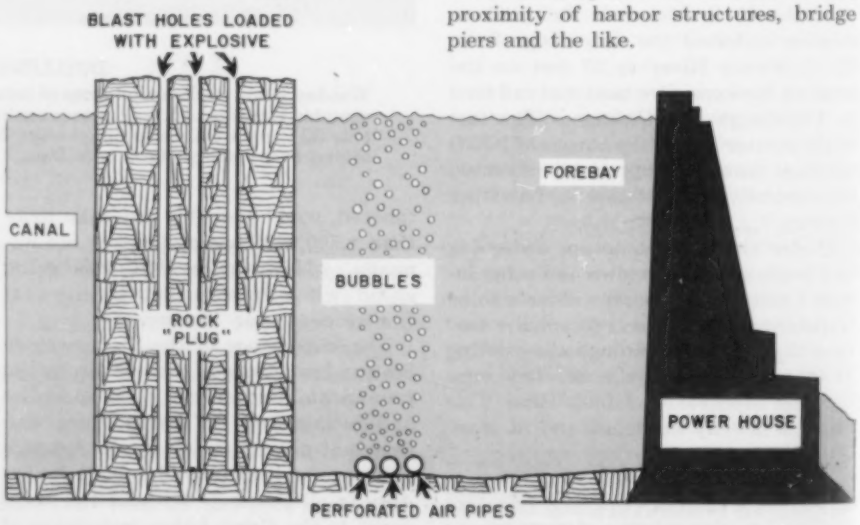

CROSS SECTION OF THE NIAGARA AIR CURTAIN

Pneumatic Aid for the Operating Room

Physiological monitor automatically checks and records condition of hospital surgical patients

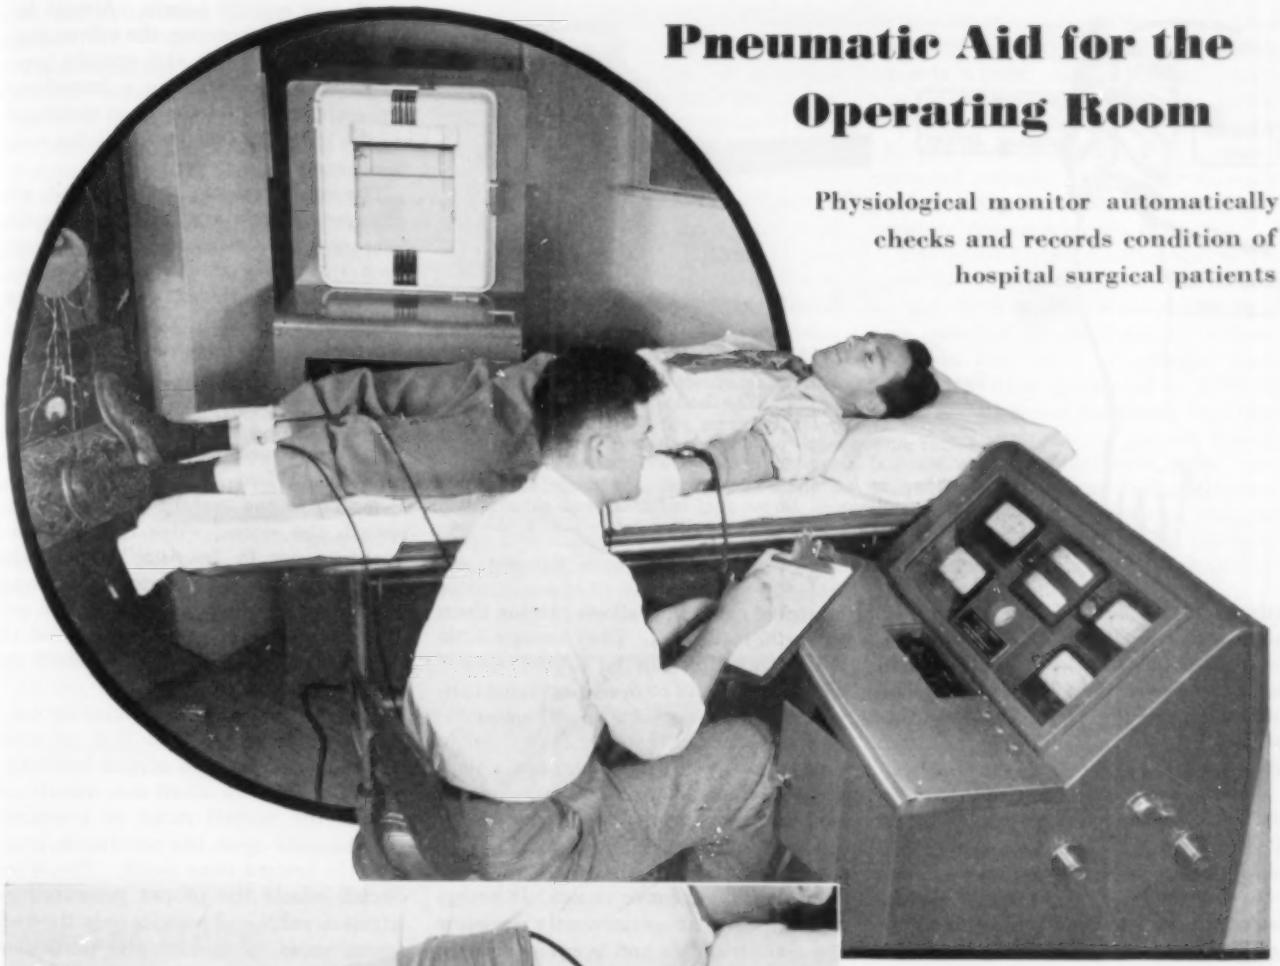

LABORATORY TEST

The operating-room console, in the right foreground above, indicates changes in blood pressure, heart beat and respiration as they take place. A permanent record of these readings is made automatically on the chart of the recorder console in the background. Electrical attachments on the patient's arms and legs permit continuous measurement of pulse rate and pulse irregularity. The arm band and associate microphone are for taking blood pressure. In actual use, the recorder console is placed outside of the operating room.

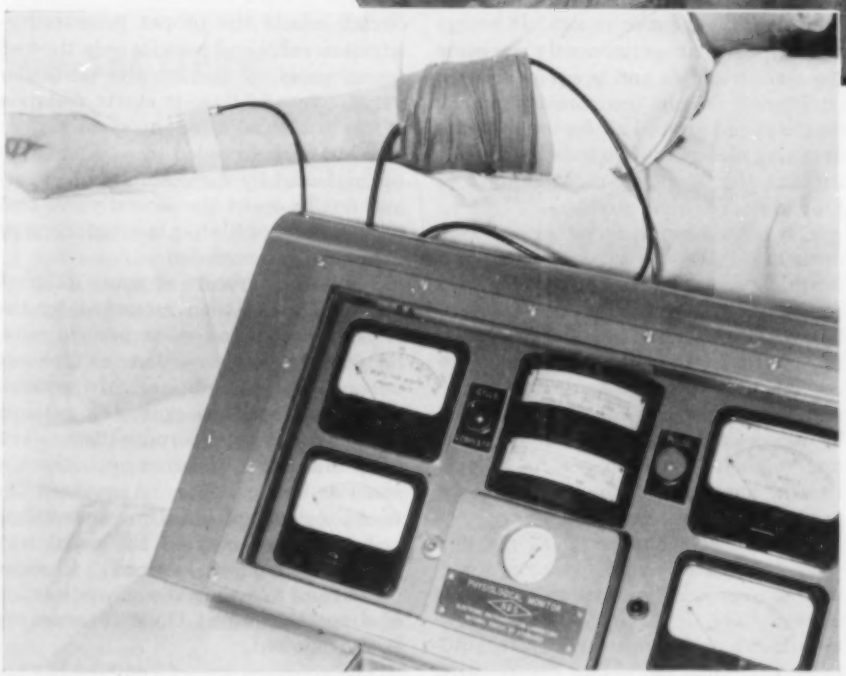

CLOSE-UP OF PANEL BOARD AND ARM ATTACHMENTS

One of the electrodes for measuring heart beat is attached to the wrist while the inflatable band for taking blood pressure is applied to the upper arm. The two dials at the left indicate pulse rate (above) and arrhythmia, or pulse irregularity (below). The two topmost dials in the central column show systolic and diastolic blood pressure. Just above the nameplate is an aneroid barometer that registers the pressure in the hollow arm band and is used in checking the calibration of the blood-pressure indicator. The two dials at the right record respiration rate (above) and respiration volume per minute (below). An indicator light marked "cycle complete" (left upper-center) glows when measuring blood pressure. Below it is a neon lamp that is of aid in adjusting the gain control of the blood-pressure recorder. A light marked "pulse" (right upper-center) is used in establishing the proper lead and gain setting for the individual subject when measuring heart beat. A pilot light below it shows when power is on.

AN ELECTRONIC and pneumatic instrument that automatically detects changes in the physiological condition of a patient under anesthesia throughout the course of an operation has been developed by the National Bureau of Standards. Known as the NBS physiological monitor, it measures changes in blood pressure, heart beat and respiration as they take place and not only presents the information on a panel for interpretation by the surgeon or anesthesiologist but also records it in permanent form. The pneumatic feature of the apparatus is involved with the taking of blood pressure.

The instrument is expected to prove of great value in the prevention and control of emergencies that may unexpectedly confront a surgeon at the oper-

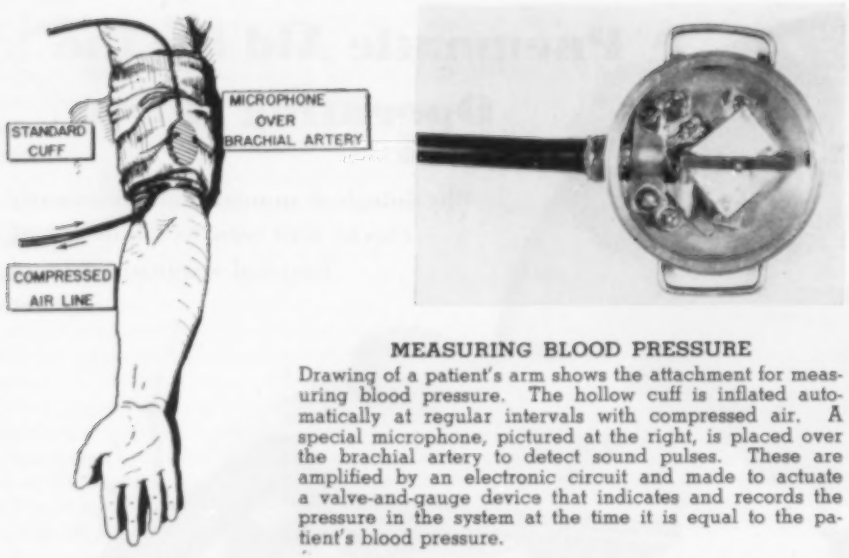

MEASURING BLOOD PRESSURE

Drawing of a patient's arm shows the attachment for measuring blood pressure. The hollow cuff is inflated automatically at regular intervals with compressed air. A special microphone, pictured at the right, is placed over the brachial artery to detect sound pulses. These are amplified by an electronic circuit and made to actuate a valve-and-gauge device that indicates and records the pressure in the system at the time it is equal to the patient's blood pressure.

ating table or during critical postoperative periods. It will most likely also be of assistance in medical research such as in studies of the effects of drugs on blood pressure that require a knowledge of the behavior of physiological variables over long periods.

During surgery it is vital that the patient's condition be known at all times. That is why the anesthesiologist ordinarily measures blood pressure and pulse rate frequently. If necessary he administers drugs, additional anesthetics, or infusions of blood or plasma. However, when he is occupied with other duties, periods between measurements may be prolonged. Normally, this delay is not serious, but it can have unfortunate consequences. For example, when complete circulatory collapse occurs, as in severe blood loss or heart failure, some time may elapse before the condition becomes outwardly apparent. Because time is important in applying remedial aid, the earliest detection of such a crisis offers the best hope of saving the patient's life.

The physiological monitor makes prompt emergency action possible by continually displaying the needful information in simple, numerical form. Data on systolic and diastolic blood pressure (associated, respectively, with the heart's contraction and expansion), pulse rate and irregularity, breathing rate and quantity of air exhaled per minute are available at a glance without intermediate calculation or manipulation. Preliminary adjustments require no special technical skill or training on the part of the operator. Safeguards are provided that permit the instrument's use in the presence of highly combustible anesthetic gases such as are usually found in an operating room.

The monitor consists of two metal cabinets—an operating room console and a recorder console—interconnected by a combination compressed-air line and electrical cable that allows placing them up to 20 feet apart. They occupy little floor space and can be moved around without effort. The operating-room cabinet shows the results of all measurements as fast as they are taken and in easily read form. It contains the controls, and is linked with all attachments such as arm band and electrodes on the patient. The recorder console is located outside of the operating room where there are no explosive vapors. It houses a recorder that permanently registers the measurements and is equipped with additional circuit components and a source of compressed air for use not only in taking blood pressure but also in pressurizing the operating-room cabinet to keep out explosive mixtures.

The new automatic system of measuring blood pressure is based on the same technique practiced by an examining physician. He forces air into a hollow band or cuff wound around the upper arm until the systolic pressure is exceeded. Then he gradually lowers the pressure and determines systolic and diastolic pressures by noting the reading on a manometer when certain characteristic pulse sounds in the artery are detected with a stethoscope.

With the automatic method, a microphone is located at the point of observation over the brachial artery (chief artery of the upper arm). Every three minutes an air-supply valve opens automatically, thus increasing the pressure in the arm band. As soon as it exceeds the diastolic pressure, the microphone begins to pick up sound from the artery. When this sound reaches its maximum it begins to decrease, ceasing after the pressure in the cuff is higher than the systolic pressure.

By means of amplifiers and relays, the pulses picked up by the microphone actuate two solenoid valves which open to connect the air system with the proper pressure-indicating gauges at the diastolic and systolic points. Almost immediately after opening, the valves close so that the diastolic and systolic pressures—now converted by a transducer into electrical signals—remain registered on the indicating meters until the next measurement cycle begins.

The amplifier and relay circuit are arranged in such a way that when the microphone receives the initial sound from the artery the first valve opens, permitting the adjacent gauge to record the diastolic pressure. Because the point at which sound stops cannot be determined until that point has been passed, the pressure is carried beyond the systolic pressure and then allowed to decrease slowly until that pressure is again reached. When the first pulse corresponding to the systolic pressure is received, the second valve opens, allowing its gauge to "capture" and retain the instantaneous pressure. The band is then rapidly deflated so that the period during which pressure is applied to the patient's arm may be as short as possible.

The entire procedure is under the control of a program switch that initiates the measurement at 3-minute intervals. Actually, it takes about one minute or less in the normal range of pressures but depends upon the maximum pressure the system must reach. The relay circuit selects the proper pressure-registration valve and permits only the first sound pulse to operate the particular valve. In addition, it starts deflation of the arm band after the systolic pressure has been exceeded by a safe margin (as indicated by the cessation of sound) and finally opens the second valve that rapidly deflates it after the systolic pressure has been recorded.

The blood pressure of many different individuals has been measured by the physiological monitor for periods ranging from an hour to as long as 21 hours under hospital conditions. In general, it does not seem to cause the patients any discomfort and permits them to eat, sleep and carry on other activities the same as bed patients. Agreement between instrument blood-pressure values and those obtained in the usual way has been found to be good. Changes in pressure following the administration of drugs that affect blood pressure are easily followed.

The common use of combustible anesthetic-gas mixtures makes it necessary to furnish safeguards against potential explosive hazards. Electrical equipment of the type required in the operating-room console contains voltage sources, contactors, motors and numerous hot filaments, all of which could ignite the gas under certain conditions. Equally dangerous are possible accumulations of static on the surfaces of the equipment, as well as accidental connection of the instrument housing or any of its parts

with the power line through insulation failure.

To prevent the accumulation of electrostatic charges, the operating-room console is mounted on conductive rubber casters grounded to the metal frame. However, the use of explosionproof fixtures, as in fixed electrical installations for power-line equipment, was not considered feasible for a portable unit of this type. Instead, it was decided to maintain low positive pressure within the cabinet. This made it unnecessary to seal it hermetically, but reasonable care was taken to minimize leakage by restricting the size of openings. Thus, for example, the instrument panel is covered with a sheet of safety glass and sealed to the instrument case by a rubber gasket and compression frame.

Housed in the recorder console is a sliding-vane compressor that supplies the air that keeps the operating-room console under about ½-pound pressure above atmospheric. Before it is delivered to the cabinet, the air is cooled by passing it through a heat exchanger. Noise is eliminated by an acoustic filter located at the inlet side of the compressor. Safeguards are provided that prevent any power from reaching the unit in the operating room until the purging pressure is at work. In fact, a time delay makes certain that current cannot be applied until the purging system has functioned for about two minutes.

The device used to measure blood pressure also has a safety feature that protects the arm of the patient against excessive pressure or, what is worse, long periods of pressure that would obstruct the flow of blood. It is a mechanical pop-off valve that opens and relieves arm-band pressure when the system pressure is higher than the preset value. In addition, the cuff is deflated by the aid of an adjustable electric limit switch whenever the system pressure exceeds a point reasonably well above the patient's systolic pressure. In the event of power failure, the air is discharged from the system by a solenoid-operated exhaust valve that normally performs this function after every blood-pressure determination.

The physiological monitor was developed by S. R. Gilford and H. P. Broida of the NBS staff. Financial support was provided by the Veterans' Administration and by a program of basic instrumentation sponsored at NBS by the Office of Naval Research, the Office of Air Research and the Atomic Energy Commission. Preliminary trials were carried out in medical wards at Mount Alto Veterans' Administration Hospital in Washington, D. C., and in the operating room of George Washington University.

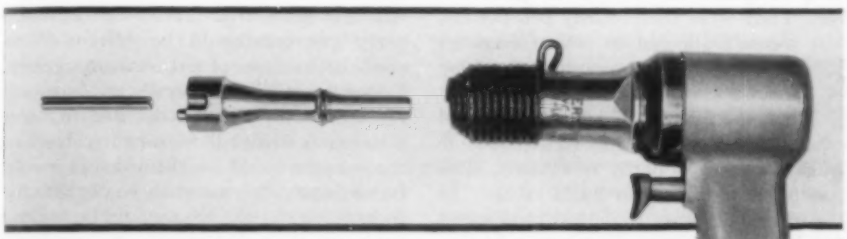

EFFECTIVE ADAPTATION

The two pictures show the air hammer, the driving set and the Rollpin fastener before and after assembly. The tool is an Ingersoll-Rand pistol-grip Type AVC-11, one of four sizes used for this work. It has an over-all length of about 9½ inches and is operated with air at 90 psi line pressure. The slot and two openings in the special driving head for the insertion of the pin are plainly visible in the view below.

Special Head Converts Riveter into Pin Driver

TO FILL the gap between hand-tool and machine applications and to give the manufacturer a more complete range of assembly methods from which to make a choice, Elastic Stop Nut Corporation of America, in coöperation with Ingersoll-Rand Company, has developed a power-tool attachment for driving its Rollpin fastener. The latter is a tubular split pin slightly larger in diameter than the hole into which it goes. It serves in place of solid, serrated and taper pins; as a dowel, axle or key; and as a hinge or clevis pin. When being forced home, the fastener contracts; when in position, expansion holds it tight against the hole wall.

The tool itself is the standard I-R pneumatic riveting hammer widely used in the aircraft industry. It is light in weight and provided with a safety-type coil-spring retainer in which the special driving head is inserted. The latter has a slot machined in one side to take the Rollpin, an arrangement that permits the operator to hold the fastener without getting his fingers between it and the tool, as an accompanying picture shows. After it has been driven partway it may be shifted either to an opening in the face of the head or in a stud projecting from it, depending upon whether the pin is to protrude, to be hammered flush with the surface or countersunk.

One of the characteristics of the AVC Type riveter that makes it suitable for this work is its sensitive throttle control that enables the operator to vary its performance with the job. As a result, he can start driving a Rollpin at low speed and with light blows and then hammer it home under full power, which is determined by the size and diameter of the fastener, the materials being assembled and other factors.

EDITORIALS

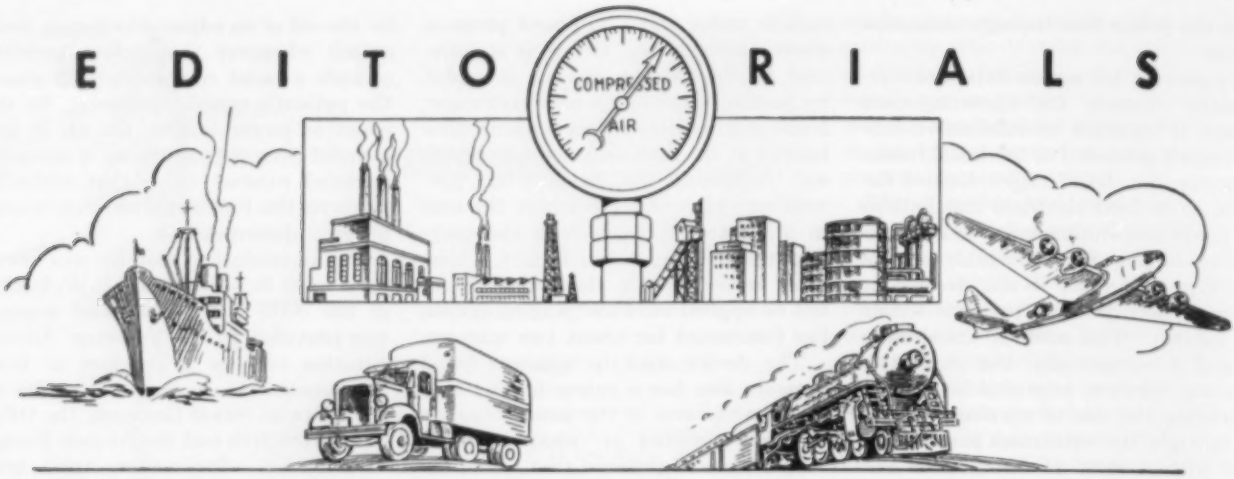

A WORD FOR THE RAILROADS

TWENTY-ONE manufacturing concerns have banded together to try to help out an old and valued friend and customer. It's not a wholly unselfish gesture because if the customer prospers the sellers will too. The customer is the nation's railroads, which are healthier than they were a few years ago but still not exactly robust. Admittedly the backbone of the country's transportation system, the rail carriers are continually being squeezed between competition and regulation and never make any worth-while profits unless our entire economy is moving at top speed. When revenues sag, the roads have to retrench and defer improvements that they would like to make in order to better their competitive position.

The mission of the 21 railway suppliers is to educate the public as to the problems the lines face and the efforts that they have made, against odds, to solve them. Through publicity of various kinds they are bringing out that the railroads, contrary to general opinion, are progressive and forward-looking and kept from being more so solely by lack of funds. They are pleading for a better understanding of the carriers' difficulties and a relaxing of the bonds of regulation that sometimes hamstring their efforts. It is contended that their profits would increase if they were given more freedom in running their own affairs, and more money would be plowed back for making improvements.

The plight of the railroads stems from the fact that they were once a monopoly and are still often treated as such despite marked changes in their status. Around 1900, railroading was about the only really big business in the country and was virtually without competition. The lines acquired such power that governmental restrictions were called for and imposed, and ever since then Uncle Sam has had a tendency to keep a hand in their affairs. In World War I he even took over their operation.

As trucks and buses increased in numbers, the railroads steadily lost out. Between 1929 and 1953 their share of the freight business dropped from 75 to 53 percent, with trucks the major gainers. During World War II they handled 90 percent of the freight and 97 percent of government-directed passenger service. They were temporarily prosperous, but weren't allowed to retain earnings in proportion to the mounting backlog of deferred maintenance.

When the conflict ended, the physical equipment of the nation's 233,000-mile rail network was badly run down. The roads went all out to build it up. In the nine years since 1945 they have spent $10 billion on improvements in addition to $63 billion on operation and maintenance. At the height of the movement, in 1948, they were accounting for one-fifth of all the money spent on industrial improvements. But even those huge outlays have not been large enough to do the whole job, and some people consequently think of the railways as old-fashioned and behind the times. The truth is that the Association of American Railroads conducts a research program that is reducing operating costs by $100 million annually.

The campaign for public appreciation of what the rail carriers are trying to do to help themselves was launched at a luncheon in New York with Benjamin F. Fairless, head of United States Steel Corporation, as speaker. He stressed the effect on all business of the current reduction in railroad income. Steel purchases by the systems in 1954, he said, will be 1½ million tons less than they were in 1953, and that means that 16,000 fewer steelworkers will be employed.

"It seems to me," Mr. Fairless declared, "that the Committee of Railroad Suppliers is doing our country a great service — and a very timely one — by launching this nation-wide campaign to give the American people a fresh look at an old and neglected picture . . . to acquaint them with the facts about the railroads, the vital service they perform, the enormous progress they have made, and the terrific handicaps under which they have had to labor."

UNDERGROUND ENERGY SCHEME

THE Government, through the Petroleum Administration for Defense, is weighing the idea of asking the natural-gas industry to build a "Super-inch" line from the Gulf Coast to the Atlantic seaboard. It would normally carry gas but could be converted to crude oil in times of national emergency. Following a meeting with gas-industry representatives, it was decided to defer a decision until all factors involved in the scheme could be studied. It would be necessary, for instance, to obtain customers for the gas who would be willing to have their entire supply suddenly shut off if the line should be needed for transporting oil. The suggested carrier would very likely be 36 inches in diameter and have a maximum capacity of 600 million cubic feet of gas or 750,000 barrels of oil daily.

It was originally hoped that the oil industry would finance such an artery and utilize it in peacetime to move refined petroleum products, with a switch to crude oil if need arose. But this plan fell through because the companies prefer to keep on using their tankships, which represent a large investment. It will be recalled that the "Big Inch" and "Little Big Inch" were built during World War II to transport petroleum and its products after tankers had suffered heavy casualties from enemy torpedoes. The scheme was successful, but the oil industry returned to the sea lanes when the emergency was over and the pipe lines were converted to carrying natural gas.

Fears that the tremendous growth in gas consumption will soon exhaust reserve supplies have been allayed somewhat with the passing years. Although gas sales have increased 235 percent since 1940, and the fuel has been winning from 800,000 to one million new customers per annum since 1950, discoveries of additional deposits are more than keeping pace with the demand. Reserves gained 5.9 trillion cubic feet in 1953 to reach an all-time high of 199.7 trillion cubic feet at the year's end.

This and That

Anthracite Pioneer Retrenches

Lehigh Navigation Coal Company, which has mined anthracite coal in the Panther Valley district of eastern Pennsylvania for 125 years, has ceased all operations there following rejection by its employees of a "work-harder, produce-more" program that it sought to institute. The concern lost $3.4 million on its coal-mining and marketing operations last year. The decision, which the company says is final, removed the oldest active producer from the anthracite lists.

The firm got into the business in a roundabout way. In 1812, Col. George Shoemaker, of Pottsville, Pa., took nine wagonloads of "stone coal" to the Philadelphia area but was able to sell only two of them. One of the purchasers was White & Hazard, predecessor of the Hazard Wire Rope Company now in Wilkes-Barre, Pa., which was the first to learn how to burn the hard-to-ignite fuel and the first to recognize its virtues for industrial heating.

Finding it difficult to obtain anthracite regularly, White & Hazard bought a tract of coal-bearing land near Mauch Chunk, Pa., on the Lehigh River in 1817 and also leased other nearby property. They got the latter for an annual rental of one ear of corn when they agreed to mine and transport 40,000 bushels of coal to their wire mill, the owners figuring that the development of transportation facilities and a market in Philadelphia would greatly increase the value of their land.

In order that they might deliver the coal via the Lehigh and Delaware rivers, White & Hazard succeeded, in 1818, in getting the Pennsylvania Legislature to authorize work on the Lehigh to improve navigation. Others had tried unsuccessfully to do this, but the two partners, with the help of a man named Hauto, tackled the project undismayed. They built a 9-mile road from the mine to the river, and in 1827, when rails were laid, it became the country's first steam railway.

They deepened the river by blasting its rocky bottom, and when unusually low water grounded the boats, they created a series of connected pools by constructing crib dams and fitting them with locks. Chains of boats, built from timber cut near the mine, carried the coal to Philadelphia, where they were dismantled. The lumber was sold and the nails and other iron were returned to Mauch Chunk to be reused.

Later, to meet competition from the Schuylkill Navigation Canal, canalization of the Lehigh and Delaware was begun, and White supervised the excavation of the Lehigh branch. This waterway was opened in 1829 and connected at Easton, Pa., with the Morris Canal, which ran across New Jersey to New York Harbor. Subsequently, the Lehigh Navigation Coal Company branched out into other parts of the anthracite field and remained, for nearly a century and a half, an important factor in the hard-coal industry.

★ ★ ★

Inco Is Chimney Champ

The tallest smokestack in the British Commonwealth is rising skyward at Copper Cliff, Canada, to serve International Nickel Company's new $16 million smelter where, for the first time, high-grade by-product iron will be recovered from nickel ores. The stack, of reinforced concrete lined with special brick, will extend 615 feet above a 22-foot-high base and weigh 17,000 tons. It will have an outside diameter of more than 63 feet at the bottom and an inside diameter of 30 feet at the top. The Empire chimney championship won't shift very far when the new structure is completed because it is already held jointly by two 500-foot stacks at another Inco Copper Cliff smelter.

★ ★ ★

Hoover Tunnels Exceeded

Sweden's new Kilforsen 285,000-kw hydroelectric generating station, which was put into operation on May 20, has some unusual features. It utilizes a head of 324 feet that results from a series of nine rapids in the Fjallsjo River. After use, the water is discharged into another stream, the Angerman.

From a storage reservoir, created by erecting a dam at the head of the rapids, water flows through a 1.2-mile canal and then through a 2.4-mile tunnel into a second reservoir. The bore is approximately 42 feet wide and 55 feet high and its cross section of 2240 square feet is the largest opening of its kind. (The four 56-foot-diameter diversion tunnels driven at Hoover Dam in 1931-32 had a cross section of roughly 2149 feet before being lined).

It was necessary to provide means that would permit floating logs through the bore destined for sawmills or paper mills, and about five million of them will be handled annually. A traveling, motor-driven platform makes it possible to observe the sticks so as to prevent or unlock jams in the passageway. For the further transport of the logs, a small amount of water released from the second reservoir flows through a flume to the Angerman River, while the remainder is precipitated down a 324-foot vertical shaft to three Francis turbines that discharge into the Angerman by way of a 2-mile tunnel with a cross section of 1890 square feet.

The construction program involved the excavation of around 2,100,000 cubic yards of rock and an equal amount of rubble and earth. The undertaking, which was in charge of the State Power Board, cost about $28 million. Work was begun in 1947. For the convenience and comfort of the workers, who numbered as high as 1100, a complete town with such facilities as a community center, a library and hobby workshops was built in the remote area. Some constructed their own homes; others lived in houses provided for them. Completion of the station marked a continuation of the trend towards increased power generation in Sweden, where one-fifth of all postwar industrial capital invested has been spent for that purpose.

★ ★ ★

Petroleum Facts and Figures

Petroleum and natural gas supplied less than one-third of the nation's energy needs 25 years ago, but by 1953 the proportion had mounted to two-thirds. America accounts for 62 percent of the free world's consumption of crude oil, and its products and per capita use of them is twenty times that of the remainder of the population involved.

At the beginning of 1954 we had 501,-859 producing oil and gas wells scattered over 28 states. The average 42-gallon barrel of petroleum yields 18.9 gallons of gasoline, 8.7 gallons of light fuel oil, 7.4 gallons of heavy fuel oil, 2.1 gallons of kerosene, 0.9 gallon of lubricating oil and 4 gallons of miscellaneous substances such as coke, asphalt and waxes. The greatest concentration of oil refineries is on the Gulf Coast. Those in the strip extending from New Orleans, La., to Brownsville, Tex., have a combined refining capacity of 2,547,000 barrels per day, which is one-third of the country's total. They cost upwards of a billion dollars, and during the next two years $200 million will be spent in expanding them.

It is believed that the first drive-in automobile service station was opened in 1905 at the plant of the Automobile Gasoline Company in St. Louis, Mo. The American Petroleum Institute claims that there are so many stations now that a motorist could drive from New York to Los Angeles over the main highways with a gasoline tank holding only one gallon. He would always be able to reach another "gas" pump before the tank was empty.

Industrial Notes

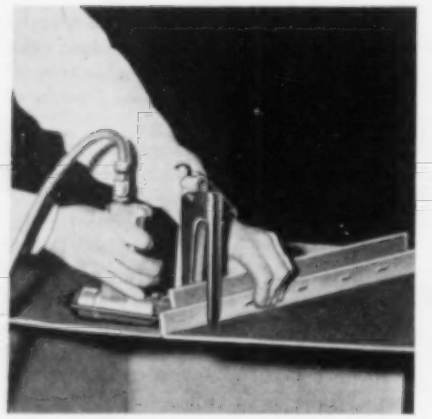

For production-line use, Senco Products, Inc., has announced a line of staplers for light- and heavy-duty service in manufacturing furniture, in upholstering, in applying automotive trim and for other purposes especially with pressed and hardwood where extra holding power is required. Of light weight to lessen fatigue, the units are actuated by a trigger and can be held in any convenient position. (The one pictured is shown with the operating mechanism horizontal and the magazine vertical.) Compressed air serves to draw the anvil into tacking position and to drive and clinch staples ranging in length from 5/32 to 1/2 inch and having narrow and wide crowns. The force of the clinch may be varied by regulating the air pressure.

Circle 1E on reply card

Maintenance men of electric utilities, etc., will have no trouble locating buried conduits, tanks and the like if Filtration Equipment Corporation's aluminum divining rod does all that is claimed for it. Called Findzit, it consists of two rods that are held parallel to the ground as the operator walks along. Upon approaching the object of his search the rods begin to swing outward, and by the time he is directly over it they are as far apart as they will go. The device is also said to be a depth detector. For that purpose the user holds the two rods close together while standing on the spot beneath which the pipe or tank lies and backs away. Depth is determined from the distance between the two outer points when rods stop moving laterally.

Circle 2E on reply card

A new type of joint for vitrified clay pipe from 8 to 36 inches in diameter has been announced by the Clay Sewer Pipe Association, Inc. Called Pressure Joint, it consists of a hollow rubber gasket much like an automobile inner tube. It is slipped around a pipe's spigot end, which is then inserted into the bell of the adjoining length. Extending from the gasket is a short filler sleeve through which a grout mixture is forced into the gasket until it is uniformly expanded under a pressure of 50-60 psi. A metal collar crimped over the sleeve seals it, and the grout sets to form a tight joint.

Circle 3E on reply card

Seizing and galling of threaded fasteners exposed for protracted periods to temperatures up to 1200°F is prevented, it is claimed, by Thred-Gard, a non-hardening compound offered by Crane Packing Company.

Circle 4E on reply card

To facilitate the handling of steel sheets measuring up to 40x40 inches, The Union Tool Corporation has designed an automatic vacuum lift that is ready for service when connected to air and electric lines. It has a built-in vacuum system controlled by push button and not only picks up the sheets but also places them neatly on pallets,

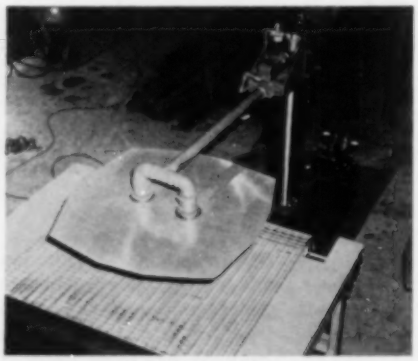

conveyors or machines for processing. The unit has a lifting range of 36 inches, and the 4-foot arm to which the large-area vacuum plate is attached swings through an arc of 180°. Both lateral movement and height are adjustable within the given limits. The lift is said to handle from one to six sheets per minute and consumes approximately 0.6 cf of air per cycle.

Circle 5E on reply card

Disruption of pneumatic process or control systems is prevented, it is said, by use of an automatic shut-off valve designed by Builders-Providence, Inc. The unit embodies a spring-loaded diaphragm which, under normal conditions, is balanced by line pressure on one side and system pressure on the other. If this balance is disturbed by a drop in pressure or failure of the air supply, the diaphragm closes a needle valve and locks the control valves or devices.

Circle 6E on reply card

Better than normal thermocouple protection is provided by a metal-ceramic well announced by The Bristol Company. It is said to combine the thermal conductivity and shock resistance of metal with the oxidation and deformation resistance of ceramics and, because of a wall thickness of only 1/8 inch, drastically reduces time lags in temperature response. The LT-1 tube is available in lengths of 12, 18 and 24 inches, as well as in complete thermocouple assemblies.

Circle 7E on reply card

By use of Zero-Mist, Udylite Corporation claims that chromium-plating operations can be conducted without the usual chromium-acid spray that wastes the solution and contaminates the air. Additive is said to be stable and not affected by concentrated chromium-acid bath at any temperature and by high-current densities. It eliminates the need of water-wash systems.

Circle 8E on reply card

For applications where extremely fine particles in air are to be reclaimed in a dry state, American Filter Company, Inc., has designed a collector that is cleaned continually with air under pressure. Entrained solids in the process air are prevented from clogging the cloth filtering tubes by forcing high-pressure air through them in the opposite direction to the flow from which the dust is to be removed before it is exhausted to atmosphere or into the working space.

Circle 9E on reply card

Simultaneously inspecting seven critical dimensions on shell and similar bodies is easy with this Multichek, an electrical multiple gauging instrument made by The Sheffield Corporation. All the operator has to do is place the part on a loading platform, slide it into position, and look at a diagram panel with a white master light and seven signal lights—one for each dimension. When the master light remains white and the signal lights black out he knows that all the dimensions are within tolerance. But if the master light turns red and one or more

of the signal lights glow red or green (indicating under- and oversize, respectively) he can tell at a glance which dimension or dimensions are faulty. As before, blacked-out signal lights denote correct dimensions.

Circle 10E on reply card

Askania Works, represented in the United States by Epic Inc., has announced a new hand Vibrograph, a compact instrument in a leather carrying case that is said to simplify the work of measuring mechanical vibrations destructive to machinery, shafts, cables, springs, vehicles, aircraft, ships, etc. Operated by its own clockwork, it has a built-in 6-volt, dry-cell battery that supplies a time marker with current. Interchangeable feeler rods, that may be extended to reach inaccessible places, make measurements by contact, and legible records are cut by a stylus on trans-

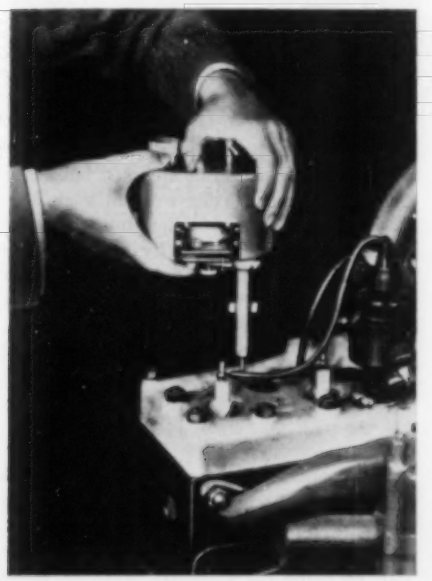

parent wax-coated paper tape. Two other attachments are available: one for measuring torsional vibrations, which is applied to the shaft of a motor, gears or spindle to be checked; and the other, which is mounted like a pressure gauge, for registering pressure vibrations in boilers and pumps and in lines conveying liquids or gases. The unit is designed for frequencies from 0 to 250 cps, accelerations up to 50 g and has an amplitude range from 0.00001 to ⅜ inch.

Circle 11E on reply card

If a farmer has a surplus of wheat he may soon have a market for it as a building material. Like breakfast food, the whole kernels are puffed, for this purpose to twenty times their original size, and mixed with resins, to serve as a binder, and weather-, fungi- and insect-resistant chemicals. When compacted under heat and pressure, the mass is converted into a product suitable for use as wallboard, door paneling, etc. The material is still in the experimental stage but is said to be exceptionally strong and low in cost. It was developed by Reed Research, Inc., Washington, D. C.

Kerodex, a medically tested hand cream that is said to provide maximum protection against many skin hazards, is available for the first time to American workers. It is an improved formula of the cream originally developed under British Government auspices in World War II to combat labor absenteeism caused by skin diseases. Different preparations are available for use in wet and dry work, against the irritating action of natural or artificial light rays, the photosensitizing action of tar, pitch and asphalt fumes, etc. It may be applied with safety to any area of the skin.

Circle 12E on reply card

By use of a small, air-powered control drive newly designed by Bailey Meter Company, gas and liquid-flow regulation of butterfly valves, dampers, feeders, etc., in process plants can, it is claimed, be markedly improved. The unit operates on a straight-line flow characteristic and on standard SAMA signal ranges of 3-15 and 3-27 psig. The signal actuates a relay which, in turn, positions a lever arm powered by a piston with a 4-inch stroke at a torque of 75 foot-pounds. Time required for the full travel

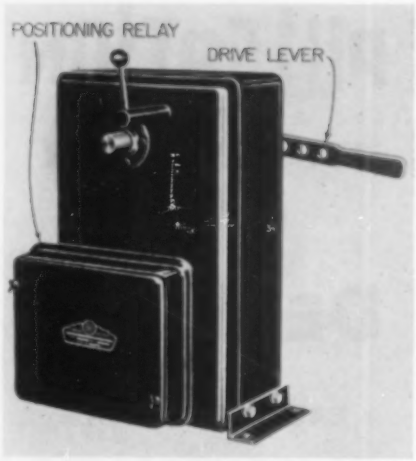

of 75° is adjustable. The control drive measures 10x11x19 inches and can be installed in any position on a pipe, column or any other flat surface.

Circle 13E on reply card

Easy-to-install insulation for hot or cold pipe-line fittings is a new product of Owens-Corning Fiberglas Corporation. It is molded in half sections of Fiberglas in conformity with standard cast-iron fittings for ½- to 8-inch pipe and butt-welded long-radius fittings for 2- to 8-inch pipe. Certain sizes are available for gate and glove valves. The exterior surface of the insulation is

DIG DEEP . . . LIFT . . . AND CARRY FAR

Tri-State Zinc Mine uses Sauerman Slackline Cableway for open pit mining.

Scraper bucket returning to pit where it is digging 200 cu. yds. per hour.

How Sauerman Machines Cut Costs

With one man at the controls, a Sauerman Scraper or Slackline Cableway can reach out 1,000 ft. or more and dig, haul and dump ore, sand, gravel or any bulk material. Simple operation! Manpower economy!

A Sauerman machine can be installed to reach across a pit, pond, river or stockpile, or up to the top of a hill. It moves material rapidly anywhere within its wide radius. Flexible for varied ground conditions. Costs only a few cents per cubic yard handled. Gas, electric or diesel. Scraper sizes: ⅓ to 15 cu. yds. Slack lines: ⅓ to 3½ cu. yds.

Write for Illustrated Catalogs

Sauerman Bros., Inc., 548 S. Clinton St., Chicago 7, Ill.

ONE MAN MATERIALS HANDLING

SAUERMAN BROS., INC.

Circle 14A on reply card

PULSATION

HANDLED WITH EASE BY

DE ZURIK

EASY-OPERATING PLUG VALVES



On lines handling compressed air, DeZurik Easy-Operating Plug Valves remain in hard service month after month . . . . **despite** pulsation and vibration!

The dead-tight seal of the rubber-faced plug and metal valve seat is not affected by line surge or valve strain. The plug won't distort or stretch. DeZurik Valves close tight in spite of grit or other particles in the line!

Exclusive eccentric action permits air-tight shut-off or wide-open flow with an e-a-s-y quarter-turn of the handle.

DeZurik Valves are manufactured in a full range of sizes and metals; in manual or automatic operated models. Write for details.

DEZURIK
SHOWER COMPANY
SARTELL, MINNESOTA

Circle 15A on reply card

smooth and may be painted or covered with canvas, mastic or cement and the halves may be taped, stapled or wired together for temporary or permanent installation.

Circle 14E on reply card

Among Hankison Corporation's latest products is a new model Dehydrafilter, the CM-1, a small unit designed especially for isolated pneumatic equipment such as liquid-level indicators, louvre and damper operators and single-valve installations in dead-end and low-flow service. It consists of a head and case holding a cartridge filled with variable dessicants, depending on requirements. Compressed air or other gas from the source of supply, which may enter either at the top-right or left, flows down an annular space between the case

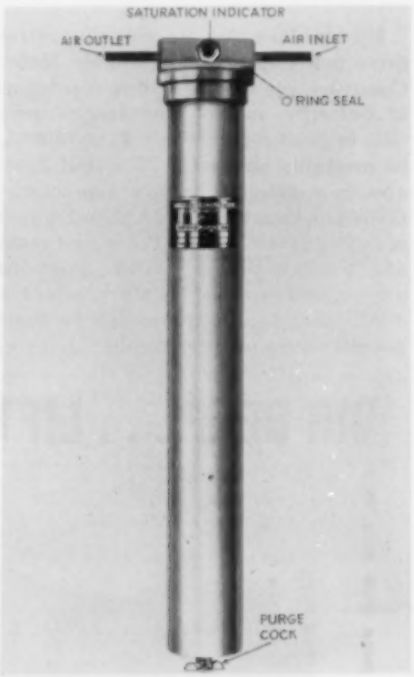

and the cartridge, up through the filtering medium and out at a point opposite the inlet. But before the dry air is discharged, it passes through a visual saturation indicator which turns from blue to pink when the cartridge has to be reactivated in an ordinary oven. No tools are needed to effect replacement because of the unit's O-ring seal construction. The CM-1 is rated at 1 scfm at 100 psig and 70°F and is said to assure dew points as low as minus 67°F.

Circle 15E on reply card

The straight-line strainer shown in the accompanying illustration is designed to supply an uninterrupted flow of clean water, air or other gases for the protection of equipment, appliances, valves and controls. Of noncorrosive construction throughout, it has a large straining area and is provided with union couplings to facilitate installation and removal for servicing. A product of Industrial Sales

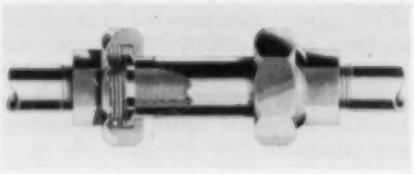

Division of Hays Manufacturing Company it is known as Straitflo and is said to reduce friction, turbulence and loss to a minimum. It is available in pipe sizes ranging from ¼ through 1 inch.

Circle 16E on reply card

Improvements in its self-sticking pipe markers have been announced by W. H. Brady Company. They are said to have twice the adhesive properties of the earlier type and to stick tight at temperatures from minus 300 to plus 300°F, continuous, and of 450°, intermittent. More than 1000 different markers are carried in stock and special ones are made to order. Samples are available.

Circle 17E on reply card

Lightweight, high-strength titanium bolts have been developed by Standard Pressed Steel Company after two years of research. Though intended primarily for the construction of aircraft, they can be produced to order in well-nigh any design and size for the chemical and other industries, especially where resistance to corrosion is a factor. Six types are available: two lines of flush-head shear bolts, two of internal-wrenching tension bolts, and one each of external hexagon shear bolts and external-wrenching tension bolts.

Circle 18E on reply card

By means of a pneumatic hand tool designed by Acme Steel Company, the work of strapping narrow or wide, flat or round bundles, packages or objects can be done on a production-line basis without physical effort on the part of the operator. Designated as a friction-type stretcher, it is actuated by a throttle and applies steel strip, inserted into it, at uniform tension set by an adjustable air-pressure regulator, any amount of slack being taken up by rotary gripping dogs. Tools are available in weights ranging from 3½ to 9½ pounds, the one pictured being a 7½-pound model for use where operating surfaces are limited. It is suitable for strapping irreg-

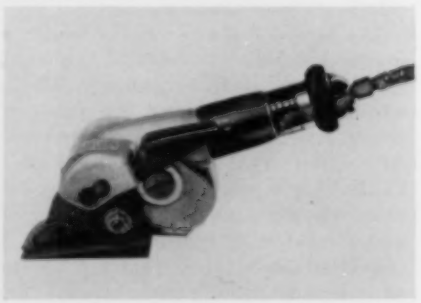

ularly shaped products such as transformer cores, metal bars and strip material and even automotive parts on skids and building stones on pallets. Ends are sealed and crimped by a special plierlike tool.

Circle 19E on reply card

Telematic Corporation is offering an air-feed drill head with Hydro-Check control that is designed to meet industry's need for a low-cost flexible unit suitable for high-production multiple-hole drilling operations. It has an over-

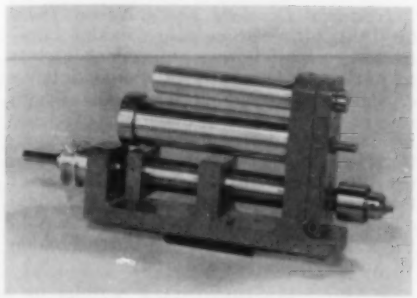

all length of only 12½ inches, is 2 inches wide, has a 2-inch stroke with quick return and is powered with air at 20 to 150 psi, line pressure. Construction permits removing air-feed cylinder and Hydro-Check individually without disturbing the head or setup. Sides and bottom of the body are machined square and parallel to the spindle to simplify aligning drill. The unit is available mounted on a T-base with an automatic air-control box and cycle timer.

Circle 20E on reply card

What is described as an unusually adaptable gauge for plus, minus and differential readings has been announced by the F. W. Dwyer Manufacturing Company. Designated as the I-V, it is said to serve as an air-velocity meter, draft gauge, static-pressure indicator, air-filter gauge, etc. Equipped with a plunger-type oil-level adjuster, it is avail-

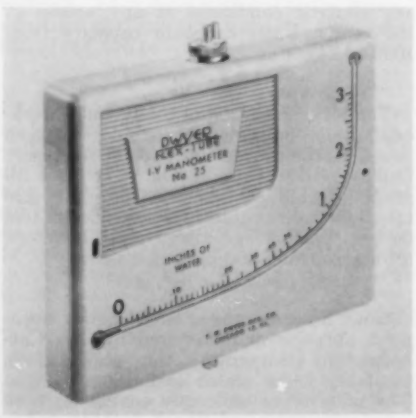

able in ranges of 0-3 and 0-7 inches water. The new instrument is also made in a direct-reading velocity model for use with a pitot tube and in ranges of 0-7000 and 0-10,500 feet per minute.

Circle 21E on reply card

now even better

SKF Triple-Seal "SAF" PILLOW BLOCKS

BETTER Because SKF's Type "C" Spherical Roller Bearings . . . .

Increase capacity 25% to 50%
increase service life 2 to 3½ times

The big news in bearings—news from SKF—is the Type "C" Spherical Roller Bearing—as a replacement for ordinary sphericals, size for size, lasts *2 to 3½ times longer, increases capacity up to 50%.*

This improved design is now available in SKF's famous Triple-Seal "SAF" Pillow Blocks.

You get this longer life and increased capacity *in addition* to—

- Effective sealing from dirt.
- Lubricant retention.
- Adapter mounting for tight fits on standard shafting.
- "Free" or "Held" design.
- Easy installation and inspection.
- Self-alignment.
- NO INCREASE IN COST!

YOUR SKF DISTRIBUTOR will give you complete details about the "C" bearing and a copy of SKF Bulletin No. 365 which contains technical data, sizes available, increased life and capacity you can expect for each size.

SKF INDUSTRIES, INC., PHILADELPHIA 32, PA.
—*manufacturers of* SKF *and* HESS-BRIGHT *bearings.*

7521

SKF®
BEARINGS AND PILLOW BLOCKS

Circle 16A on reply card

THIS PIPE GIVES EXTRA HANDS TO CONTRACTORS

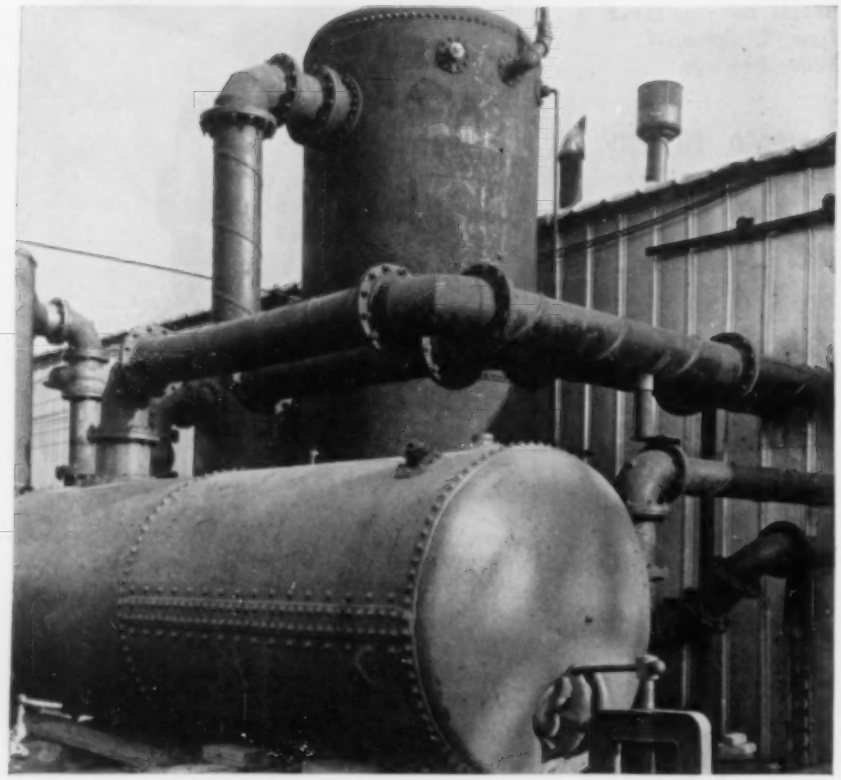

Lines of large diameter Naylor pipe are just like extra hands in the construction field. They carry air. They carry water. They do a whale of a job on ventilating in tunnel work and other underground construction. Light weight makes Naylor lines easy to handle and install. The extra strength of the lockseamed-spiral-welded structure adds what it takes for these lines to stand up in rough service. The Naylor Wedge-Lock coupling simplifies connection and speeds construction right down the line. Diameters from 4″ to 30″ and wall thicknesses from 14 to 7 gauge provide size range to meet all requirements. Write for Bulletins No. 507 and No. 513.

NAYLOR PIPE

Naylor Pipe Company • 1245 East 92nd Street, Chicago 19, Illinois

Eastern U.S. and Foreign Sales Office: 350 Madison Avenue, New York 17, New York

Circle 17A on reply card

Books and Industrial Literature

The Smithsonian Institution has announced that the ninth revised edition of its Physical Tables is now available. Of 827 pages with index, the book includes new data on the subject of atomic physics, and its 901 tables have been prepared and arranged for easy use. Publication No. 4169 can be obtained from the Distribution Section, Editorial and Publications Division, The Smithsonian Institution, Washington 25, D.C. Price; paper cover, $9, cloth-bound, $10.00.

Industrial Diamond Trade Names Index for 1954, fifth edition, also contains information on the following subjects of interest to users and producers of diamond tools: crystallography and physical and mechanical properties of the diamond; care and use of diamond truing tools; recommendations for the use of diamond turning tools; use of glazier's diamonds; comparison of fine sieves; and British and international diamond tool standards. Publisher, N.A.G. Press Ltd., 226 Latymer Court, London W. 6, England. Price, 3s. 6d.

Catalogue No. 1748 published by Norton Company contains full information about its line of reinforced resinoid grinding wheels. The 28-page book contains many pictures of typical applications and tables of wheel sizes and operating speeds.

Circle 22E on reply card

Stoolcraft is the name of a humorous, illustrated booklet published by Standard Pressed Steel Company and dealing with its Hallowell line of industrial stools and chairs that are designed for comfortable sitting at the job to lessen fatigue.

Circle 23E on reply card

Representative examples of the wide range of custom-engineered equipment built by the Henry Vogt Machine Company for petroleum refineries, chemical plants, power stations and related industries are illustrated and described in Bulletin E-1 now available upon request.

Circle 24E on reply card

Bulletin No. 122 issued by Niagara Blower Company discusses its Type A air conditioner that is designed to control temperature and moisture with precision so that products can be made or processed under any climatic conditions at any season of the year. Units range in capacity from 1000 to 24,000 cfm.

Circle 25E on reply card

The seventh edition of the Carmet Methods Manual on cemented carbides has been issued by the Carmet Division of Allegheny Ludlum Steel Corporation. It lists all grades, including tungsten, titanium and tantalum, and contains information on tool design, brazing, grinding, chip breakers, setups, coolants and cutting speeds.

Circle 26E on reply card

Sand Screen, a new nonclogging open-mesh abrasive manufactured by The Carborundum Company, is the subject of an available folder which includes a sample. The material is uniformly coated on both sides with grains of silicon carbide and is used in sanding ferrous and nonferrous metals, wood, paint undercoats and sealers.

Circle 27E on reply card

In addition to its regular line of bronze, steel and stainless-steel seamless, flexible hose, Cobra Metal Hose Division of DK

Manufacturing Company is offering monel and nickel hose for high-temperature and high-pressure use under extremely corrosive conditions. All are illustrated and described in Catalogue No. 100, which also lists applications and specifications.

Circle 28E on reply card

Morse Chain Company offers an illustrated Catalogue, C14-54, describing its torque limiters—compact, adjustable slip-clutch devices that provide automatic overload protection for machinery drives. Design and operating information is included in addition to specification tables for eleven standard models with torque capacities from 20 to 620 foot-pounds.

Circle 29E on reply card

Bondolite, a high-strength structural material made by Goodyear Aircraft Corporation, is described and illustrated in a folder or 32-page brochure, either of which is obtainable upon request. Originally developed for the aircraft industry, the material has many applications in other fields where toughness and lightness are essential and may be used for decorative purposes.

Circle 30E on reply card

An Approach to Solvent Safety is the title of an address recently made by John B. Moore, president and technical director of John B. Moore Corporation, in which he sets forth seven rules to be followed in selecting solvents for given applications. Though directed to safety engineers of the electric-power industry, the talk is basic to all industries. It has been reprinted for distribution.

Circle 31E on reply card

Air and hydraulically operated plug-valve actuators are discussed in Bulletin 3020 being distributed by Ledeen Manufacturing Company. In addition to typical applications with line drawings and selection tables, the 8-page brochure describes tandem-type actuators for valves that need relatively high operating torques and a new floating-bar type for valves that require lower torques.

Circle 32E on reply card

John A. Roebling's Sons Corporation is distributing a publication that makes it easy for a buyer of wire rope to select what he needs and to order it by code number. Called *Wire Rope Recommendations and Catalog*, it is divided into sixteen sections marked by index tabs for quick reference. Each deals with one of the major industries that use wire rope and gives full data about the product designed for it.

Circle 33E on reply card

A folder on its new line of conveyor belts for food handling or light industrial uses has been published by the Industrial Products Division of The B. F. Goodrich Company. It features both the company's Koroseal belt, resistant to 50° to 150°F and to oils, mild acids, alkaline or neutral salts, and the Kleenseal and Highseal rubber conveyors for applications where temperatures do not exceed 212°F.

Circle 34E on reply card

Form 4153 recently released by Ingersoll-Rand Company deals with its new QM-2 Quarrymaster, a large blasthole drill that can be adapted for either rotary or percussion drilling. Features and applications of both are described, and a double-page spread shows the structural components with explanatory text. The 15-page bulletin contains numerous pictures of Quarrymasters at work on different jobs.

Circle 35E on reply card

Ingersoll-Rand GR-105 compressor, operating backfill tamper. Power—Continental Red Seal F-162.


PUMPS

WELDERS

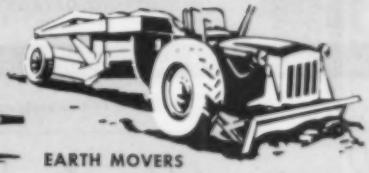
EARTH MOVERS

COMPRESSORS

CRANES


CEMENT MIXERS


ROLLERS

Continental Red Seal power for specialized applications is now available at levels ranging from 2 hp up to more than 1,000, in liquid-cooled and air-cooled models, for use on all standard fuels. And, strictly on the score of *performance*—economy, dependability and low maintenance cost—it is finding its way into more and more leading makes of specialized machines. The equipment builder's good name, and the end-user's satisfaction, are double-clinched by this fact: EVERY CONTINENTAL RED SEAL IS NOT ONLY BUILT FOR ITS JOB, BUT BACKED BY PARTS AND SERVICE FACILITIES COAST TO COAST.

• • •

CONTINENTAL MOTORS® — Powerful as the Nation — AMERICA'S STANDARD

1819 BROADWAY, NEW YORK 23, NEW YORK • 3017 S. SANTA FE AVE., LOS ANGELES 58, CALIF.
6218 CEDAR SPRINGS ROAD, DALLAS 9, TEXAS • 910 S. BOSTON ST., ROOM 1008, TULSA, OKLA.
1252 OAKLEIGH DRIVE, EAST POINT (ATLANTA) GA.

Continental Motors Corporation
MUSKEGON, MICHIGAN

Circle 18A on reply card

THIS AIR TRAP
is not stopped by oil

NOW you can get dependable, automatic drainage of water from compressed air intercoolers, aftercoolers, receivers and separators even though the compressor is pumping heavy oil. Any oil reaching Armstrong Inverted Bucket Air Traps collects at the top and is discharged ahead of the water.



Inverted Bucket Air Traps.
Side-inlet side-outlet styles available.

Armstrong Air Traps have a simple, proven design; there's nothing to stick, bind or clog. Stainless steel mechanism resists corrosion. For pressures to 600 lbs. *Guaranteed to Satisfy.*



ARMSTRONG MACHINE WORKS
885 Maple Street • Three Rivers, Michigan

SEND FOR FREE BULLETIN No. 2021 GIVING DETAILS

Manufacturers of the well known ARMSTRONG STEAM TRAP

Circle 19A on reply card

immediate delivery

SHEAVES • FLAT BELT PULLEYS • HANGERS
PILLOW BLOCKS • COUPLINGS • BEARINGS
COLLARS • "SURE-GRIP" SHEAVES AND PULLEYS • "SURE-GRIP" STANDARD, SUPER AND STEEL CABLE V-BELTS • COMPLETE DRIVES
VARIABLE SPEED DRIVES

T. B. Woods SONS COMPANY

1195 Fifth Avenue Chambersburg, Pa.

Cambridge, Mass., Newark, N. J., Dallas, Tex., Cleveland, Ohio

Circle 20A on reply card

Prominent User Acclaims

"M-B" Automatic Air Line FILTER, REGULATOR and LUBRICATOR Assembly



The value of "M-B" Automatic Air Line Filters, Regulators and Lubricators is widely known for their effectiveness as a protection to Air Valves, Cylinders, Pneumatic Tools, etc.

"Your 'Sentinel of the Air Line' has been giving us very good service. We have had no complaints at all and I trust that we will be ordering more of them in the near future."

signed: **A. E. Cranston, Sr.**
PRESIDENT

Cranston Steel Strapping Co.
Oak Grove, Oregon

M·B PRODUCTS
46 Victor Ave.
DETROIT 3, MICHIGAN

Circle 21A on reply card

Solve Sludge Problem with Nicholson's

New AIR TRAPS

With the introduction of an exclusive new oil-eliminating feature that prevents build-up of scum and sludge, Nicholson air traps now enable you to enjoy the advantages of the positive intermittent action of a float-operated air trap without the common problem of oil congealing on the mechanism and impeding or stopping its action. Other features of Nicholson air traps:

1) No air-wasting vent, such as is in all inverted bucket traps.
2) Positive water seal of valve.
3) Large orifice keeps valve clean, preventing blow-through. Three types; pressures to 1500 lbs. For details send for

CATALOG 953

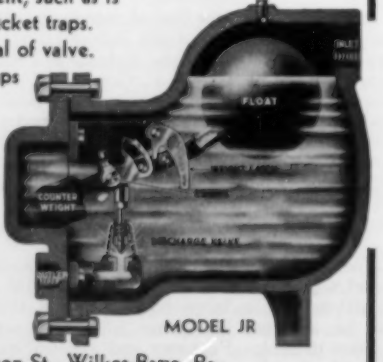

MODEL JR

180 Oregon St., Wilkes-Barre, Pa.

W. H. NICHOLSON & CO.
TRAPS · VALVES · FLOATS

Circle 22A on reply card

This Ring Takes a Fling

To give you a Cradle-Mounted Pump

THAT'S WORTH MORE

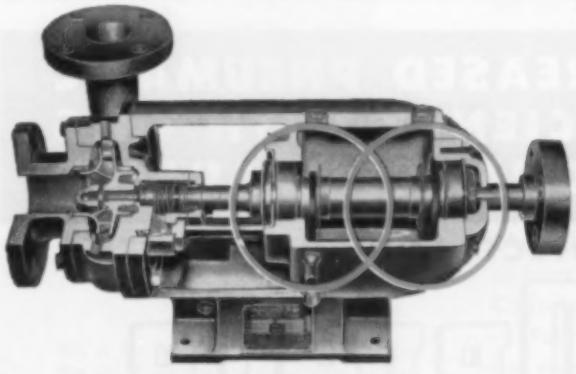

This oil ring is the best known method of lubricating cradle-mounted pump bearings. Two of them ride the shaft of Ingersoll-Rand's CRV pumps, dip into the oil reservoir, fling an abundance of oil and mist onto the ball bearings.

But these are more than just flinger rings. They are examples of the extra value that's built into every I-R cradle-mounted pump . . . to give you more for your money in design and construction, that adds up to longer pump life with less maintenance.

There are easier, less expensive ways to lubricate bearings; easier, cheaper ways to build pumps—but none of these are the Ingersoll-Rand way. Check today on the I-R way of building more on-the-job value into every pump. Your nearest distributor or Ingersoll-Rand branch office will be glad to tell you, without obligation, the complete story about Cradle-Mounted pumps and Motorpumps.

Cameron Pumps ARE Better

9-3

Ingersoll-Rand

Cameron Pump Division
11 Broadway, New York 4, N. Y.

Single-Stage Motorpump
Capacities to 1800 GPM

Two-Stage Motorpump
Capacities to 300 GPM

Four-Stage Motorpump
Capacities to 60 GPM

Cradle-Mounted Pump
Capacities to 2600 GPM

Circle 23A on reply card

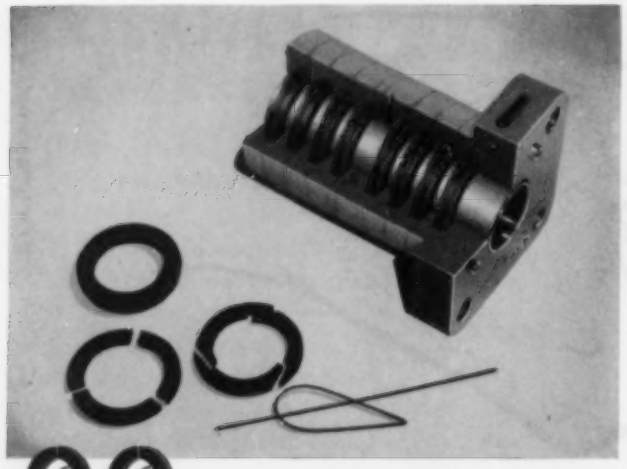

Look to COOK for Better CARBON PACKING RINGS!

Cook carbon packing rings are made of a special carbon graphite material that automatically assures you *high resistance to wear, chemical inertness and excellent heat conductivity.*

If you have sealing requirements for non-lubricated compressors, write today for a sample carbon ring, plus literature on Cook's complete line of packing materials. Address C. Lee Cook Manufacturing Co., 916 South Eighth Street, Louisville 3, Ky.

C. LEE COOK MANUFACTURING CO.

Sealing Pressures Since 1888

Circle 24A on reply card

Leaking Air is an expensive luxury

If you can't afford it,

HILLS-McCANNA *Saunders Patent* **diaphragm valves**

will put an end to it!

WRITE FOR LITERATURE

HILLS-McCANNA *Saunders Patent* **diaphragm valves**

HILLS-McCANNA COMPANY, 2361 Nelson Ave., Chicago 18, Ill.

Circle 25A on reply card

DRI AIR MAY BE INSTALLED BY SUSPENDING IT FROM THE PIPING WITHOUT ANY OTHER SUPPORT.

INCREASED PNEUMATIC EFFICIENCY WITH THIS AUTOMATIC SEPARATOR

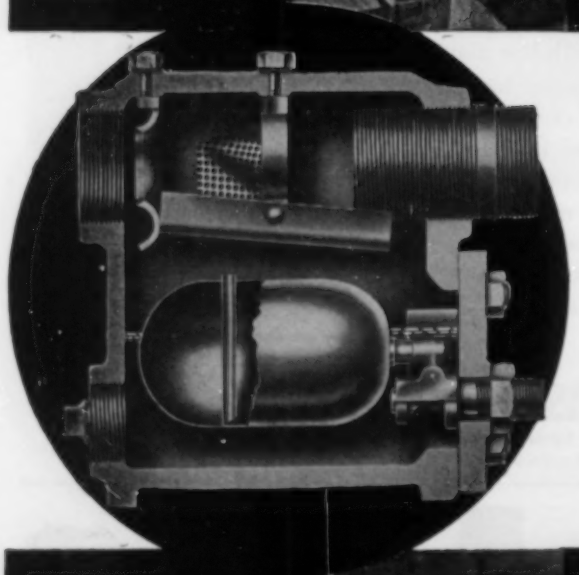

PROTECT EQUIPMENT WITH DRIAIR

SEPARATES • COLLECTS • DELIVERS

• DriAir separates and automatically ejects the condensed water and oil from compressed air lines, collects pipe scale and rust, delivers clean dry air to tools and other pneumatic equipment. This promotes better lubrication, reduces wear, increases life of tools and produces greater output. All internal parts are made of bronze or copper—resistant to corrosion and practically permanent.

A TYPICAL INSTALLATION SHOWING DRI AIR STANDING ON A CONCRETE FLOOR NEXT TO THE WALL.

WRITE FOR BULLETIN DA WHICH FULLY DESCRIBES THE CONSTRUCTION AND OPERATION OF THE DRIAIR.

NEW JERSEY METER CO.

"SPECIALISTS IN COMPRESSED AIR DEVICES"

PLAINFIELD, NEW JERSEY

Circle 26A on reply card

how much can air ejection boost your production

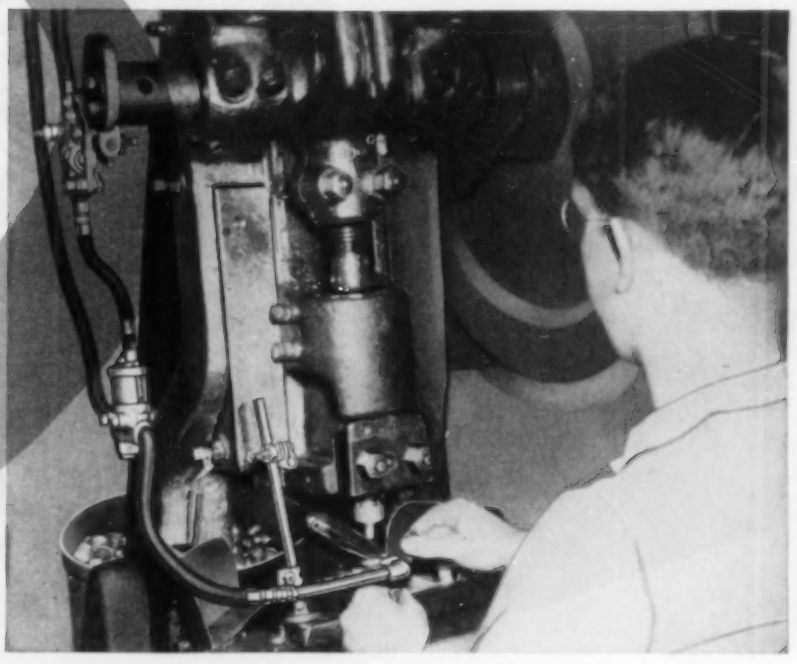

Actually, it can *double production.* With Schrader Air Ejection Sets on your presses, after each press cycle, there's a quick puff of air—automatically timed to do the job just right—and you're set for the next blank to be inserted.

No more tedious, dangerous hand removal!
No more wasteful steady air blasts!

Schrader Air Ejection Sets come in many types to suit any need. You can buy them for cam operation off the crankshaft, or for roller tripper actuation from the ram. If the parts you are fabricating are too heavy to be blown from the dies by an air blast, the Schrader Cylinder Knockout Set is available, which utilizes the knockout force available from a push-type Schrader Cylinder.

But regardless of the type of ejection set you need, you'll find one exactly suited to your requirements at Schrader. Schrader Air Ejection Sets come complete with all necessary fittings, valves, hose and air line accessories—all ready to be bolted to your press. Write today for full details.

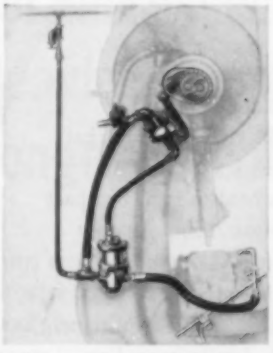

This is the Schrader No. 3208W Air Ejection Set. Similar sets are available for cam or tripper operation, with or without pilot valve timing.

Schrader
REG. U. S. PAT. OFF.

leaders in air control

since 1844

Air Cylinders • Operating Valves • Press & Shear Controls • Air Ejection Sets • Blow Guns • Air Line Couplers • Air Hose & Fittings • Hose Reels • Pressure Regulators & Oilers • Air Strainers • Hydraulic Gauges • Uniflare Tube Fittings

Mail This Coupon Today

A. SCHRADER'S SON
Division of Scovill Manufacturing Company, Incorporated
478 Vanderbuilt Avenue, Brooklyn 38, N. Y. Dept. W-2

I am interested in more information on.....

Name_____ Title_____

Company_____

Address_____

Circle 27A on reply card

MADISON-KIPP *Fresh Oil*

. . . FED UNDER PRESSURE BY THE MEASURED DROP

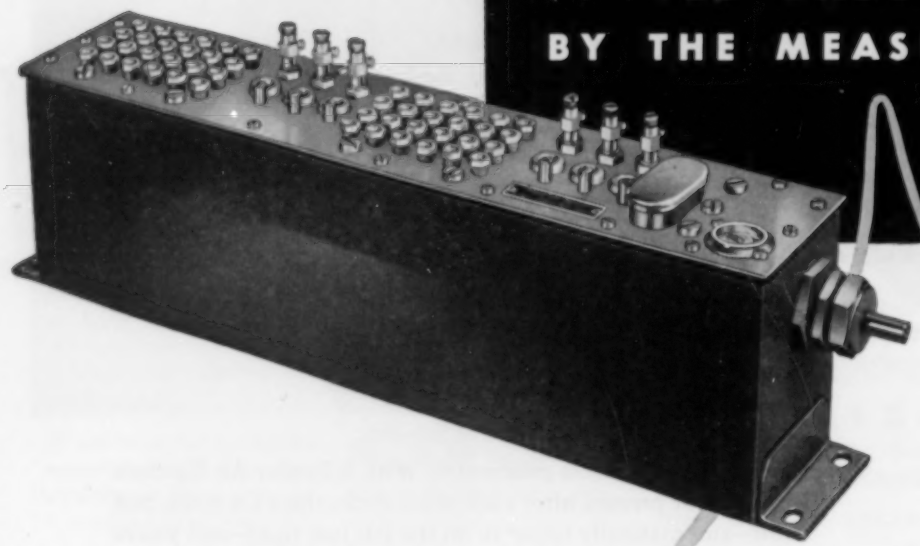

the most dependable method of lubrication ever developed!

This lubricator becomes an integral part of a machine tool in which there are 48 vital bearings that require dependable lubrication. The Madison-Kipp mechanism is so compact that the reservoir measurements are only 4" wide, 19¾" long by 5¾ high."

There are six different models to meet almost every application requirement. Please write us for all details regarding your particular lubricator requirements.

MADISON-KIPP CORPORATION
202 WAUBESA STREET • MADISON 10, WISCONSIN

kipp

• Skilled in Die Casting Mechanics • Experienced in Lubrication Engineering • Originators of Really High Speed Air Tools

Circle 29A on reply card

Ingersoll-Rand uses Nickel Alloy Steel Gears

A size 20 Ingersoll-Rand Multi-vane close-quarter drill reaming a one inch hole in a machine bed plate casting. Extremely close quarter operations on much of today's modern machinery has created a demand for powerful tools capable of getting into narrow corners for such operations as drilling and reaming of holes. And it poses the problem of getting gears which are small enough for the job, yet tough enough to transmit high torques. Ingersoll-Rand Company engineers specified a nickel alloy steel for the bevel gears and pinions in that company's pneumatically operated close-quarter drills.

For Increased Strength . . . Heavier Loads . . . Longer Machine Life

Maximum wear resistance . . . greatest surface compressive strength . . . extremely tough cores that withstand shock loads as well as fatigue and bending stresses . . .

These are some of the properties you get in gears fabricated from *nickel alloy carburizing steels.*

Furthermore, distortion that accompanies heat treating . . . a chief cause of noisy gears . . . is inherently resisted by nickel alloy carburizing steels.

Direct hardening nickel alloy steels are used for gears carrying heavy tooth loading in applications where resistance to wear and surface compressive stresses is not quite so vital a factor. Here again, the nickel-containing steels develop the required strength more consistently and in heavier sections than carbon steels, and are generally more resistant to shock, fatigue and multi-axial stresses. Distortion resulting from heat treatment may be minimized by using nickel alloy steels. And, their machinability before final heat treatment is very good.

When you face revised stress analysis due to design changes . . . or changed fabricating methods that demand improved response to heat treating . . . remember that the many standard grades of nickel alloyed steels permit specifying the particular type which provides the best set of properties for any reasonable fabrication and service demands.

Investigate all the benefits nickel alloy steel gears can give you. Send us details of your problems for our suggestions.

INCO

THE INTERNATIONAL NICKEL COMPANY, INC. 67 WALL STREET NEW YORK 5, N. Y.

WALWORTH

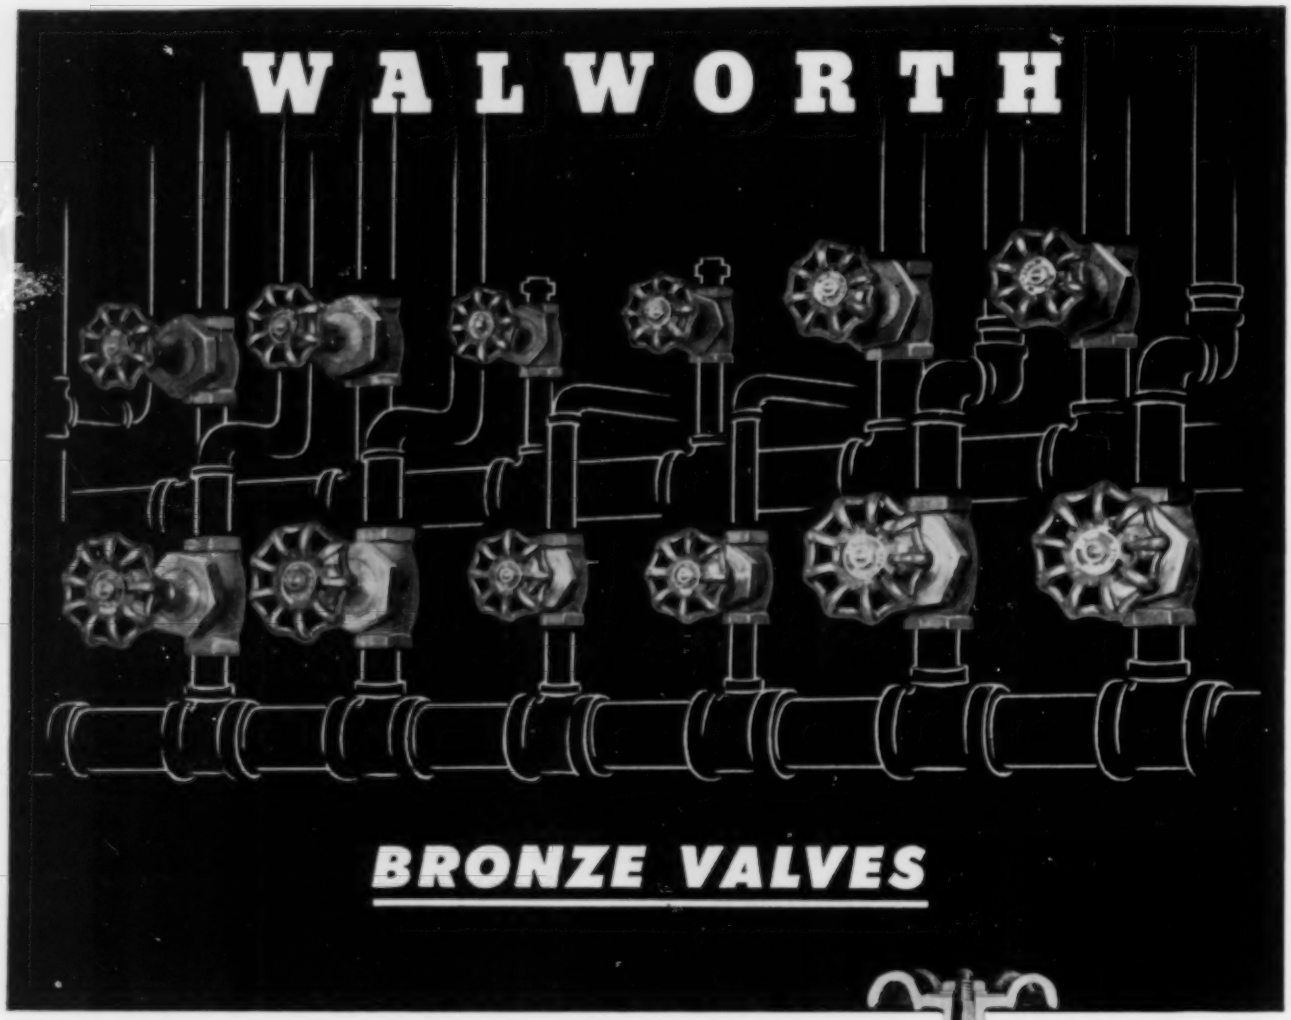

BRONZE VALVES

Better because ... **Walworth has standardized its line of bronze valves to provide an unsurpassed system of interchangeability of parts for assembly or replacement. You can maintain a great number of Walworth Bronze Valves with a small inventory of basic parts . . . you minimize part replacement problems. For further information, ask us for our Bronze Valve Standardization Chart.**

Choose from complete lines of Walworth Bronze Valves – including gate, globe, angle, check, and lubricated plug types. Walseal® Bronze Valves and Fittings are also available for making silver-brazed joints.

For full information on Walworth Bronze Valves and Fittings, call your Walworth Distributor, nearest Walworth Sales Office, or write to Walworth Company, General Offices, 60 East 42nd Street, New York 17, N. Y.

Parts are carefully machined and finished to close tolerances, thereby assuring accurate fit and alignment under all conditions. Sectioned valve is Walworth No. 225P Bronze Globe Valve with stainless steel plug-type seat and disc, heat-treated to a minimum of 500 Brinell hardness.

WALWORTH

Manufacturers since 1842

valves . . . pipe fittings . . . pipe wrenches

60 East 42nd Street, New York 17, N. Y.

DISTRIBUTORS IN PRINCIPAL CENTERS THROUGHOUT THE WORLD

Potomac Electric Power Company's STATION "C"

installing two Ingersoll-Rand

RECTANGULAR SURFACE CONDENSERS

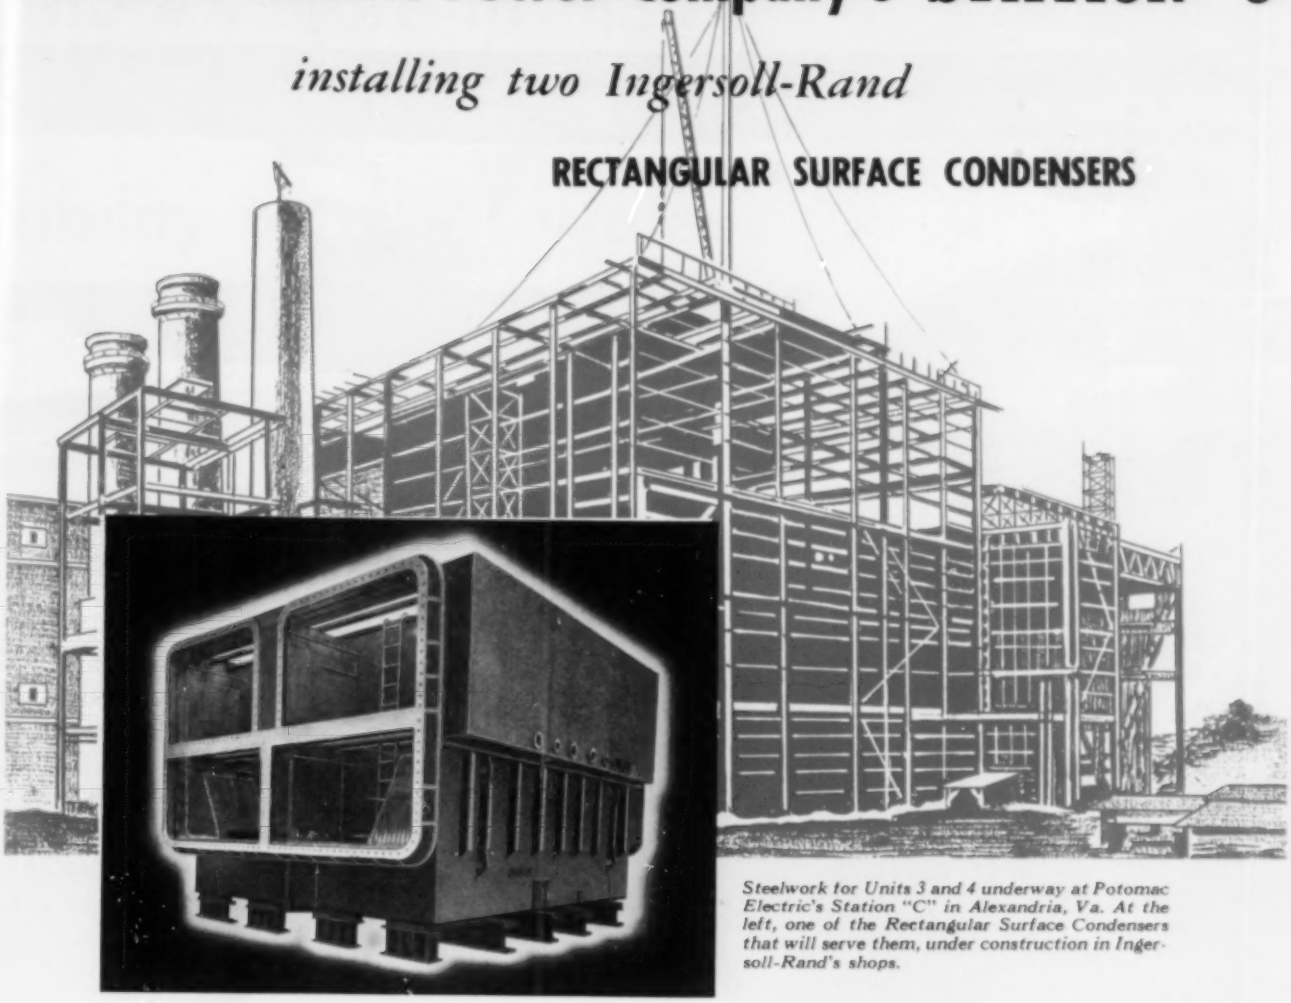

Steelwork for Units 3 and 4 underway at Potomac Electric's Station "C" in Alexandria, Va. At the left, one of the Rectangular Surface Condensers that will serve them, under construction in Ingersoll-Rand's shops.

I-R 70,000 sq. ft. surface condensers to serve 100,000 kw turbines for units 3 and 4

TO meet the ever-growing load demands of the Nation's Capital area, Potomac Electric is adding 200,000 kw to the capability of its Station "C" in Alexandria. Stone & Webster Engineering Corp. are the designers and constructors collaborating with the utility on this project.

Two Ingersoll-Rand Rectangular Surface Condensers have been selected to serve these latest 100,000 kw units. Each condenser will have an effective area of 70,000 square feet and will be served by two Ingersoll-Rand vertical circulating pumps that deliver a total of 60,000 gpm.

Other Ingersoll-Rand equipment at this station includes the condensate pumps, condensate booster pumps and compressors which supply station air.

In this installation, as in many others, the Ingersoll-Rand Rectangular design made the most effective use of the *rectangular* space available beneath the turbine. And through a perfected system of complete shop erection, where all parts are flanged and match-marked, no structural field welding is required. Installation is as simple as possible, considering the size of the equipment. For the complete story on I-R equipment for the power industry, call your nearest Ingersoll-Rand branch office.

Ingersoll-Rand

979-4 11 Broadway, New York 4, N. Y.

PUMPS · COMPRESSORS · VACUUM EQUIPMENT · TURBO BLOWERS · ROCK DRILLS · GAS & DIESEL ENGINES · AIR & ELECTRIC TOOLS

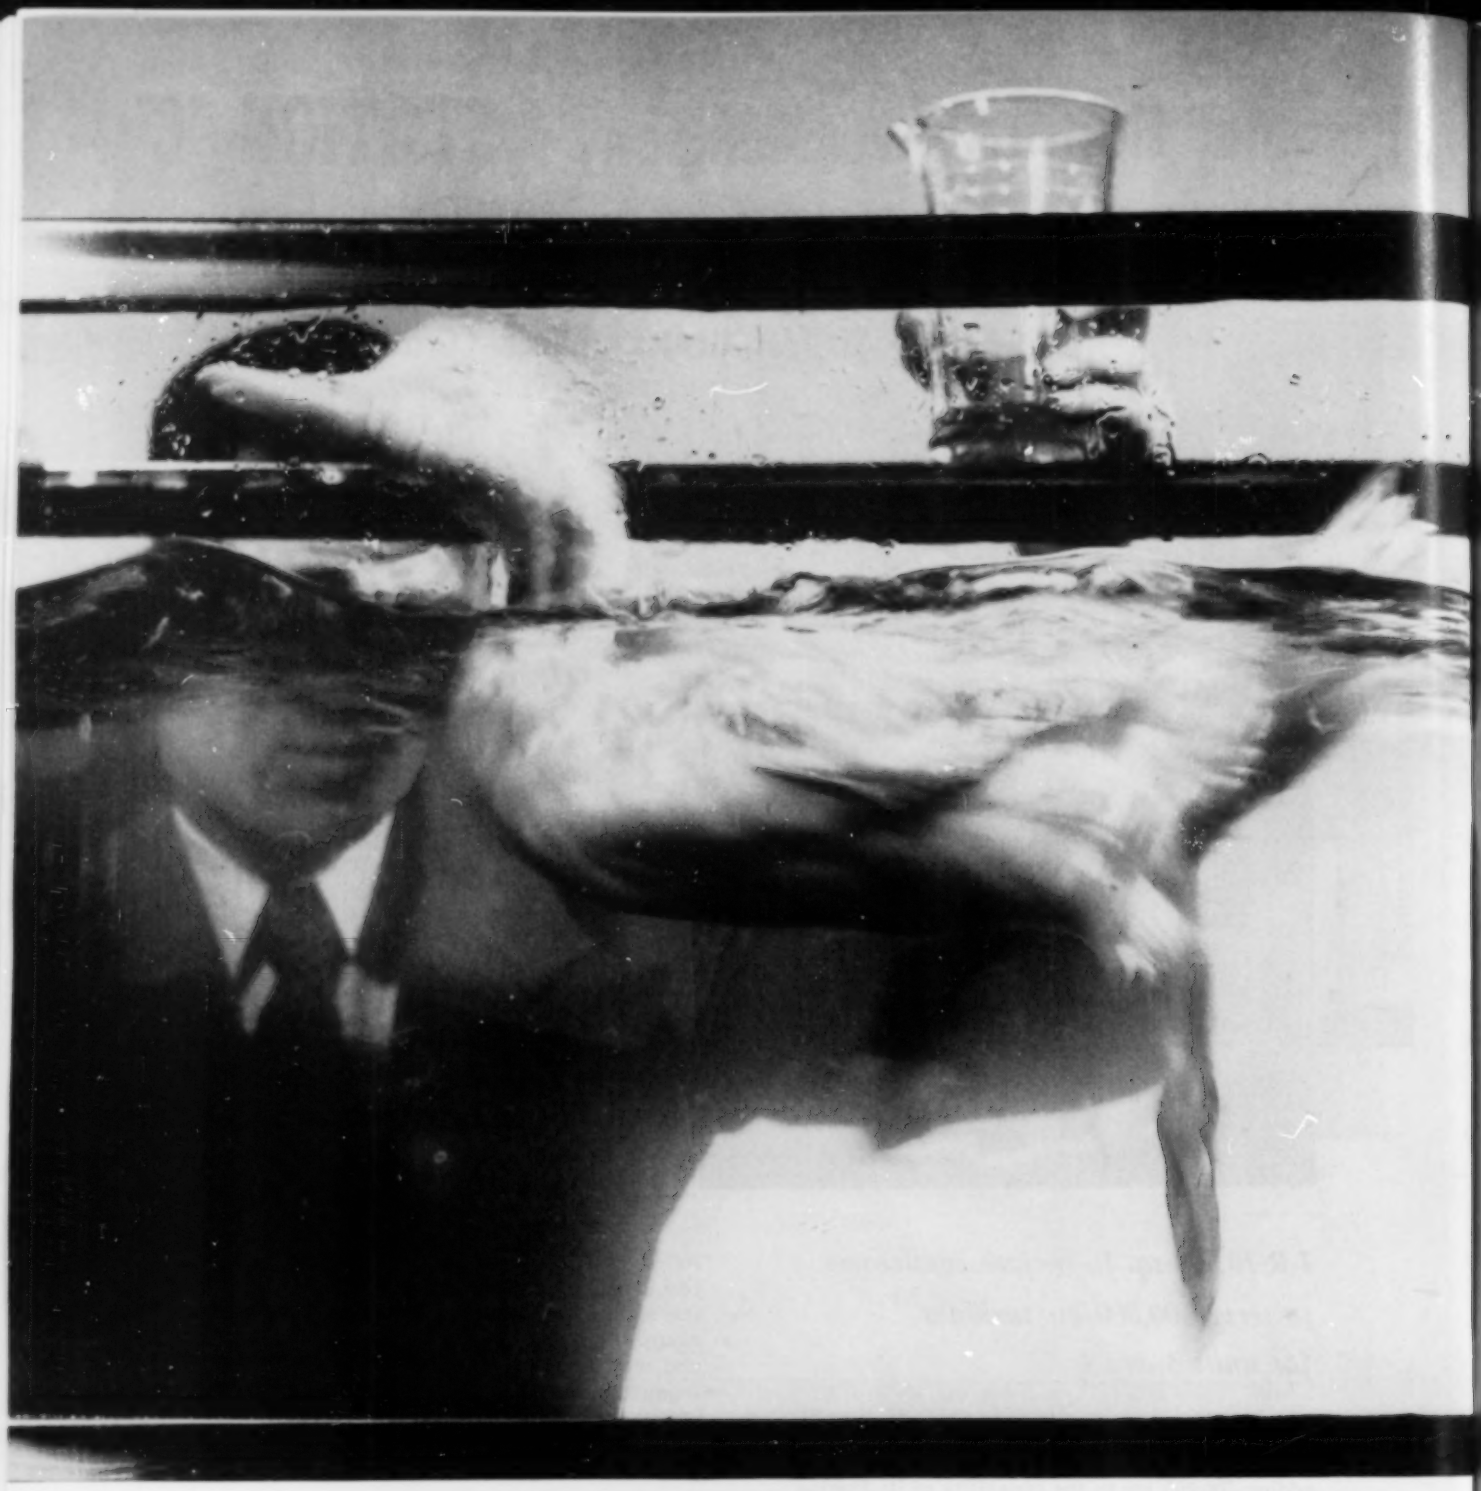

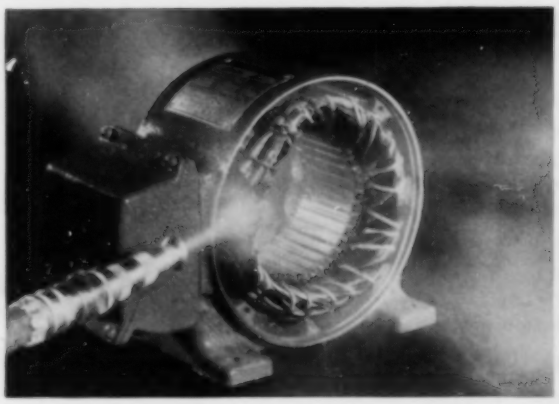

Here's a Life-Line "A" stator that has been given multiple dips and bakes of Bondite. There is no evidence of vapor penetration after being exposed to the toughest insulation test—a jet of steam.

Try tearing a piece of Life-Line's slot insulation, Mylar*. Mechanical strength is eight times greater than ordinary slot cells. Dielectric strength is ten times greater than standard design requirements.

*Trade Mark for Du Pont polyester film

There's more to motor insulation than its ability to repel water

These demonstrations show how new *Life-Line A* insulating materials provide greater protection for wire, slots and complete stator.

New and improved motor insulations are the word of the day. Actually, there is a considerable range between the run-of-the-mill "improved" insulations and the really outstanding types now available. There is only one way to judge them—by comparison.

For example, many new stator insulations do a more effective job of shedding water. But Life-Line's® new Bondite goes a step further . . . it repels vapors that penetrate ordinary water-shedding insulations.

The secret is in the silicone additive that is impregnated throughout Bondite instead of being just applied as a thin outer layer. The complete story of Life-Line's Bondite, Bondar and other new motor improvements is contained in the new Life-Line Booklet B-6154. For your copy, write: Westinghouse Electric Corporation, 3 Gateway Center, P. O. Box 868, Pittsburgh 30, Pa. J-21847-A

YOU CAN BE **SURE**...IF IT'S

Westinghouse

A duck's ability to shed water is only feather deep. A simple wetting agent dissolves the duck's protective coating and he sinks. Many water-shedding motor insulations react much the same; expose them to a simple solvent and they deteriorate.

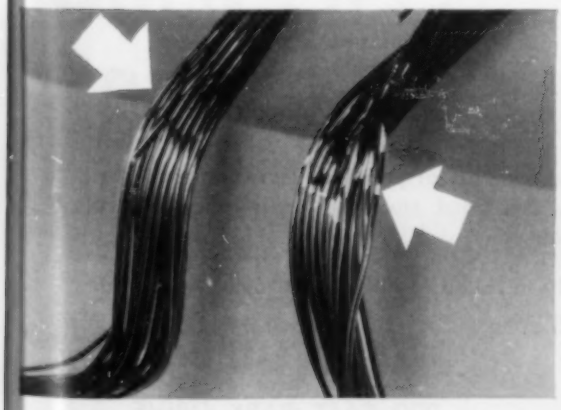

These two coils have been baked for 50 hours at 400° F. Bent around a finger, the ordinary insulation on the right coil flaked off. Life-Line's Bondar insulation on the left remained intact.

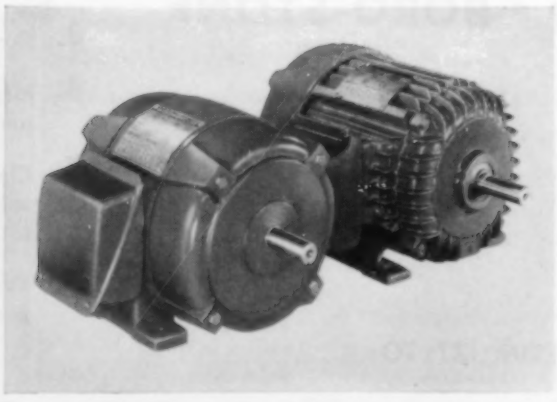

Dependable performance takes balanced design. That's why *every* component in the new Life-Line "A" has been redesigned and integrated with the whole. The result is a motor with superior performance.

LOSING MONEY ON WET, DIRTY AIR?

℞ SEE A SPECIALIST!

ADAMS Aftercoolers are specially designed equipment with prices and delivery that are standardized to save.

Select your aftercooler, either for a new installation or a replacement, strictly on its merits and you will choose Adams. Specifications to suit any compressor installation.

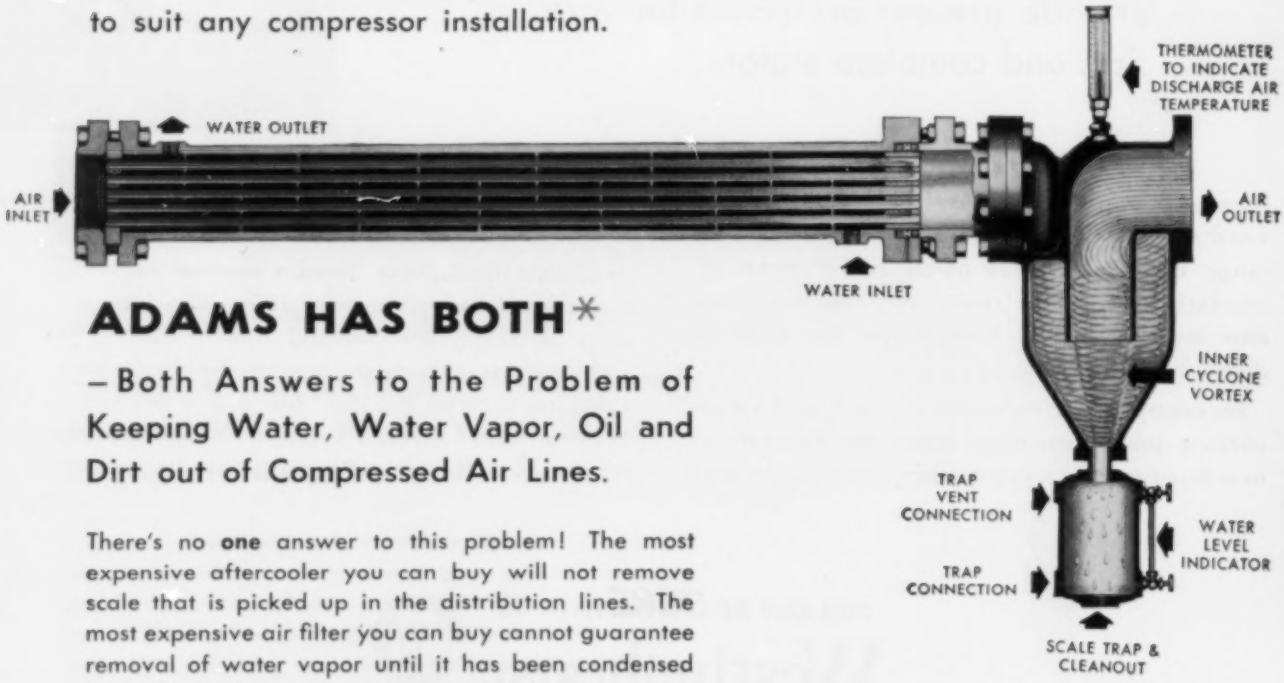

ADAMS HAS BOTH*

– Both Answers to the Problem of Keeping Water, Water Vapor, Oil and Dirt out of Compressed Air Lines.

There's no **one** answer to this problem! The most expensive aftercooler you can buy will not remove scale that is picked up in the distribution lines. The most expensive air filter you can buy cannot guarantee removal of water vapor until it has been condensed by cooling. That's why Adams makes both.

*PORO-STONE AIR FILTER

1. Centrifugal separation of dirt and liquids.
2. Drainage to trap directed by vertical cast-in slots.
3. Continuous, fully automatic trap action.
4. Rapid diffusion and filtration through permanent, cleanable Poro-Stone.
5. Clean, dry air at practically unchanged pressure. Standard, stocked sizes handle from 10 to 700 cfm.
6. Easily installed in either vertical or horizontal pipe line.

SEND FOR BULLETIN 177 TO:

R. P. ADAMS CO., INC.

209 EAST PARK DRIVE
BUFFALO 17, N. Y.

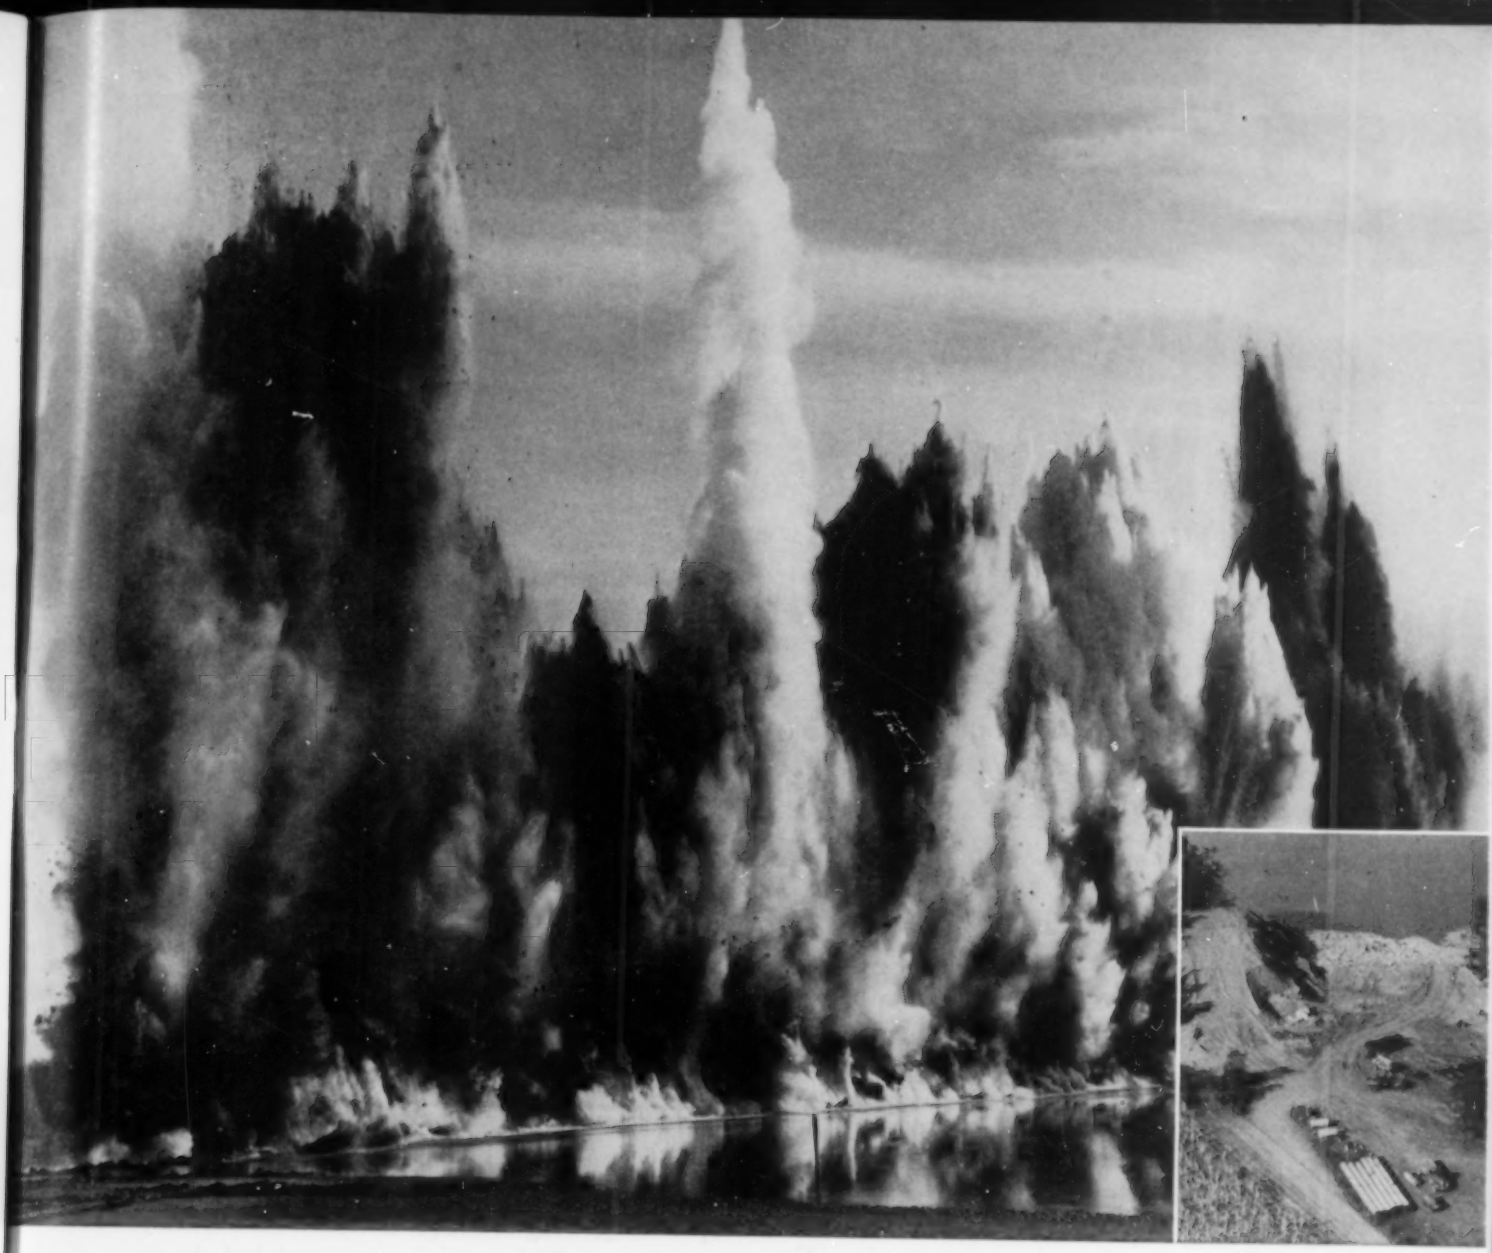

WHEN PIPELINES CROSS WATER explosives research pays off

The tremendous power of dynamite, skillfully and ingeniously handled, made it economically possible to cross the wide, deep Tennessee River (inset above) with two parallel pipelines, 50 feet apart. Trenches blasted underwater through hard red clay in the shallows, and lime rock in the 40-foot-deep channel, opened the way for speedy dredging operations . . . another example of the efficiency of modern explosives and blasting methods.

Hercules' research in the pioneering and development of explosives and our extensive service facilities are available to help you in solving blasting problems on construction jobs or in mining and quarrying operations.

Explosives Department

HERCULES POWDER COMPANY

INCORPORATED

932 King St., Wilmington 99, Del.

Birmingham, Ala.; Chicago, Ill.; Duluth, Minn.; Hazleton, Pa.; Joplin, Mo.; Los Angeles, Cal.; New York, N. Y.; Pittsburgh, Pa.; Salt Lake City, Utah; San Francisco, Cal.

XR54-6

Rx Just what the "DOCTOR" ordered!

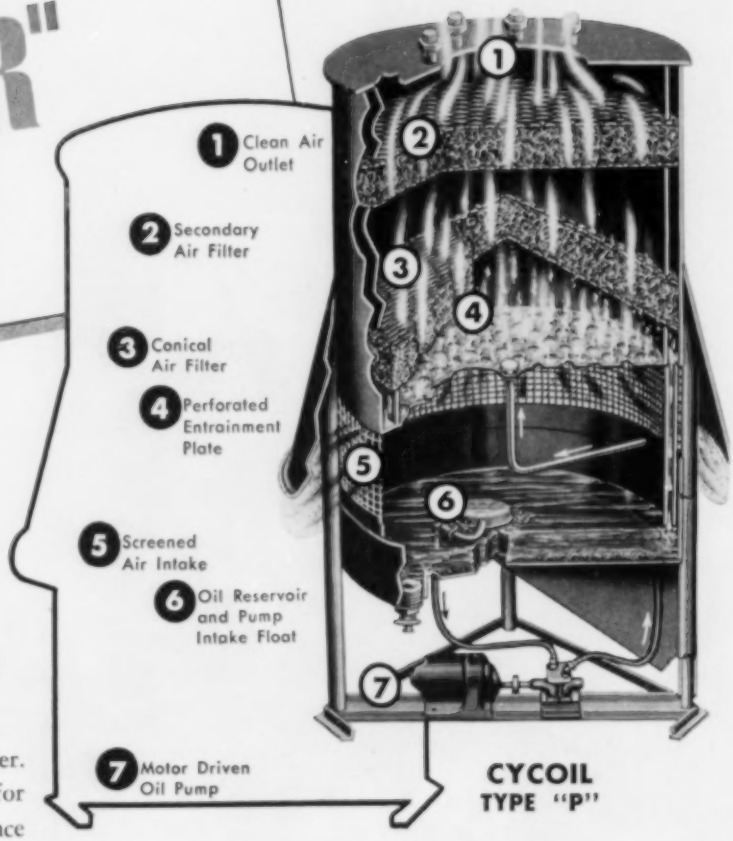
1 Clean Air Outlet
2 Secondary Air Filter
3 Conical Air Filter
4 Perforated Entrainment Plate
5 Screened Air Intake
6 Oil Reservoir and Pump Intake Float
7 Motor Driven Oil Pump
CYCOIL TYPE "P"

NEW LOW RESISTANCE CYCOIL OIL BATH AIR CLEANER KEEPS PACE WITH MODERN ENGINE DESIGN

The "doctor" in this instance was the engine designer. Wider use of turbo-chargers and pressure blowers for scavenging dictated the need for a new low resistance oil bath cleaner.

The Type "P" Cycoil utilizes a new principle in oil bath air filters—a perforated entrainment plate. The plate, over which oil flows from a central distributing head, is placed in the air stream. Its metered orifices are calibrated to increase the velocity of air flow through the openings to entrain the oil that tends to spill over the edges and distribute air flow uniformly over the area. With entrainment accomplished, the air then passes upward through primary and secondary filters for removal of its dust and oil content.

The new low resistance Cycoil is available in two types —(1) Type "P" with standard metered orifices for engines operating from 50% of rated capacity to maximum rating and (2) Type "PV", which by adding Vari-flow valves to orifice openings, assures sustained high cleaning efficiency from as low as 10% of rating to full capacity. For complete product information, call your local AAF representative or write direct for Bulletin No. 160.



Write For Bulletin No. 160

American Air Filter

COMPANY, INC.
402 Central Avenue, Louisville 8, Kentucky
American Air Filter of Canada, Ltd., Montreal, P. Q.

Circle 35A on reply card

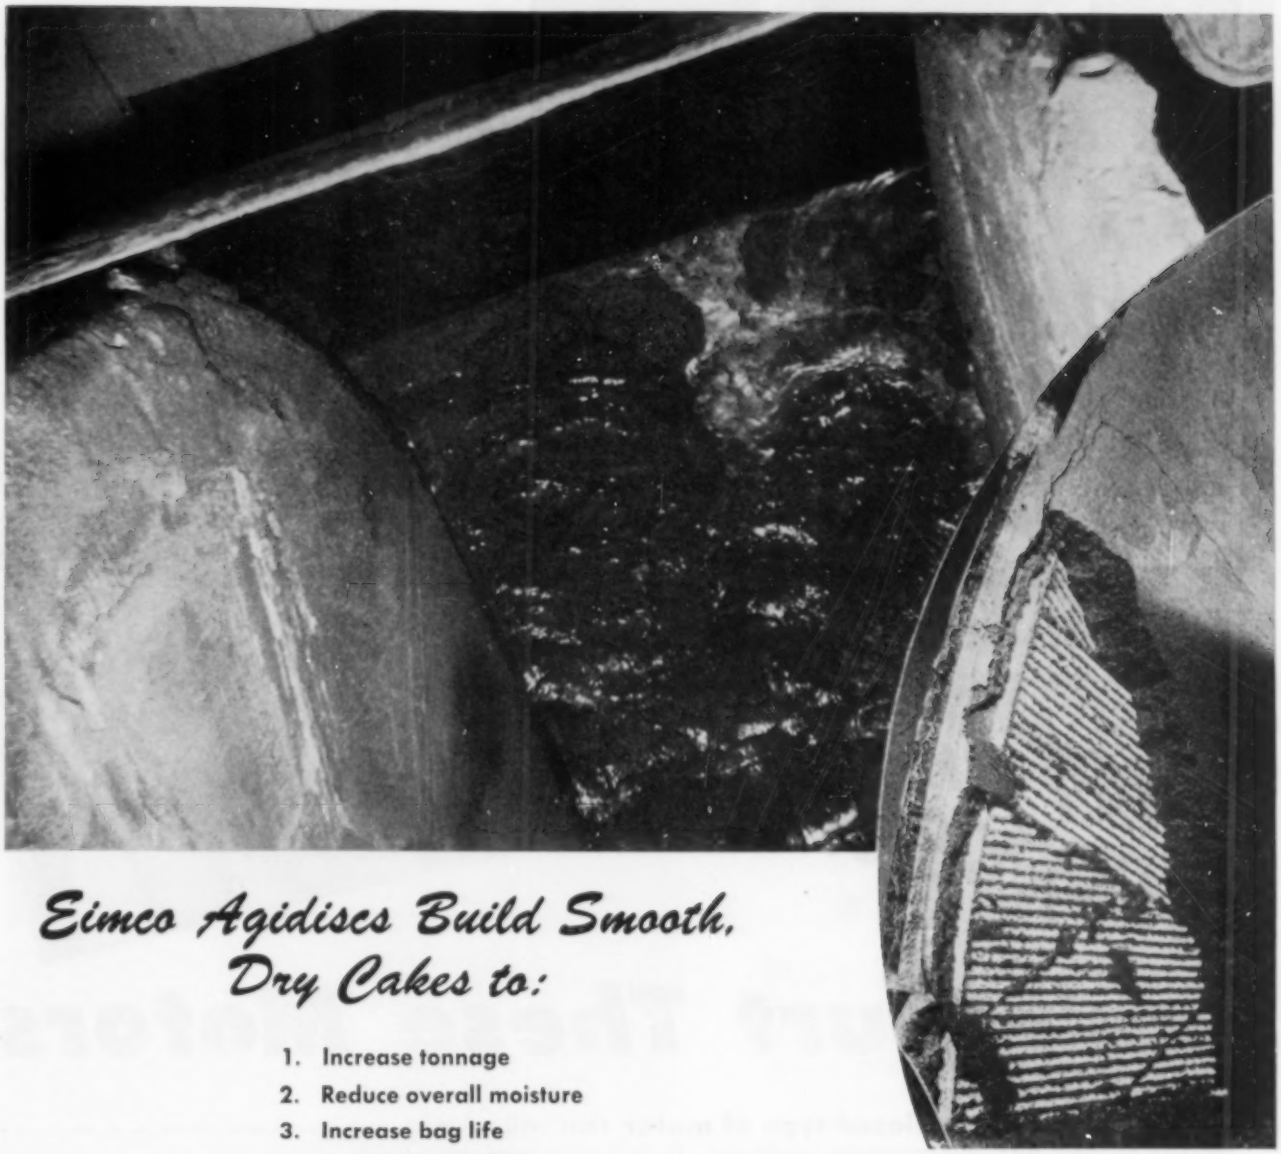

Eimco Agidiscs Build Smooth, Dry Cakes to:

1. Increase tonnage
2. Reduce overall moisture
3. Increase bag life
4. Speed dewatering
5. Increase profits

Fast settling solids in metallurgical slurries are easily kept suspended in solution by the gentle agitating motion of the Eimco Agidisc filter.

This action, in the filter, evenly distributes all particles, regardless of size, so that the entire surface of the disc is covered with a cake of even thickness. Cake thus formed may be dewatered and dried uniformly so that there are no real wet spots or dry spots.

Metallurgical plants using Eimco Agidisc filters are enjoying greater capacity per square foot of filter area per hour (20% better) and lower moisture content in the cake.

Let an Eimco Engineer tell you how the Agidisc works. Whether or not it will make more money for you.

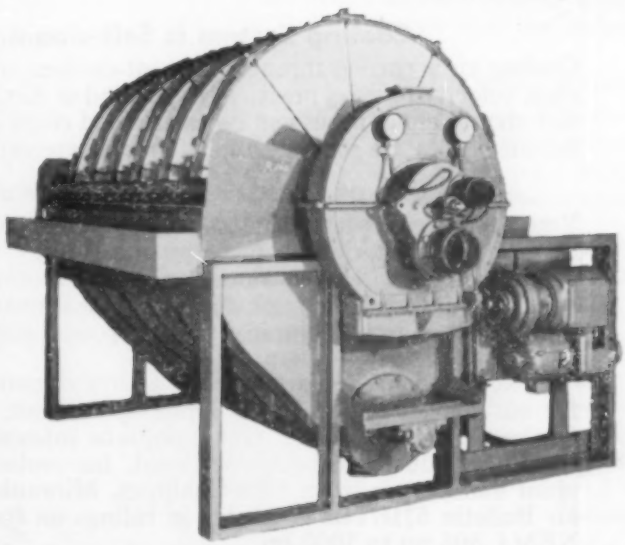

B-57

THE EIMCO CORPORATION

Salt Lake City, Utah—U.S.A. • Export Offices: Eimco Bldg., 52 South St., New York City

New York, N. Y. Chicago, Ill. San Francisco, Calif. El Paso, Texas Birmingham, Ala. Duluth, Minn. Kellogg, Ida. London, Eng. Paris, France Milan, Italy

Circle 36A on reply card

ALLIS-CHALMERS
Totally-Enclosed Fan-Cooled MOTORS

INDOORS or OUT

DIRT and CORROSION

Can't Hurt These Motors

Here is a totally-enclosed type of motor that will solve many of your dirt and corrosion problems. Install anywhere, indoors or out.

Cooling System is Self-cleaning

Cooling air is carried through the heat-exchanger tubes with sufficient velocity to expel practically any kind of dirt. If oily or sticky dirt should cling, tubes can be ramrodded clean in a few minutes because tubes are straight and tube ends are exposed.

Choice of Corrosion-resistant Materials

You can lick corrosion with this motor, too. Tubes are available in a variety of materials to meet practically any corrosive atmospheric condition. Allis-Chalmers tube-type motors have long and successful experience in such difficult applications as caustic plants, refineries and petrochemical plants, power plants with fly ash problems and many others.

Next time you need a motor for a dirty or corrosive location or for outdoor operation in all kinds of weather, call your Allis-Chalmers District Office. Get complete information on Allis-Chalmers tube-type totally-enclosed, fan-cooled and explosion-proof motors. Or write Allis-Chalmers, Milwaukee 1, Wisconsin, for Bulletin 51B7149. Available in ratings on frames larger than NEMA 505 up to 3000 hp.

A-4222

Sold . . .
Applied . . .
Serviced . . .

by Allis-Chalmers Authorized Distributors, Certified Service Shops and Sales Offices throughout the country.

CONTROL — Manual, magnetic and combination starters; push button stations and components for complete control systems.

TEXROPE V-belts in all sizes and sections, standard and *Vari-Pitch* sheaves, speed changers.

PUMPS — Integral types from ¾ in. to 72 in. discharge and up.

Texrope and Vari-Pitch are Allis-Chalmers trademarks.

ALLIS-CHALMERS

Circle 37A on reply card

NOW— ROTARY OR PERCUSSION DRILLING with One Machine!

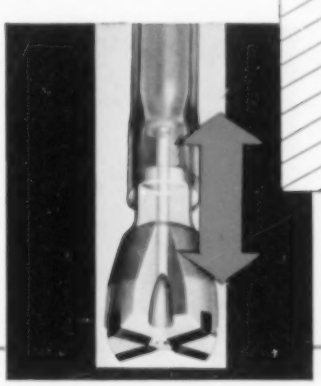

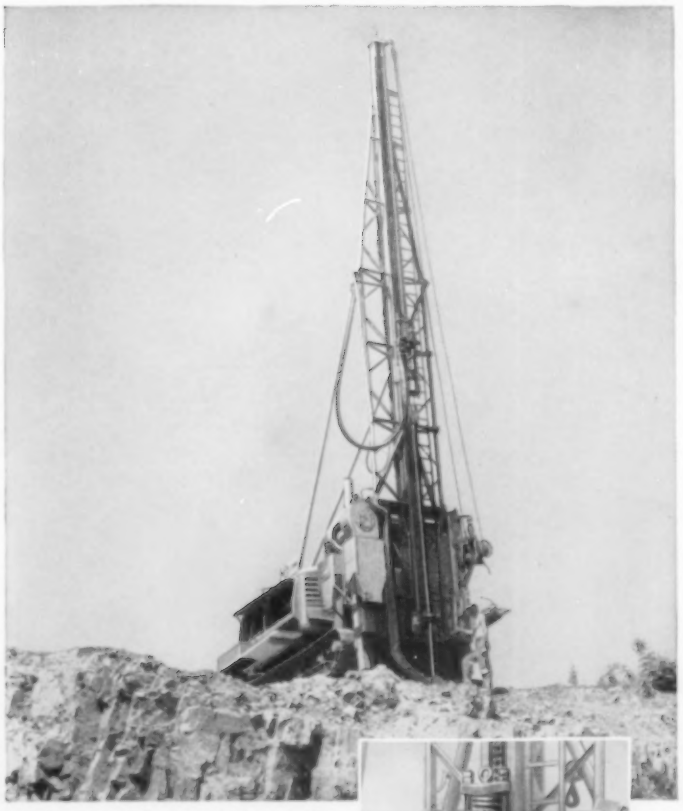

Powerful air-operated piston drill strikes 200 blows per minute—uses Carset bits up to 6½" and drills from 10 to 50 Ft. per hour, depending on the rock.



The rotary drill head is operated by powerful twin multivane-type air-motors—uses rotary type bits up to 9" and drills 20 to 150 feet per hour depending on the rock.



NEW UNIVERSAL QUARRYMASTER

permits fastest drilling in any type of ground!

Here is the first *universal drill*—a completely self-contained, self-powered and self-propelled machine with interchangeable rotary and percussion drill units.

When equipped with the powerful *piston drill*, the Quarrymaster can drill any type of material from the hardest rock to consolidated top soils and hard pans. When a *rotary* drilling head is applied, it is ideal for the softer or less abrasive rocks and overburdens.

In open pit mining, whether your cap rock is hard and the ore soft, or vice versa, the Quarrymaster will drill either one at the fastest rate and the cheapest way possible. If you are a drilling contractor or quarry operator the dual principle gives you the right drill for any rock conditions, anywhere.

Conversion from one type to the other takes but a few hours and consists of simply removing one drill from the tower and replacing it with the other.

Call your Ingersoll-Rand branch office today for complete information on the new Quarrymaster. Or write for your copy of Bulletin No. 4153.

Ingersoll-Rand

11 Broadway, New York 4, N. Y.

5-72

ROCK DRILLS • COMPRESSORS • AIR TOOLS • TURBO BLOWERS
CONDENSERS • CENTRIFUGAL PUMPS • OIL & GAS ENGINES

Circle 38A on reply card

Compressor squeezes pennies as well as breezes . . . *with help of TIMKEN® bearings*

A LARGE automobile assembly plant uses this compressor for part of its general air supply. It can be counted on for dependable performance with minimum maintenance, providing maximum savings in operating costs.

One reason: It's an Ingersoll-Rand. Another reason: It has Timken® tapered roller bearings on the crankshaft.

Timken bearings are just the ticket for compressors. Their tapered design permits them to take radial and thrust loads in any combination. They keep the crankshaft in positive alignment, reduce wear on related parts.

When it comes to heavy loads you can't beat Timken bearings. They carry the load on lines of contact between rollers and races giving them extra load-carrying capacity.

Since Timken bearings keep housings and shafts concentric, closures are more effective. Dirt and moisture stay out—lubricant stays in.

When it comes to buying or building all kinds of machines, your best bet is Timken bearings. We do everything possible to make sure they give you full value. In fact we even make our own steel. We're the only U. S. bearing manufacturer that does. Next time make sure the bearings in your machinery have the trade-mark "Timken". The Timken Roller Bearing Company, Canton 6, Ohio. Canadian plant: St. Thomas, Ontario. Cable address: "TIMROSCO".

TIMKEN ROLLER BEARING EQUIPPED

This symbol on a product means its bearings are the best.

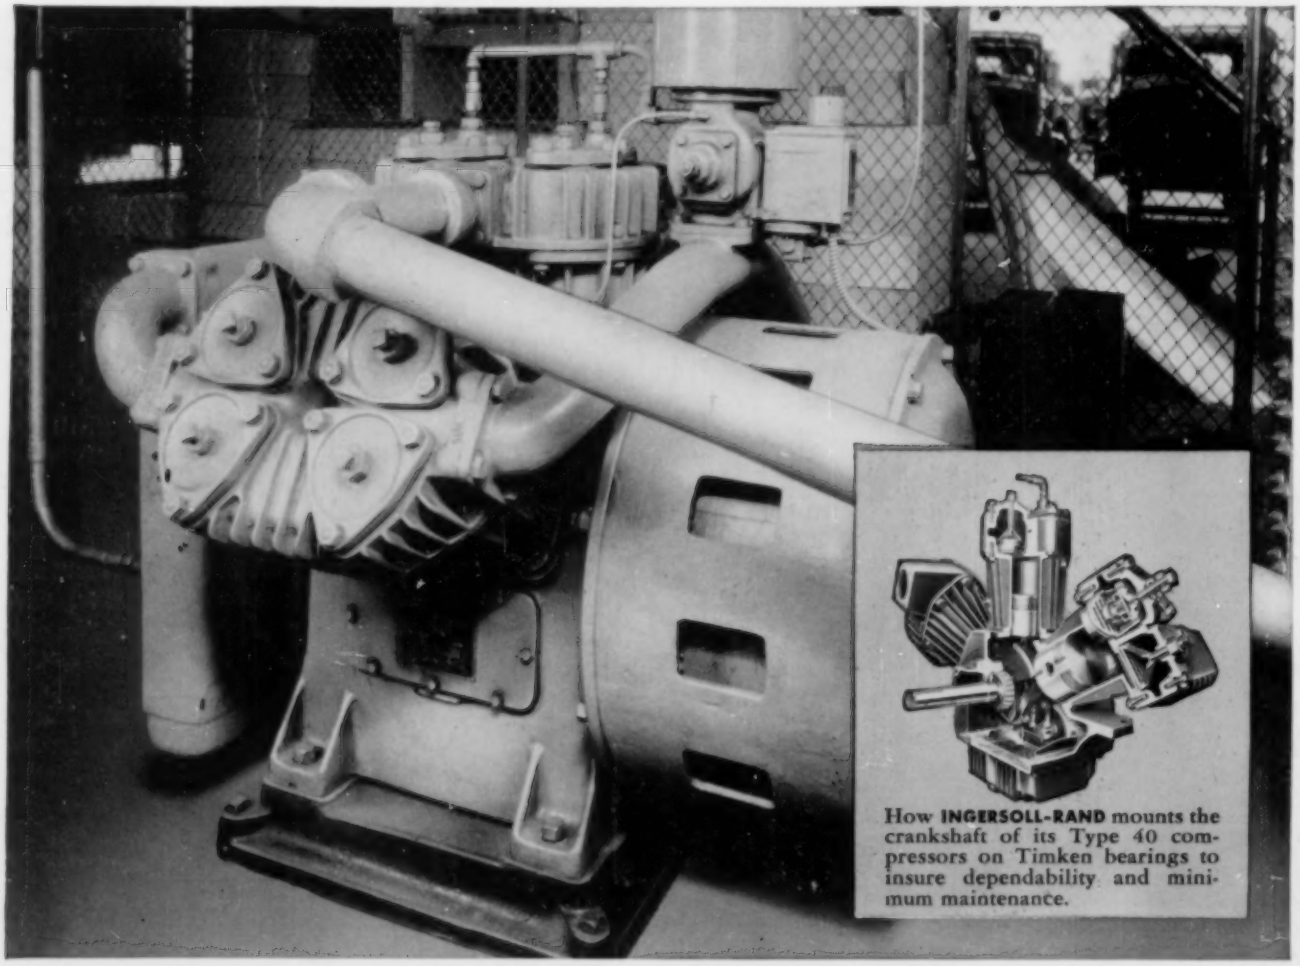

How **INGERSOLL-RAND** mounts the crankshaft of its Type 40 compressors on Timken bearings to insure dependability and minimum maintenance.

WE MAKE OUR OWN STEEL

The special grade alloy steel which gives Timken bearings their strength and resistance to wear is made in our own steel mills.

The Timken Roller Bearing Company is the acknowledged leader in: 1. advanced design; 2. precision manufacturing; 3. rigid quality control; 4. special analysis steels.

TIMKEN

TRADE-MARK REG. U. S. PAT. OFF.

TAPERED ROLLER BEARINGS

NOT JUST A BALL ○ NOT JUST A ROLLER ▭ THE TIMKEN TAPERED ROLLER ▭ BEARING TAKES RADIAL ◎ AND THRUST → ◎ ← LOADS OR ANY COMBINATION → ◎ ←

Circle 39A on reply card